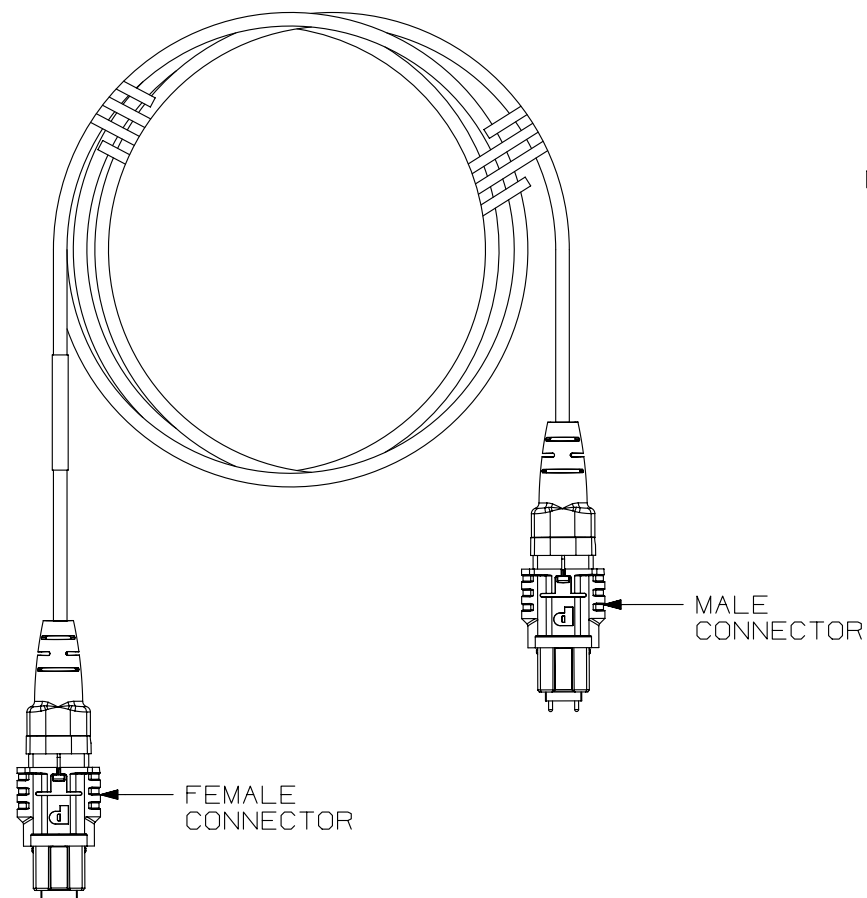


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



FEMALE TO MALE
PAN MPO PATCHCORD SHOWN

NOTES:

- 1. SEE SHEETS 2,3,& 4 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
- 2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITY.
- 3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
- 4. TESTED TO EIA/TIA 568-C.3.
- 5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

R	05-21-13	MC	JDK	SFDO	RELEASED TO PRODUCTION		10F093BF-DC
REV	DATE	BY	CHK	APR	DESCRIPTION		ECN


TITLE FIBER OPTIC PATCH CORD PAN MPO TO PAN MPO CUSTOMER DRAWING				
ITEM REVISION NAME 10F093BF/00			PANDUIT	
DATASET FILE NAME 10F093BF_DC/00A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)				
.x ±		.xxx ± .010 (0.3)		
.xx ± .03 (0.8)		ANGLES ±		
DRAWN BY MC			DATE 05-14-13	
CHK JDK		SCALE NONE		
DRAWING NUMBER: 10F093BF-DC			SHT 1 OF 4	
THIRD ANGLE PROJECTION		SIZE A		

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FEMALE TO FEMALE - PAN MPO TO PAN MPO FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				MTP CONNECTOR			
	RATING	FIBER TYPE	COUNT	COLOR	PERFORMANCE	POLARITY	BOOT COLOR	
F5TRP7N7NANM***	PLENUM (OFNP)	OM2	12	ORANGE	STANDARD	METHOD A	BLACK	
FXTRP7N7NANM***		OM3		AQUA	STANDARD			METHOD B
FXTRP7N7NXNM***					OPTIMIZED			
FXTRP7N7NBNM***					STANDARD			
FXTRP7N7NYNM***					OPTIMIZED			
FZTRP7N7NANM***			OM4		AQUA	STANDARD		
FZTRP7N7NXNM***		OPTIMIZED						
FZTRP7N7NBNM***		STANDARD		METHOD B				
FZTRP7N7NYNM***		OPTIMIZED						
F5TRL7N7NANM***		LOW SMOKE ZERO HALOGEN (LSZH)	OM2	12	ORANGE	STANDARD		METHOD A
FXTRL7N7NANM***	OM3		AQUA		STANDARD	METHOD B		
FXTRL7N7NXNM***					OPTIMIZED			
FXTRL7N7NBNM***					STANDARD			
FXTRL7N7NYNM***					OPTIMIZED			
FZTRL7N7NANM***				OM4	AQUA		STANDARD	METHOD A
FZTRL7N7NXNM***	OPTIMIZED							
FZTRL7N7NBNM***	STANDARD		METHOD B					
FZTRL7N7NYNM***	OPTIMIZED							

*** - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

						TITLE FIBER OPTIC PATCH CORD PAN MPO TO PAN MPO CUSTOMER DRAWING						
						ITEM REVISION NAME 10F093BF/00						
						DATASET FILE NAME 10F093BF_DC/00A						
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x ± .xxx ± .010 (0.3) .xx ± .03 (0.8) ANGLES ±						
						MATERIAL: SEE NOTES SHEET 1						
R 05-21-13 MC JDK SPDO RELEASED TO PRODUCTION						DRAWING NUMBER: 10F093BF-DC						
						 THIRD ANGLE PROJECTION						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 4	SIZE
							MC	05-15-13	JDK	NONE		A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MALE TO MALE - PAN MPO TO PAN MPO FIBER OPTIC PATCH CORD								
PANDUIT PART NO.	CABLE				MTP CONNECTOR			
	RATING	FIBER TYPE	COUNT	COLOR	PERFORMANCE	POLARITY	BOOT COLOR	
F5TRP8N8NANM***	PLENUM (OFNP)	OM2	12	ORANGE	STANDARD	METHOD A	BLACK	
FXTRP8N8NANM***		OM3		AQUA	STANDARD			OPTIMIZED
FXTRP8N8NXNM***					STANDARD			OPTIMIZED
FXTRP8N8NBNM***					STANDARD			OPTIMIZED
FXTRP8N8NYNM***					STANDARD			OPTIMIZED
FZTRP8N8NANM***		OM4	AQUA	STANDARD	METHOD A	BLACK		
FZTRP8N8NXNM***				OPTIMIZED	METHOD B			
FZTRP8N8NBNM***				STANDARD				
FZTRP8N8NYNM***				OPTIMIZED				
F5TRL8N8NANM***		LOW SMOKE ZERO HALOGEN (LSZH)	OM2	12	ORANGE	STANDARD		METHOD A
FXTRL8N8NANM***	OM3		AQUA		STANDARD	OPTIMIZED		
FXTRL8N8NXNM***					STANDARD	OPTIMIZED		
FXTRL8N8NBNM***					STANDARD	OPTIMIZED		
FXTRL8N8NYNM***					STANDARD	OPTIMIZED		
FZTRL8N8NANM***	OM3		AQUA	STANDARD	METHOD A	BLACK		
FZTRL8N8NXNM***				OPTIMIZED	METHOD B			
FZTRL8N8NBNM***				STANDARD				
FZTRL8N8NYNM***				OPTIMIZED				


*** - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

B

B

A

A


								TITLE FIBER OPTIC PATCH CORD PAN MPO TO PAN MPO CUSTOMER DRAWING					
								ITEM REVISION NAME 10F093BF/00		PANDUIT			
								DATASET FILE NAME 10F093BF_DC/00A					
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)					MATERIAL: SEE NOTES SHEET 1
								.x ± .xxx ± .010 (.3) .xx ± .03 (.08) ANGLES ±		DRAWING NUMBER: 10F093BF - DC			
								 THIRD ANGLE PROJECTION					
R	05-21-13	MC	JDK	SPDO	RELEASED TO PRODUCTION								10F093BF - DC
REV	DATE	BY	CHK	APR	DESCRIPTION		ECN	DRAWN BY MC	DATE 05-15-13	CHK JDK	SCALE NONE	SHT 3 OF 4	SIZE A

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FEMALE TO MALE - PAN MPO TO PAN MPO FIBER OPTIC PATCH CORD

PANDUIT PART NO.	CABLE				MTP CONNECTOR		
	RATING	FIBER TYPE	COUNT	COLOR	PERFORMANCE	POLARITY	BOOT COLOR
F5TRP7N8NANM***	PLENUM (OFNP)	OM2	12	ORANGE	STANDARD	METHOD A	BLACK
FXTRP7N8NANM***		OM3		AQUA	STANDARD		
FXTRP7N8NXNM***					OPTIMIZED		
FXTRP7N8NBNM***					STANDARD	METHOD A	
FXTRP7N8NYNM***					OPTIMIZED		
FZTRP7N8NANM***			OM4		AQUA	STANDARD	METHOD A
FZTRP7N8NXNM***		OPTIMIZED					
FZTRP7N8NBNM***		STANDARD		METHOD B			
FZTRP7N8NYNM***		OPTIMIZED					
F5TRL7N8NANM***		LOW SMOKE ZERO HALOGEN (LSZH)	OM2	12	ORANGE	STANDARD	METHOD A
FXTRL7N8NANM***	OM3		AQUA		STANDARD	METHOD B	
FXTRL7N8NXNM***					OPTIMIZED		
FXTRL7N8NBNM***					STANDARD	METHOD A	
FXTRL7N8NYNM***					OPTIMIZED		
FZTRL7N8NANM***				OM3	AQUA	STANDARD	METHOD A
FZTRL7N8NXNM***	OPTIMIZED						
FZTRL7N8NBNM***	STANDARD		METHOD B				
FZTRL7N8NYNM***	OPTIMIZED						

*** - DENOTES PATCH CORD LENGTH, WHERE M = METERS AND F = FEET

						TITLE FIBER OPTIC PATCH CORD PAN MPO TO PAN MPO CUSTOMER DRAWING						
						ITEM REVISION NAME 10F093BF/00						
						DATASET FILE NAME 10F093BF_DC/00A						
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm) .x ± .1 (2.54) .xxx ± .005 (.127) .xx ± .01 (.25) ANGLES ± 5°					MATERIAL: SEE NOTES SHEET 1	
R	05-21-13	MC	JDK	SFDO	RELEASED TO PRODUCTION	DRAWING NUMBER: 10F093BF-DC						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY MC	DATE 05-15-13	CHK JDK	SCALE NONE	SHT 4 OF 4	SIZE A