

# PViQ™ Networked Power Outlet Units for Nexus 7.5 Power Supply for Net-Access™ Switch Cabinets (CN\*)

# PANDUIT®

SPECIFICATION SHEET

## specifications

PViQ™ Power Outlet Units shall integrate with the Panduit® PIM™ Software Platform to enable intelligent management of the in-cabinet power usage. This system helps to quickly identify and resolve power issues, find and reclaim available or underutilized power capacity and automate collection of real-time and accurate power information. The units shall be Cisco compatible and designed to meet the Nexus 7000 series power requirements. The units shall have local and remote monitoring for power consumption and easy upgradable firmware updates and be capable of mounting vertically or horizontally to the Net-Access™ and Net-SERV® Cabinets or Panduit 4 post rack. The power outlet units shall have 60 Amp circuits and shall have multiple outlet options with standard IEC and L6-30R locking NEMA compliant receptacles. Power outlet units shall have ten foot cords using IEC 309 plugs and black powder-coated finish.



## technical information

<b>Dimensions:</b>	PZ1B2G3BN03L1: 19.0"H x 3.4"W x 9.0"D (483mm x 86mm x 229mm) QZ1B2G5BN2271: 66.3"H x 2.3"W x 3.45"D (1683mm x 58mm x 87mm) QZ1B2G3BN03L1: 33"H x 2.3"W x 3.45"D (978mm x 58mm x 87mm) QZ1B2G6BN06L1: 66.3"H x 2.3"W x 3.45"D (1683mm x 58mm x 87mm)
<b>Power outlet unit mounting:</b>	Horizontal power strips provide up to three outlets and mount to any EIA 19" rack or cabinet. Vertical power strips provide up to 22 outlets and do not occupy any rack spaces
<b>Power outlet unit packaging:</b>	All power outlet units include 10' power cords, mounting brackets, screws, and tool-less button mounting

## key features and benefits

<b>Remote access to power consumption data</b>	Web-based GUI provides global network access to real-time power information to improve data center energy efficiency and reduce operating costs through analysis of power usage and trends
<b>Integrates with Panduit® PIM™ Software</b>	Aggregates power and environmental information through a single web based GUI to facilitate easy analysis of data
<b>Integrated power monitoring and management</b>	On unit display provides true RMS Input Current Load (in amps) for each power circuit or phase to properly load balance and maximize power circuits, improving data center power management and planning
<b>Alarm messaging capability</b>	User defined alarm/messaging capabilities when parameters have been exceeded to maximize network availability
<b>Mounting buttons</b>	Allows tool less mounting of power strips for faster installations
<b>Certification/ agency approvals</b>	Complies with UL and cUL Listed 60950

## applications

Panduit's PViQ™ Networked Power Outlet Units can either be utilized standalone for smaller installations or seamlessly feed information directly into the Physical Infrastructure Manager™ (PIM™) Software Platform for larger data centers. The Panduit POU's provide continuous real-time power monitoring via the network for enhanced system management and reliability. The Panduit POU's safely and efficiently manage and distribute power to allow multiple

pieces of equipment to share a single power connector to enhance scalability of network build outs. Mounting flexibility allows quick and easy installation and when used with Panduit® Net-Access™ and Net-SERV® Cabinets, the user receives a complete networking solution that will satisfy data center requirements today and into the future.

### PIM™ Software Platform and Modules

<b>Base functionality module:</b>	PIM-BASE
<b>Power module:</b>	PIM-POWER

### PanView IQ™ IEC60320 C14 to NEMA 5-15R Adapters

<b>PViQ™ C14 Power Adapter (US):</b>	PVQ-C14ADPTR-S
<b>PViQ™ C14 Power Adapter (Japan):</b>	PVQ-C14ADPTR-J

### Horizontal 3~ 208V, 60A, 3 L6-30R Outlets

<b>Phase/Breaker (X,Y,Z) Monitoring:</b>	PZ1B2G3BN03L1
--	---------------

### Vertical 3~ 208V, 60A, 16 IEC-13, 4 IEC-19 and 2 L6-30R Outlets

<b>Phase/Breaker (X,Y,Z) Monitoring:</b>	QZ1B2G5BN2271
--	---------------

### Vertical 3~ 208V, 60A, 3 L6-30R Outlets

<b>Phase/Breaker (X,Y,Z) Monitoring:</b>	QZ1B2G3BN03L1
--	---------------

### Vertical 3~ 208V, 60A, 6 L6-30R Outlets

<b>Phase/Breaker (X,Y,Z) Monitoring:</b>	QZ1B2G6BN06L1
--	---------------

### Net-Access™ 7018 Cabinets for Use in Hot Aisle/Cold Aisle Applications

<b>45 RU, no doors, no side panels, 7018 inlet, and exhaust ducting:</b>	CN3847018NU
--	-------------

<b>45 RU, perforated split doors, no side panels, 7018 inlet, and exhaust ducting:</b>	CN5847018NU
--	-------------

<b>45 RU, perforated split doors, side panels, 7018 inlet, and exhaust ducting:</b>	CN4847018NU
---	-------------

<b>42 RU, perforated split doors, side panels, 7018 inlet, and exhaust ducting:</b>	CN48470182NU
---	--------------

<b>45 RU, perforated split doors, no side panels, 7018 inlet, and exhaust ducting, cage nut rails:</b>	CN5847018CNU
--	--------------

<b>45 RU, perforated split doors, side panels, vertical blanking panels, 7018 inlet ducting:</b>	CN484C7018NU
--	--------------

<b>42 RU, perforated split doors, side panels, vertical blanking panels, 7018 inlet ducting, cage nut rails:</b>	CN484C70182CNU
--	----------------

### Net-Access™ 7018 Cabinets for Use in Cold Aisle Containment Applications

<b>45 RU, perforated split doors, side panels, vertical blanking panels, 7018 inlet ducting:</b>	CN484C7018NU
--	--------------

<b>42 RU, perforated split doors, side panels, vertical blanking panels, 7018 inlet ducting, cage nut rails:</b>	CN484C70182CNU
--	----------------

<b>45 RU, front perforated split door, rear solid split door, no side panels, vertical blanking panels, 7018 inlet ducting:</b>	CN584H7018
---	------------

<b>7018 vertical exhaust ducting height adjustable from 21" to 45" (534mm to 1143mm):</b>	CVED40VEN
---	-----------

<b>7018 vertical exhaust ducting height adjustable from 42" to 70" (1067mm to 1778mm):</b>	CVED40VE
--	----------

### Power Cord C13 – C14 End


<b>1.5 feet:</b>	PC14C13BL1.5
<b>2 feet:</b>	PC14C13BL2
<b>3 feet:</b>	PC14C13BL3
<b>4 feet:</b>	PC14C13BL4

<b>Power Cord Retainers</b>	
-----------------------------	--

<b>C13 for 2.00" POU body</b>	PRPC13W-2.0-X
<b>C13 for 2.25" POU body</b>	PRPC13W-2.25-X
<b>C19 for 2.00" POU body</b>	PRPC19Y-2.0-X
<b>C19 for 2.25" POU body</b>	PRPC19Y-2.25-X

<b>For additional power cord information, refer to Power Outlet Unit Power Cords Spec Sheet WASP27--WW-ENG.</b>	
<b>*For additional information on Net-Access™ Cabinets, refer to brochure SA-RKCB19.</b>	

# PViQ™ Networked Power Outlet Units for Nexus 7.5 Power Supply for Net-Access™ Switch Cabinets (CN)

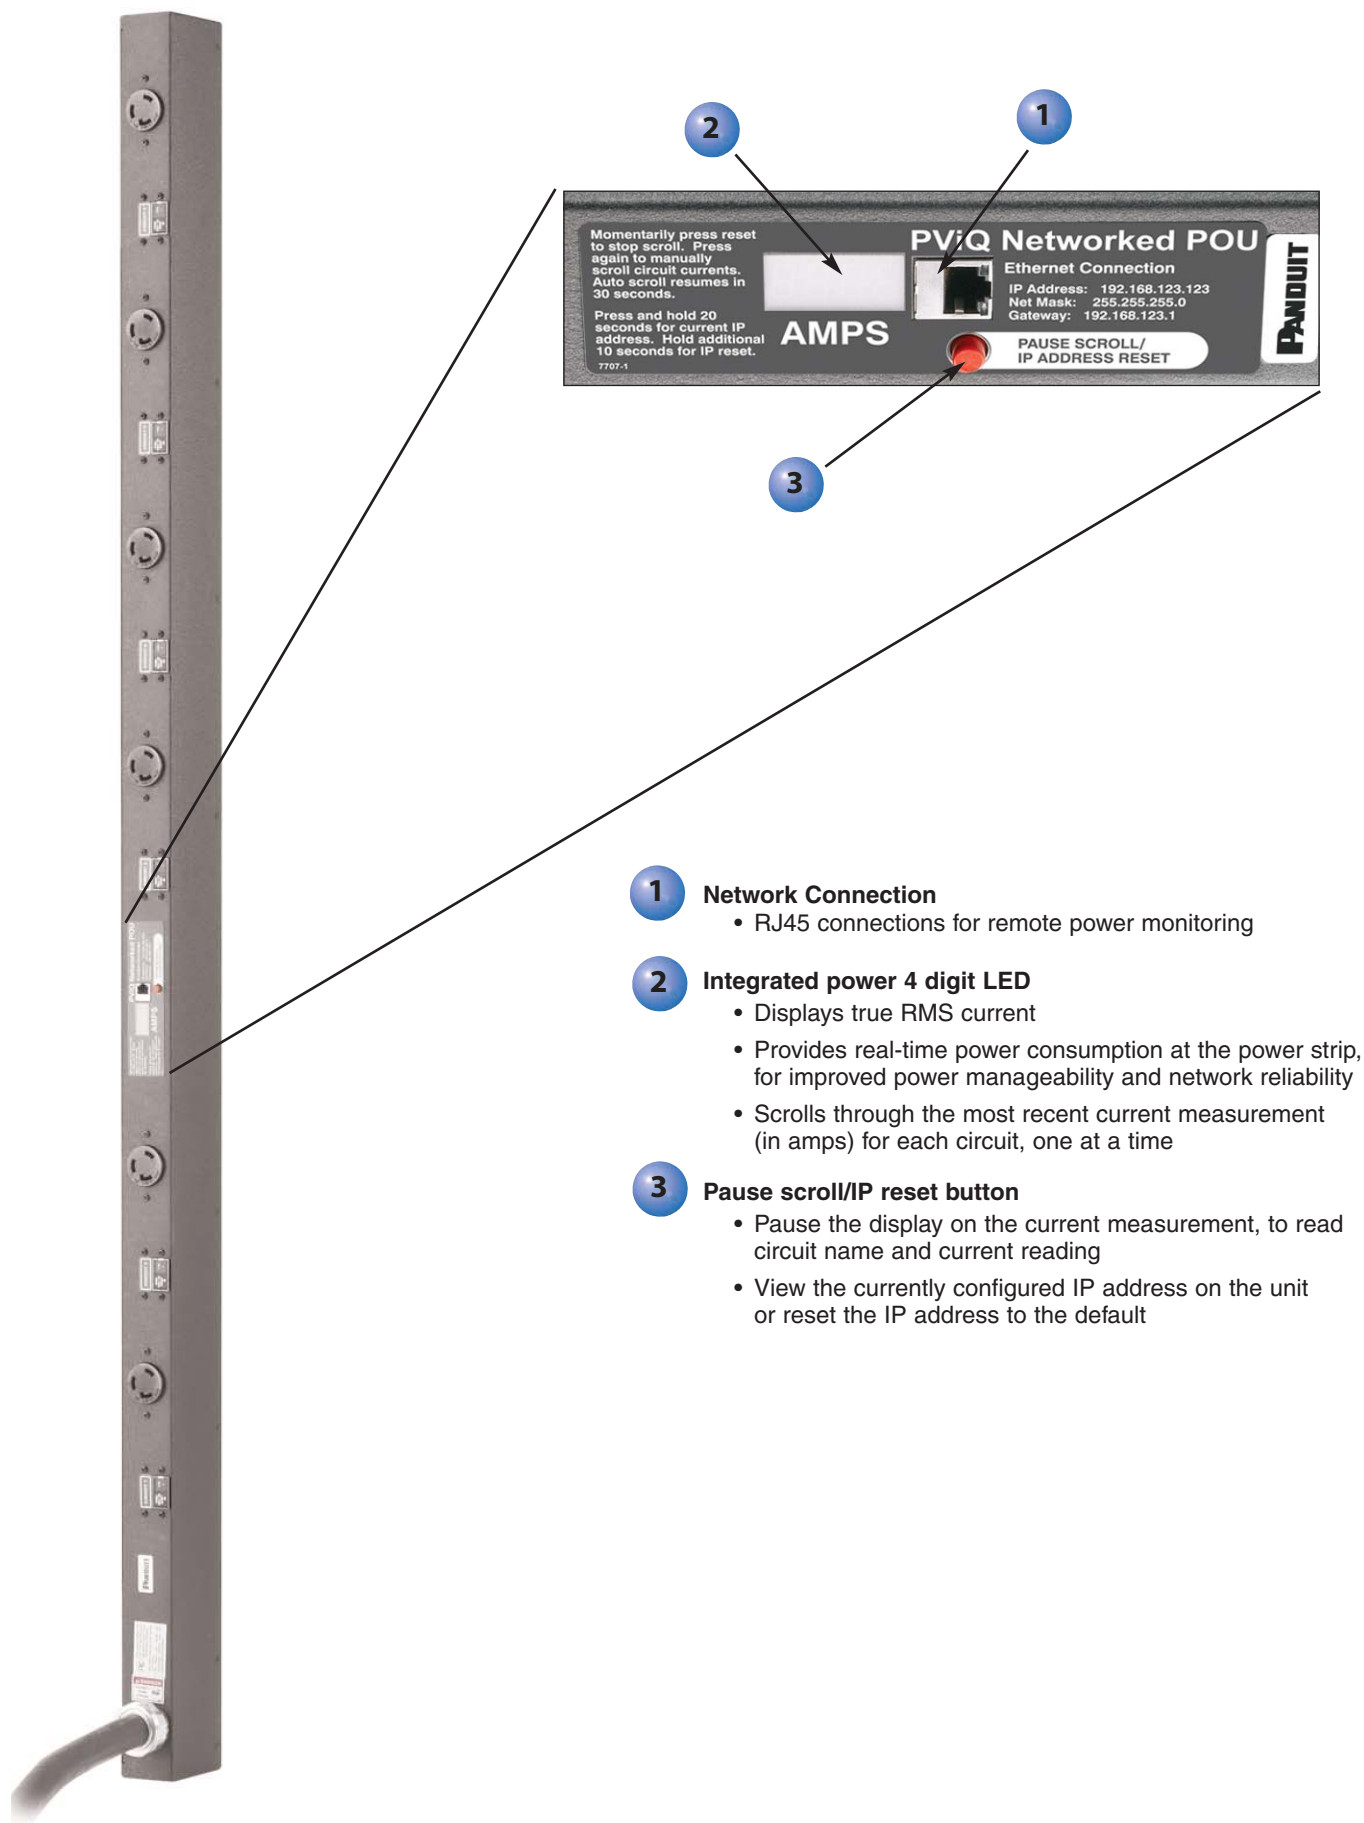


- 1 Network Connection**
  - RJ45 connections for remote power monitoring
- 2 Integrated power 4 digit LED**
  - Displays true RMS current
  - Provides real-time power consumption at the power strip, for improved power manageability and network reliability
  - Scrolls through the most recent current measurement (in amps) for each circuit, one at a time
- 3 Pause scroll/IP reset button**
  - Pause the display on the current measurement, to read circuit name and current reading
  - View the currently configured IP address on the unit or reset the IP address to the default

# PViQ™ Networked Power Outlet Units for Nexus 7.5 Power Supply for Net-Access™ Switch Cabinets (CN)

## Current Monitoring

- Provides real time current power information via a standard web browser

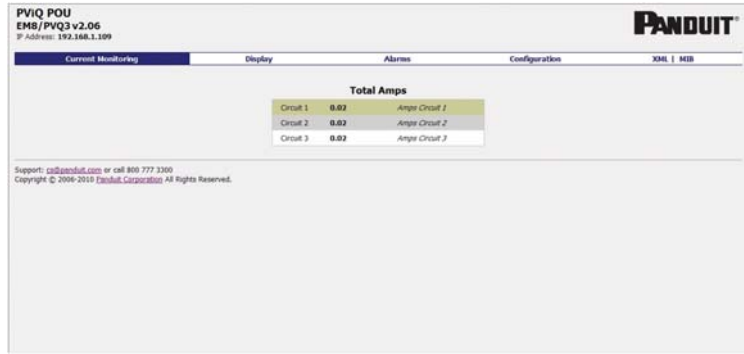

## Display

- Name and location information can be stored for easy identification of POU and individual outlets



## Alarms

- Alarm status provided if current is greater than entered threshold



## Configuration

- Name and location information can be stored for easy identification of POU and individual outlets
- Simple network configuration for easy setup



# PViQ™ Networked Power Outlet Units for Nexus 7.5 Power Supply for Net-Access™ Switch Cabinets (CN)

Back



Front



**PZ1B2G3BN03L1**



**QZ1B2G6BN06L1**



**QZ1B2G5BN2271**

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT®**

©2013 Panduit Corp.  
ALL RIGHTS RESERVED.  
PUSP10--WW-ENG  
7/2013