

TX6A™ 10Gig UTP Copper Cable with Vari-MaTriX Technology

Europe, Middle East,
Africa, Latin America,
Asia Pacific

PANDUIT™
SPECIFICATION SHEET

specifications

Category 6A/Class E_A cable shall be constructed of 23 AWG copper conductors with HDPE Low Smoke Zero Halogen (LSZH), PE Riser (CMR) or PVC (CM). The copper conductors shall be twisted in pairs and separated by a cross-divider. All four pairs shall be surrounded by a metallic Vari-MaTriX tape and a flame retardant jacket. The Vari-MaTriX tape shall minimize the cable diameter and suppress the effects of alien crosstalk while retaining UTP electromagnetic interference immunity. The innovative cable design shall provide installation flexibility as cables can be routed in tight bundles through pathways and spaces.




technical information

Category 6A/Class E_A channel and component performance: Certified channel performance in a 4-connector configuration up to 100m and exceeds the requirements of ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E_A Standards swept up to 650 MHz for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the TX6A 10Gig UTP Copper Cabling System. Certified component performance up to 100m and exceeds the ANSI/TIA-568.2-D Category 6A and IEC 61156-5 Category 6A Standards for supporting 10GBASE-T transmission over twisted-pair cabling systems

Cable diameter:	LSZH Dca: 6.6mm (0.260") nominal LSZH Cca and B2ca: 6.7mm (0.265") nominal Riser (CMR) and PVC (CM): 6.6mm (0.260") nominal
Conductors/insulators:	23 AWG solid copper insulated with flame retardant PE (CMR) or HDPE (LSZH)
Flame rating:	LSZH (Dca): IEC 60332-3-22, 60754-2, 61034-2; EEN 50575: EuroClass Dca-s2,d2,a1 LSZH (Cca): IEC 60332-3-22, 60754-2, 61034-2; EN 50575: EuroClass Cca-s1a-d1-a1 LSZH IEC 60332-3-25, 60754-2, 61034-2; EN 50575: EuroClass Dca-s2,d2,a1 LSZH (B2ca): IEC 60332-3-22, 60754-2, 61034-2; EN 50575: EuroClass B2ca-s1a,d1,a1 Riser (CMR): UL1666 PVC (CM): UL1685
Standards compliance:	UL Listed CMR-LP (0.5A), CM-LP (0.5A)
Certification:	LSZH (Dca) ANATEL 2511-12-6246
PoE compliant:	Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications
Installation tension:	25 lbf (110 N) maximum
Temperature rating:	0°C to 60°C (32°F to 140°F) during installation -20°C to 75°C (-4°F to 167°F) during operation (LSZH, CMR and CM) -20°C to 90°C (-4°F to 194°F) during operation (CMP)
Cable jacket:	HDPE (LSZH) PE Riser (CMR) Low smoke flame retardant PVC PVC (CM): flame retardant PVC
Cable weight:	LSZH Dca 13.1 kg/305mm (28.9 lbs./1000'); 21.5 kg/500mm (47.4 lbs./1640) LSZH Cca and B2ca: 16.5 kg/305mm (36.4 lbs./1000'); 25.1 kg/500mm (55.4 lbs./1640') Riser (CMR) and PVC (CM): 13.1 kg/305mm (28.9 lbs./1000')
Packaging:	LSZH Dca: 15.1 kg/305mm (33.3 lbs./1000'); 22.5 kg/500mm (51.8 lbs./1) LSZH Cca and B2ca 16.5 kg/305mm (36.4 lbs./1000'); 25.1 kg/500mm (55.4 lbs./1640') Riser (CMR) and PVC (CM): 14.1 kg/305mm (31.1 lbs./1000') Package tested to ISTA procedure 1A

key features and benefits

Vari-MaTriX Technology	 Best-in-class cable diameter delivers superior PSANEXT and PSAACRF suppression while retaining UTP EMI immunity
Superior headroom warranty	Provides the highest worst-case margins above the industry standard for both electrical and alien crosstalk performance
Small, round cable design	Improves fill capacity, cable management, reduces required bend radius and allows efficient use of pathways and spaces
Extended temperature range	Allows operation in 75°C (167°F) ambient environment providing error-free performance in high-density cabinets and large cable bundles running PoE+ or PoE++ applications
Highest density	All testing and headroom based on 48-port/1 RU panels
Descending length cable markings	Easy identification of remaining cable to reduce installation time and cable scrap

applications

TX6A 10Gig UTP Copper Cable with Vari-MaTriX Technology

LSZH:	PUL6AV04*-E+ Euroclass Dca-s2,d2,a1
LSZH:	PUZ6AV04*-E+ IEC 60332-3-25
LSZH:	PUY6AV04*-E+ Euroclass Cca-s1a,d1,a1
LSZH:	PUW6AV04*-E+ Euroclass B2ca-s1a,d1,a1
PVC (CM):	PUC6AV04*-EG
Riser (CMR):	PUR6AV04*-G

*To designate color, add suffix BU (Blue), WH (White), IG (International Gray), or YL (Yellow).

For additional cable colors, contact customer service.

+ - G for 305m reels
- D for 500m reels


Country of Origin, China: PUR6AV04

TX6A™ 10Gig UTP Copper Cable with Vari-MaTriX Technology

additional specifications

Mechanical Test	
Ultimate Breaking Strength	> 90 lbf (400 N)
Minimum Bend Radius	4 x cable diameter
Electrical Test	
DC Resistance	<9.38 Ohm per 328 ft. (100m)
DC Resistance Unbalance	<5%
Mutual Capacitance	<5.6 nF per 328 ft. (100m) at 1 kHz
Capacitance Unbalance	<330 pF per 328 ft. (100m) at 1 kHz
Characteristic Impedance	100 Ohm +/-15% up to 100 MHz
Nominal Velocity of Propagation (NVP)	70% for CMP; 65% all others
Operating Voltage, Maximum	80V

cable construction

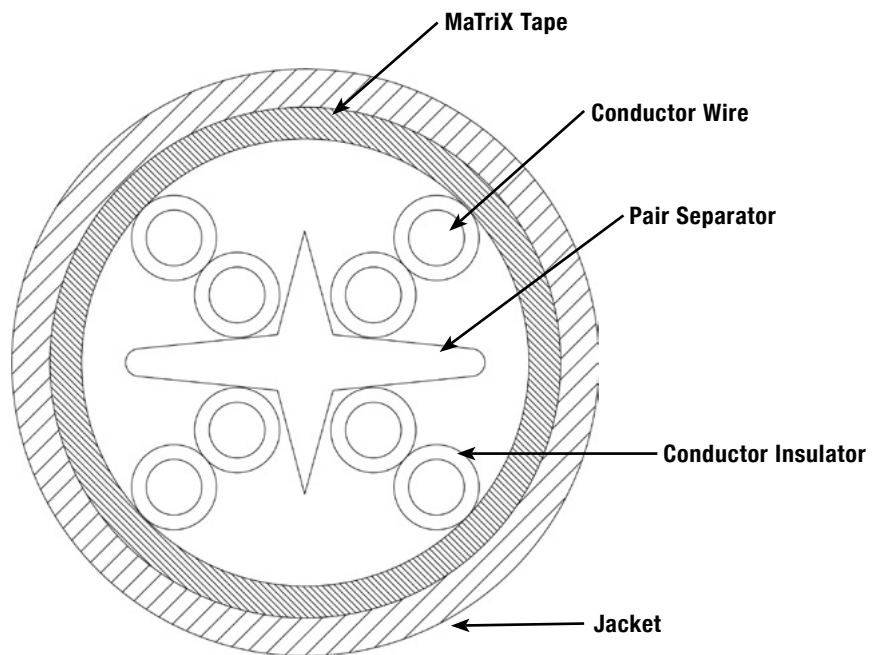

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2023 Panduit Corp.
ALL RIGHTS RESERVED.
COSP419--WW-ENG
5/2023