
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

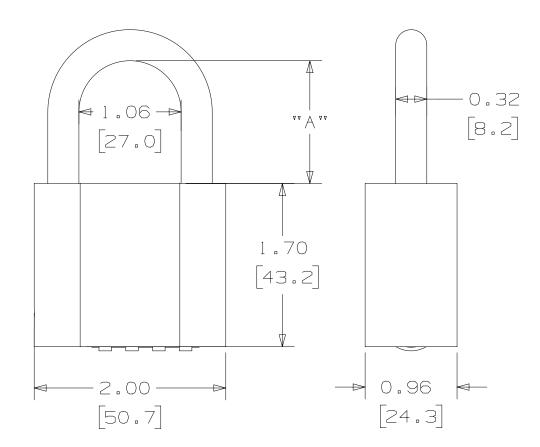

NOTES:

- 1) DIMENSIONS IN [] ARE MILLIMETERS
- 2) 5 PIN CYLINDER
- 3) SHORT SHACKLE IS STANDARD ADD "-LS" FOR LONG SHACKLE

	DIM VV A VV
PSL-18	1.00 [25.4]
PSL - 18 - LS	2.49 [63.2]

							PSL-18 Series All Weather Combination Padlocks			
							CUSTOMER DRAWING			
							ITEM REVISION NAME 00220NCU/00 DATASET FILE NAME	PANDUIT		
							00220NCU_C11723 /00A	- 7- CUII		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	MATERIAL:		
							.x : .25 [6.35] .xxx : .05 [1.27] .xx : .15 [3.81] ANGLES : 5 °	Brass & Steel		
00	02/08/2018	AUMA	DJW	JHAC	Initial Release	GAECN05191	THIRD ANGLE PROJECTION	DRAWING NUMBER:		
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	AUMA 1/30/18 CHK SCALE JHAC 1:1	SHT 1 0F 1		