THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES: 1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT AND INSTRUCTION

- SHEET (VOOO28CA). 2. DIMENSIONS IN PARENTHESES ARE METRIC [mm].
- 3. CAN BE USED WITH ANY 19" CEA STANDARD PANEL.
- 4. PARTS SUPPLIED:


В

- 26RU DUAL HINGE NEMA 4/12 ENCLOSURE
- KEYLOCKING WING KNOBS ARE INCLUDED PROVIDING ACCESS CONTROL TO THE ENCLOSURE.

 (2) KEYS ARE INCLUDED WITH EACH ENCLOSURE.

 ACCOMODATIONS FOR AN OPTIONAL AIR CONDITIONER.
- RAL 7035 LIGHT-GRAY, LOW GLOSS, LIGHTLY TEXTURED POLYESTER POWDER COAT
- INSTALLED FRONT AND REAR CAGE NUT RAILS
- IN OPTIMIZED POSITIONS FOR EQUIPMENT MOUNTING.
- INSTALLED POWER RECEPTACLE
- INSTALLED FIBER ENCLOSURE (72 FIBER CAPACITY)
- INSTALLED (2)48-PORT PATCH PANELS
- INSTALLED CABLE MANAGEMENT
- INSTALLED DOOR GROUND WHIPS, EQUIPMENT GROUND WHIPS (ONE END)
- INSTALLED GROUND BAR
- INFRASTRUCTURE GROUND CABLE
- POWER CORDS, LABELED AND LENGTH OPTIMIZED
- 10" LONG DIN RAIL MOUNTING PROVISION
- CABLE/FIBER/POWER PENETRATION
- RECOMMENDATION TEMPLATE
- INSTRUCTIONS FOR CABLE ROUTING AND MANAGEMENT
- 5. CENTER HINGED SECTION MAXIMUM LOAD RATING: 350 LBS [158.8 kg].

SHIPPING LENGTH	57 "
SHIPPING WIDTH	39"
SHIPPING HEIGHT	35-1/4"
SHIPPING WEIGHT	270 lbs. 122.5 kg.
ENCLOSURE WEIGHT	218 lbs. 98.9 kg.

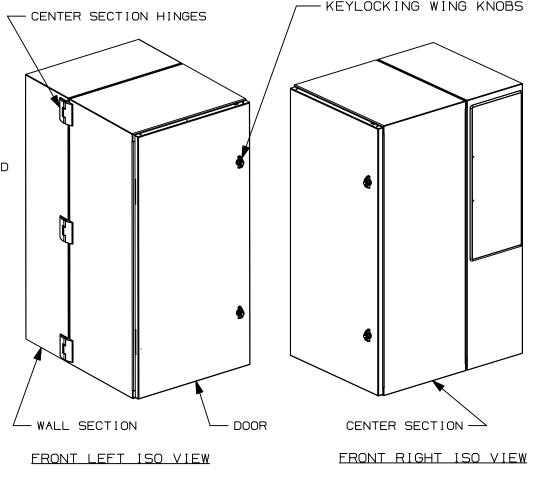

ZDF48-RA PRECONFIGURED 48" INDUSTRIAL DISTRIBUTION FRAME

CUSTOMER DRAWING

В

						13V397AD_DC_03D	PARIUUII	
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	TEC
							.x ± .1 [2.54] .xxx ± .015 [0.38] SEE N(JIE8
03D	4/21/20	JB0	DAJP	KGA	RELEASED TO PRODUCTION	13V397AD	THIRD ANGLE PROJECTION 13V397	AD_DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DATE CHK SCALE DAJP 05/05/2014 NWW NONE SHT 1 OF 4	4 A

TITLE

ITEM REVISION NAME

13V397AD/03

