
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- 1. DIAMETER DIMENSION SHOWN FOR REFERENCE ONLY.
- 2. PLENUM-RATED CABLES MEET THE REQUIREMENTS OF NFPA 262.
 RISER-RATED CABLES MEET THE REQUIRMENTS OF UL 1666.
- 3. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF ROHS (EUROPEAN DIRECTIVE 2011/65/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITEE.

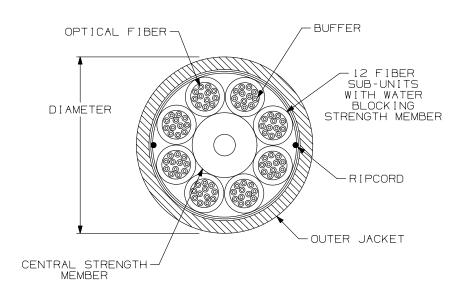

В

PLENUM								
TENSIL	E LOA	D	BEND RADIUS					
INSTALLATION	LC	NG TERM	INSTALLATIO	LONG TERM				
600 lbs (2670 N)		80 lbs 800 N)	16.8 in (42.7 cm)	8.4 in (21.4 cm)				
CABLE DIAMET	ER	TEMPERATURE						
(REFERENCE ON	LY)	STORAGE	/OPERATION	INSTALLATION				
0.84" [21.3 m	nm]		TO +176°F TO +80°C]	32°F TO +140°F [0°C TO +60°C]				
RISER RATED								
TENSIL	E LOA	D	BEND RADIUS					
INSTALLATION	LC	NG TERM	INSTALLATIO	N LONG TERM				
		80 lbs 800 N)	19 in (48.4 cm)	9.5 in (24.2 cm)				
CABLE DIAMET	ER	TEMPERATURE						
(REFERENCE ON	LY)	STORAGE	/OPERATION	INSTALLATION				
0.95" [24.2 m	nm]	-40° F TO +176° F						

L													
A												DUTDOOR CABLE ERED FIBERS	
										Cl	JSTOMER DRA	WING	
									M0205	5JB/00)	PANDUIT	
								DATASET F	MO2055JE	B_DC/0	AOO		
								DIMEN	JNLESS OTHERW ISIONAL TOLER	ISE SPE ANCES A	CIFIED, RE: IN [mm]	PART NO.	
									.03 [0.8]	.XXX ±	.010 [0.3]	SEE TABLE	
	00	02-04-14	SAT	WMA	тсв	RELEASED TO PRODUCTION	M02055JB-DC	$\frac{1}{2}$		TH! PR	RD ANGLE OJECTION	DRAWING NUMBER: MO2055JB-DC	
	REV	DATE	BY	СНК	APR	DESCRIPTION	ECN	DRAWN BY	02-04-14	снк WMA	scale NONE	SHT 1 OF 2 /	TZE A
	2					•	'		1				

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FLAME CABLE PART NO. DESCRIPTION RATING ATTENUATION FSLP596 OFNP MULTIMODE 50/125 OM2 3.5dB/km @ 850nm INDOOR/OUTDOOR CABLE 1.5dB/km @ 1300nm FSLR596 OFNR FSLP696 OFNP MULTIMODE 62.5/125 OM1 3.5dB/km @ 850nm INDOOR/OUTDOOR CABLE 1.5dB/km @ 1300nm FSLR696 OFNR FOLPX96 MULTIMODE 50/125 OM3 INDOOR/OUTDOOR CABLE OFNP 3.5dB/km @ 850nm 1.5dB/km @ 1300nm OFNR FOLRX96 FOLPZ96 OFNP MULTIMODE 50/125 OM4 3.5dB/km @ 850nm INDOOR/OUTDOOR CABLE 1.5dB/km @ 1300nm FOLRZ96 OFNR FSLP996 OFNP SINGLEMODE 9/125 0.7dB/km @ 1310nm INDOOR/OUTDOOR CABLE 0.7dB/km @ 1550nm

OFNR

FSLR996

							TITLE
							96 FIBER INDOOR/OUTDOOR CABLE WITH 900um BUFFERED FIBERS
							CUSTOMER DRAWING
							ITEM REVISION NAME M02055JB/00
							M02055JB/00 DATASET FILE NAME PARIDUIT
							MO2055JB_DC/OOA
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
							.xx. SEE TABLE
							.XX ± .03 [0.8] ANGLES ± DRAWING NUMBER:
00	02-04-14	SAT	WMA	тсв	RELEASED TO PRODUCTION	M02055JB-DC	
RE	V DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DATE CHK SCALE SAT 02-04-14 WMA NONE SHT 2 OF 2
							A

 B