




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

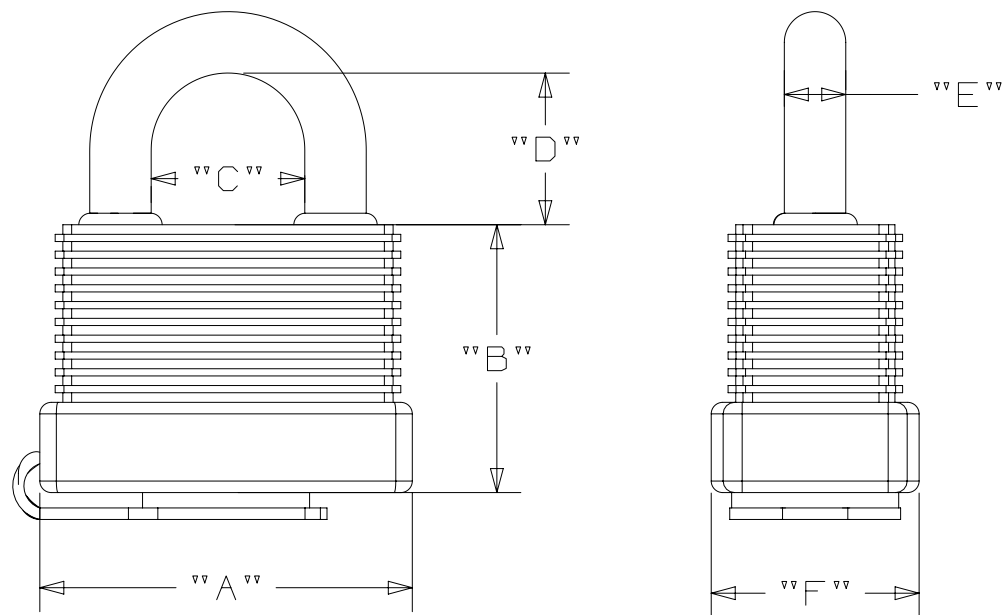

NOTES:

- 1) DIMENSIONS IN [ ] ARE MILLIMETERS
- 2) 5 PIN CYLINDER
- 3) SHORT SHACKLE IS STANDARD  
ADD "-LS" FOR LONG SHACKLE

	DIM $^{''A''}$	DIM $^{''B''}$	DIM $^{''C''}$	DIM $^{''D''}$	DIM $^{''E''}$	DIM $^{''F''}$
PSL - 15ABU	1.94 [ 49.3 ]	1.40 [ 35.4 ]	0.80 [ 20.3 ]	0.56 [ 14.2 ]	0.32 [ 8.1 ]	1.08 [ 27.5 ]
PSL - 15ABU-LS	1.94 [ 49.3 ]	1.40 [ 35.4 ]	0.80 [ 20.3 ]	2.5 [ 63.5 ]	0.32 [ 8.1 ]	1.08 [ 27.5 ]
PSL - 15BBU	1.94 [ 49.3 ]	1.55 [ 39.3 ]	0.77 [ 19.4 ]	1.07 [ 25.4 ]	0.35 [ 9.0 ]	1.22 [ 30.9 ]

							TITLE  PSL-15 Series Weatherproof Padlocks				
							CUSTOMER DRAWING				
							ITEM REVISION NAME 00220NCW/00				
							DATASET FILE NAME 00220NCW_C11717/00A				
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]  .X ± .25 [ 6.35 ]      .XXX ± .05 [ 1.27 ] .XX ± .15 [ 3.81 ]      ANGLES ± 5 °   THIRD ANGLE PROJECTION				
00	02/08/2018	AUMA	DJW	JHAC	Initial Release	GAECN05193				MATERIAL:  Brass, Steel, & Plastic	
										DRAWING NUMBER:  C11717	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY AUMA	DATE 1/30/18	CHK JHAC	SCALE 1 : 1	SIZE A