



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

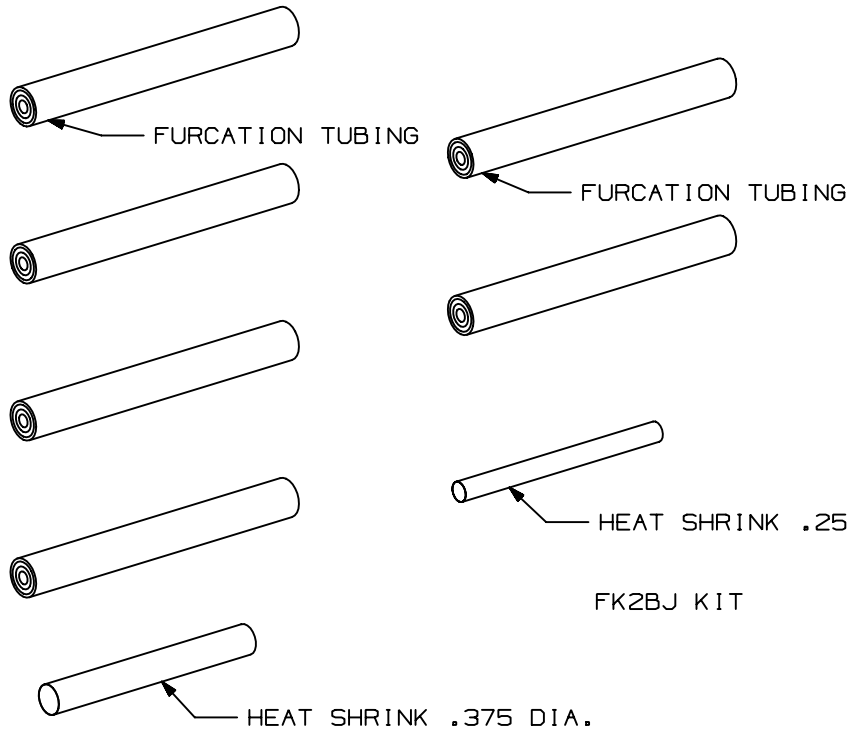


PANDUIT P/N	WEIGHT
FK2BJ	.34 LB/10 PCS. (157 g/10 PCS.)
FK4BJ	.68 LB/10 PCS. (310 g/10 PCS.)

- NOTES:
- SEE CURRENT CATALOG TO INDICATE COLOR AND OR PACKAGE QUANTITY.
 - FURCATION KIT FOR BREAKOUT OF 2 AND 4 900 UM BUFFERED FIBERS.
 - DIMENSIONS IN PARENTHESES ARE IN METRIC.
 - HEAT SHRINK RATIO IS 3:1.
 - INCLUDED IN FK2BJ KIT IS THE FOLLOWING:
 - (2) - 1M LENGTH FURCATION TUBING
 - (1) - 3" PIECE OF HEAT SHRINK TUBING, .250 DIA.
 - INCLUDED IN FK4BJ KIT IS THE FOLLOWING:
 - (4) - 1M LENGTH FURCATION TUBING
 - (1) - 3" PIECE OF HEAT SHRINK TUBING, .375 DIA.

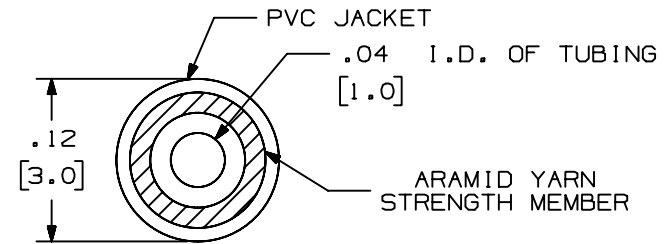

CROSS SECTION OF FURCATION TUBING

FURCATION TUBING KIT										
CUSTOMER DRAWING										
										 <p>PANDUITTM CORP. TINLEY PARK, ILL 60477</p>
										ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED.
										DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) ± .010 (0.3) (.XX) ± .03 (0.8) ANGLES
										SCALE NONE
										PART NO. FK2BJ/FK4BJ
										DRAWING NO. 00530-04
										SIZE A
1	04-19-05	MYW		RELEASED TO PRODUCTION	00530-04					DATE 04-27-99
REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH	CHK'D	KRKE