

PANDUIT®

infrastructure for a connected world



Trade Agreements Act (TAA) Compliant

BEST SELLERS & FEATURED CATALOG



Welcome to our TAA Compliant Catalog for Cutting-Edge Infrastructure Solutions for US Federal Government IT Services



As a trusted industry partner, our commitment extends beyond delivering exceptional products to encompass compliance with crucial regulatory frameworks. This catalog serves as your gateway to our best sellers & featured products found on [Panduit.com](https://panduit.com), that will comply with the Trade Agreements Act (TAA), between our Network Infrastructure & Electrical solutions. This comprehensive suite of solutions is designed to elevate the efficiency, security, and performance of your Federal Government IT infrastructure project while ensuring compliance with TAA.

Within the pages of this catalog, you will discover a diverse range of solutions to optimize your federal IT infrastructure. From high-performance cabling and connectivity solutions to advanced data center management and security and offerings engineered for all aspects of designing, installing, and maintaining infrastructures within heavy-duty industrial environments. Panduit empowers federal agencies to achieve their mission-critical objectives with confidence.

Panduit is a USA-based manufacturer operating multiple manufacturing locations in the USA and TAA-designated countries. We understand the significance of sourcing compliant products to US government end users and Panduit partners. In addition, Panduit products are commercial-off-the-shelf (COTS) items, meant for general consumption.

We invite you to explore the possibilities Panduit offers and discover Infrastructure Solutions that can elevate the efficiency, security, and performance of your Government IT project while ensuring seamless compliance with TAA requirements.

Experience the future of federal IT infrastructure with Panduit.

What is the Trade Agreements Act of 1979?

The Trade Agreements Act of 1979, often referred to as TAA, was enacted to help promote international trade agreements that the United States holds with other countries by putting a procurement preference on goods that are considered TAA compliant.

What is a “TAA-compliant” product?

In order for a product to be considered TAA compliant it must meet the following:

- Be fully manufactured in the United States or a TAA-designated country
- Be substantially transformed in the United States or a TAA-designated country

Which countries are considered TAA-designated?

Countries found within the following...

- A World Trade Organization Government Procurement Agreement (WTO GPA) country
- A Free Trade Agreement (FTA) country
- A least developed country
- U.S. Caribbean Basin Initiative (CBI) to “A Caribbean Basin Country”

Contact Us Today!

For confirmation regarding TAA-compliant products not listed in this catalog and other inquiries, please contact our customer experience team at CX@Panduit.com.

Contact Panduit Federal Support at FedGov@panduit.com

Interested in learning more about Panduit US Federal Government solutions?

Visit [Federal Government IT Infrastructure - Panduit](#).

Panduit Disclaimer Statement

If your project is subject to the Trade Agreement Act (TAA) of 1979 requirements, products included in this catalog will be compliant. Panduit provides a TAA designation for products that have a country of origin (COO) of the United States and/or “designated countries” set forth in F.A.R. 52.225-5.

Please note, that the accuracy of statements made in this catalog is contingent upon Panduit products being purchased and shipped to the United States.

Please note that there may be additional or different government-imposed restrictions than the Trade Agreements Act of 1979 pertaining to the project for which you are providing the product. Be sure to consult the applicable project terms to ensure you are supplying compliant products. This catalog does not provide legal advice and the buyer is responsible for its compliance with applicable laws and regulations.

Catalog last updated: December 1 2024

Table of Contents

 Copper Cabling Systems.....	5
 Fiber Optics Systems.....	20
 Industrial Networks	34
 Audio Video Systems	37
 NetKey Cabling Systems.....	46
 Racks and Cabinet Systems	49
 Power Management	54
 Cable Routing Systems.....	56
 Cable Management Accessories.....	64
 Abrasion Protection	66
 Cable Cleats.....	74
 Cable Ties	77
 Cable Accessories.....	93
 Identification.....	108
 Power Connectors	122
 Grounding Connections	130
 Safety Solutions.....	137
 Terminals	143
 Wiring Ducts	153
 Stronghold Contractor Products	158

COPPER CABLING SYSTEMS

Copper Cable	6
Copper Patch Cords	8
Copper Jacks Modules	14
Copper Coupler Modules	15
Modular Plugs	16
RJ45 Lock-in and Blockout Devices	17
Patch Panels	17
Faceplates and Surface Mount Boxes	18
QuickNet™ Copper Cable Assembly Components	19

Copper Cable

TX6A™ Category 6A Unshielded Copper Cable

				Nominal Cable Diameter in. (mm)			
Part Number	Flame Rating	Performance Level	Cable Construction		LP Rating	Packaging	Color
PUP6AHD04BU-G	Plenum (CMP, FT-6)	Category 6A Premium	U/UTP Vari-MaTriX AXT Barrier	0.230 (5.8)	CMP-LP (0.7A)	Reel	Blue
PUP6AHD04WH-G							White
PUP6XHD04BU-G		Category 6A Standard Compliant Plus	U/UTP Continuous AXT Barrier				Blue
PUP6XHD04WH-G							White
PUR6AS04BU-GZ	Riser (CMR, FT-4)		U/UTP Discontinuous AXT Barrier	0.265 (6.7)	CMR-LP (0.5A)		Blue
PUR6AS04WH-GZ							White




PUP6AHD04BU-G



PUP6XHD04WH-G

TX6000™ Enhanced Category 6 Unshielded Copper Cable

Part Number	Flame Rating	Performance Level	Cable Construction	Nominal Cable Diameter in. (mm)	LP Rating	Packaging	Color
PUP6004BU-WLPZ	Plenum (CMP, FT-6)	Category 6 Enhanced	U/UTP	0.225 (5.7)	CMP-LP (0.5A)	1000 ft. Easy Payout Carton	Blue
PUP6004WH-WLPZ							White
PUP6004BU-ULPZ						1000 ft. Reel in box	Blue
PUP6004WH-ULPZ							White
PUP6004BU-WZ				0.236 (6.0)	No LP Listing	1000 ft. Easy Payout Carton	Blue
PUP6004WH-WZ							White
PUR6004BU-WZ	Riser (CMR, FT-4)		Blue				
PUR6004WH-WZ			White				



PUP6004WH-WLPZ



PUP6004BU-ULPZ

TX6000™ Enhanced Category 6 Unshielded Copper Cable

Part Number	Flame Rating	Performance Level	Cable Construction	Nominal Cable Diameter in. (mm)	LP Rating	Packaging	Color
PUP6C04BU-WLPZ	Plenum (CMP, FT-6)	Category 6 Standard Compliant Plus	U/UTP	0.205 (5.2)	CMP-LP (0.5A)	1000 ft. Easy Payout Carton	Blue
PUP6C04WH-WLPZ							White
PUP6C04BU-WZ		Category 6 Standard Compliant		0.230 (5.8)	No LP Listing		Blue
PUP6C04WH-WZ							White
PUP6C2204BU-WZ		Category 6 Standard Compliant, Extended Reach		0.243 (6.2)	CMP-LP (0.7A)		Blue
PUP6C2204WH-WZ							White
PUR6C04BU-WZ	Riser (CMR, FT-4)	Category 6 Standard Compliant		0.220 (5.6)	No LP Listing		Blue
PUR6C04WH-WZ							White



PUP6C04WH-WLPZ



PUP6C2204BU-WZ


Copper Cable, continued

TX6A™ Category 6A Shielded Copper Cable

				Nominal Cable Diameter in. (mm)	LP Rating		
Part Number	Flame Rating	Performance Level	Cable Construction			Packaging	Color
PUFP6X04BU-UG	Plenum (CMP, FT-6)	Category 6A Standard Compliant	U/FTP	0.295 (7.5)	CMP-LP (0.8A)	1000 ft. Reel	Blue
PUFP6X04WH-UG							White
PFP6X04BU-UGZ			F/UTP	0.273 (6.9)	No LP Listing		Blue
PFP6X04WH-UGZ							White
PUFR6X04BU-UG	Riser (CMR, FT-4)		U/FTP	0.308 (7.8)	CMR-LP (0.5A)		Blue
PUFR6X04WH-UG							White
PFR6X04BU-CGZ			F/UTP	0.288 (7.3)	No LP Listing		Blue
PFR6X04WH-CGZ							White
PFP6C04BU-UGZ	0.273 (6.9)			Blue			
PFP6C04WH-UGZ				White			
PFR6C04BU-UGZ	0.288 (7.3)			Blue			
PFR6C04WH-UGZ				White			



PUFP6X04BU-UG



PFP6X04BU-UGZ

TX6A™ Category 6A OSP Copper Cable

Part Number	Flame Rating	Performance Level	Cable Construction	Nominal Cable Diameter in. (mm)	LP Rating	Packaging	Color
PFO6X04BL-CGZ	Outdoor (OSP)	Category 6A Standard Compliant	F/UTP	0.330 (8.4)	No LP Listing	1000 ft. Reel	Black

TX6A™ Category 6A Indoor/Outdoor Copper Cable

Part Number	Flame Rating	Performance Level	Cable Construction	Nominal Cable Diameter in. (mm)	LP Rating	Packaging	Color
PUO6AS04BL-G	Indoor (Plenum)/ Outdoor (OSP)	Category 6A Standard Compliant	U/UTP	0.260 (6.6)	CMP-LP (0.8A)	1000 ft. Reel	Black



PUO6AS04BL-G

TX6™ Category 6 OSP Copper Cable

Part Number	Flame Rating	Performance Level	Cable Construction	Nominal Cable Diameter in. (mm)	LP Rating	Packaging	Color
PUO6C04BL-CGZ	Outdoor (OSP)	Category 6 Standard Compliant	U/UTP	0.240 (6.1)	No LP Listing	1000 ft. Reel	Black

Copper Patch Cords




UTP28X7BU

Unshielded Category 6A 28 AWG Performance Patch Cords

Part number	Performance Level	Cable Type	AWG	Nominal Cable Diameter in. (mm)	Flammability Rating	Length ft. - unless listed	Color
UTP28X8IN	Category 6A	Unshielded	28	0.19 (4.7)	CM/LSZH	8 in.	Off White
UTP28X1						1	
UTP28X3						3	
UTP28X5						5	
UTP28X7						7	
UTP28X10						10	
UTP28X15						15	
UTP28X8INBU						8 in.	Blue
UTP28X1BU						1	
UTP28X3BU						3	
UTP28X5BU						5	
UTP28X7BU						7	
UTP28X10BU						10	
UTP28X15BU						15	
UTP28X8INBL						8 in.	Black
UTP28X1BL						1	
UTP28X3BL						3	
UTP28X5BL						5	
UTP28X7BL						7	
UTP28X10BL						10	
UTP28X15BL						15	
UTP28X8INRD						8 in.	Red
UTP28X1RD						1	
UTP28X3RD						3	
UTP28X5RD						5	
UTP28X7RD						7	
UTP28X10RD						10	
UTP28X15RD						15	
UTP28X8INYL						8 in.	Yellow
UTP28X1YL						1	
UTP28X3YL						3	
UTP28X5YL						5	
UTP28X7YL						7	
UTP28X10YL						10	
UTP28X15YL						15	
UTP28X8INGR						8 in.	Green
UTP28X1GR						1	
UTP28X3GR						3	
UTP28X5GR						5	
UTP28X7GR						7	
UTP28X10GR						10	
UTP28X15GR						15	

Copper Patch Cords, continued




UTP28SP7BU

Unshielded Category 6 28 AWG Performance Patch Cords

Part number	Performance Level	Cable Type	AWG	Nominal Cable Diameter in. (mm)	Flammability Rating	Length ft. – unless listed	Color
UTP28SP8IN	Category 6	Unshielded	28	0.15 (3.8)	CM/LSZH	8 in.	Off White
UTP28SP1						1	
UTP28SP3						3	
UTP28SP5						5	
UTP28SP7						7	
UTP28SP10						10	
UTP28SP15						15	
UTP28SP8INBU						8 in.	Blue
UTP28SP1BU						1	
UTP28SP3BU						3	
UTP28SP5BU						5	
UTP28SP7BU						7	
UTP28SP10BU						10	
UTP28SP15BU						15	
UTP28SP8INBL						8 in.	Black
UTP28SP1BL						1	
UTP28SP3BL						3	
UTP28SP5BL						5	
UTP28SP7BL						7	
UTP28SP10BL						10	
UTP28SP15BL						15	
UTP28SP8INRD						8 in.	Red
UTP28SP1RD						1	
UTP28SP3RD						3	
UTP28SP5RD						5	
UTP28SP7RD						7	
UTP28SP10RD						10	
UTP28SP15RD						15	
UTP28SP8INYL						8 in.	Yellow
UTP28SP1YL						1	
UTP28SP3YL						3	
UTP28SP5YL						5	
UTP28SP7YL						7	
UTP28SP10YL						10	
UTP28SP15YL						15	
UTP28SP8INGR						8 in.	Green
UTP28SP1GR						1	
UTP28SP3GR						3	
UTP28SP5GR						5	
UTP28SP7GR						7	
UTP28SP10GR						10	
UTP28SP15GR						15	

Copper Patch Cords, continued




UTP6AX7BU

Unshielded Category 6A 24 AWG Patch Cords

Part number	Performance Level	Cable Type	AWG	Nominal Cable Diameter in. (mm)	Flammability Rating	Length ft.	Color
UTP6AX1	Category 6A	Unshielded	24	0.25 (6.4)	CM	1	Off White
UTP6AX2						2	
UTP6AX3						3	
UTP6AX5						5	
UTP6AX7						7	
UTP6AX10						10	
UTP6AX15						15	Blue
UTP6AX1BU						1	
UTP6AX2BU						2	
UTP6AX3BU						3	
UTP6AX5BU						5	
UTP6AX7BU						7	
UTP6AX10BU						10	Black
UTP6AX15BU						15	
UTP6AX1BL						1	
UTP6AX3BL						3	
UTP6AX5BL						5	
UTP6AX7BL						7	
UTP6AX10BL						10	Red
UTP6AX15BL						15	
UTP6AX1RD						1	
UTP6AX3RD						3	
UTP6AX5RD						5	
UTP6AX7RD						7	
UTP6AX10RD						10	Yellow
UTP6AX15RD						15	
UTP6AX1YL						1	
UTP6AX3YL						3	
UTP6AX5YL						5	
UTP6AX7YL						7	
UTP6AX10YL						10	Green
UTP6AX15YL						15	
UTP6AX1GR						1	
UTP6AX3GR						3	
UTP6AX5GR						5	
UTP6AX7GR						7	
UTP6AX10GR						10	Green
UTP6AX15GR						15	

Copper Patch Cords, continued



UTPSP7BUY

Unshielded Category 6 24 AWG PLUS Patch Cords

Part number	Performance Level	Cable Type	AWG	Nominal Cable Diameter in. (mm)	Flammability Rating	Length ft.	Color
UTPSP1Y	Category 6	Unshielded	24	0.24 (6.0)	CM	1	Off White
UTPSP3Y						3	
UTPSP5Y						5	
UTPSP7Y						7	
UTPSP10Y						10	
UTPSP15Y						15	
UTPSP1BUY						1	Blue
UTPSP3BUY						3	
UTPSP5BUY						5	
UTPSP7BUY						7	
UTPSP10BUY						10	
UTPSP15BUY						15	
UTPSP1BLY						1	Black
UTPSP3BLY						3	
UTPSP5BLY						5	
UTPSP7BLY						7	
UTPSP10BLY						10	
UTPSP15BLY						15	
UTPSP1RDY						1	Red
UTPSP3RDY						3	
UTPSP5RDY						5	
UTPSP7RDY						7	
UTPSP10RDY						10	
UTPSP15RDY						15	
UTPSP1YLY						1	Yellow
UTPSP3YLY						3	
UTPSP5YLY						5	
UTPSP7YLY						7	
UTPSP10YLY						10	
UTPSP15YLY						15	
UTPSP1GRY						1	Green
UTPSP3GRY						3	
UTPSP5GRY						5	
UTPSP7GRY						7	
UTPSP10GRY						10	
UTPSP15GRY						15	

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Copper Patch Cords, continued



Shielded Category 6A 28 AWG Patch Cords

Part number	Performance Level	Cable Type	AWG	Nominal Cable Diameter in. (mm)	Flammability Rating	Length m	Color
STP28X0.2MBU	Category 6A	Shielded	28	0.19 (4.7)	CM/LSZH	0.2	Blue
STP28X0.5MBU						0.5	
STP28X1MBU						1	
STP28X1.5MBU						1.5	
STP28X2MBU						2	
STP28X3MBU						3	Black
STP28X5MBU						5	
STP28X0.2MBL						0.2	
STP28X0.5MBL						0.5	
STP28X1MBL						1	
STP28X1.5MBL						1.5	
STP28X2MBL						2	International Gray
STP28X3MBL						3	
STP28X5MBL						5	
STP28X0.2MIG						0.2	
STP28X0.5MIG						0.5	
STP28X1MIG						1	
STP28X1.5MIG						1.5	
STP28X2MIG						2	Green
STP28X3MIG						3	
STP28X5MIG						5	
STP28X0.2MGR						0.2	
STP28X0.5MGR						0.5	
STP28X1MGR						1	
STP28X1.5MGR						1.5	
STP28X2MGR						2	
STP28X3MGR						3	
STP28X5MGR						5	

Copper Patch Cords, continued



STP6X2MBU

Shielded Category 6A 26 AWG Patch Cords

Part number	Performance Level	Cable Type	AWG	Nominal Cable Diameter in. (mm)	Flammability Rating	Length m	Color
STP6X0.2MBU	Category 6A	Shielded	26	0.25 (6.3)	CM/LSZH	0.2	Blue
STP6X0.5MBU						0.5	
STP6X1MBU						1	
STP6X1.5MBU						1.5	
STP6X2MBU						2	
STP6X3MBU						3	
STP6X5MBU						5	
STP6X0.2MBL						0.2	Black
STP6X0.5MBL						0.5	
STP6X1MBL						1	
STP6X1.5MBL						1.5	
STP6X2MBL						2	
STP6X3MBL						3	
STP6X5MBL						5	
STP6X0.2MIG						0.2	International Gray
STP6X0.5MIG						0.5	
STP6X1MIG						1	
STP6X1.5MIG						1.5	
STP6X2MIG						2	
STP6X3MIG						3	
STP6X5MIG						5	
STP6X0.2MGR						0.2	Green
STP6X0.5MGR						0.5	
STP6X1MGR						1	
STP6X1.5MGR						1.5	
STP6X2MGR						2	
STP6X3MGR						3	
STP6X5MGR						5	



FPS6X88TC

TX6A™ Shielded Field Term Plug Test Cord

Part Number	Type	AWG	Nominal Cable Diameter in. (mm)	Flammability Rating	Length ft.	Color
FPS6X88TC	Shielded	26	0.24 (6.09)	CM	3.28	Red

Copper Jacks Modules



CJ6X88TGBU



CJ688TGBU


Mini-Com® TX6A™ and TX6™ PLUS Jack Modules

Part Number	Type	Performance Level	Termination Style	Color	Bulk Pack
CJ6X88TGBL	Unshielded Standard	Category 6A	TG-Style	Black	—
CJ6X88TGBU				Blue	
CJ6X88TGWH				White	
CJ6X88TGRD				Red	
CJ6X88TGOR				Orange	
CJ6X88TGYL				Yellow	
CJ6X88TGGR				Green	
CJ6X88TGIG				International Gray	
CJ6X88TGEI				Electric Ivory	
CJ6X88TGIW				Off White	
CJ6X88TGVL				Violet	
CJ6X88TGBL-24				Black	
CJ6X88TGBU-24				Blue	
CJ6X88TGWH-24				White	
CJ6X88TGRD-24				Red	
CJ6X88TGOR-24				Orange	
CJ6X88TGYL-24				Yellow	
CJ6X88TGGR-24				Green	
CJ6X88TGIG-24				International Gray	
CJ6X88TGEI-24				Electric Ivory	
CJ6X88TGIW-24				Off White	
CJ6X88TGVL-24				Violet	
CJ6X88TGBL-C				Black	100
CJ6X88TGBU-C				Blue	
CJ6X88TGWH-C		White			
CJ688TGBU		Category 6		Blue	—
CJ688TGBL				Black	
CJ688TGWH				White	
CJ688TGRD				Red	
CJ688TGOR				Orange	
CJ688TGYL	Yellow				
CJ688TGGR	Green				
CJ688TGIG	International Gray				
CJ688TGEI	Electric Ivory				
CJ688TGVL	Violet				

Copper Jacks Modules, continued

Mini-Com® TX6A™ and TX6™ PLUS Jack Modules


Part Number	Type	Performance Level	Termination Style	Color	Bulk Pack
CJ688TGBU-24	Unshielded Standard	Category 6	TG-Style	Blue	24
CJ688TGBL-24				Black	
CJ688TGWH-24				White	
CJ688TGRD-24				Red	
CJ688TGOR-24				Orange	
CJ688TGYL-24				Yellow	
CJ688TGGR-24				Green	
CJ688TGIG-24				International Gray	
CJ688TGEI-24				Electric Ivory	
CJ688TGIW-24				Off White	
CJ688TGVL-24				Violet	
CJS6X88TGY	Standard Shielded	Category 6A	TG-Style	Black	—
CJS6X88TGY-24		Category 6			100
CJS688TGY					
CJS688TGY-24					
CJ688TGBL-C					
CJ688TGBU-C	Unshielded Standard	Category 6	TG-Style	Blue	100
CJ688TGWH-C	Standard Shielded			White	
CJ688TGIW	Unshielded Standard			Off White	
CJE6X88TGBU	Unshielded Corrosion Resistant	Category 6A	TG-Style	Blue	—
CJE6X88TGIW				White	



CJE6X88TGBU

Mini-Com® TX6A™ and TX6™ PLUS Shielded Wire Caps

Part Number	Type	Performance Level	Termination Style	Color
CJSLRCAPBU-X	Shielded Cable Entry Left/Right+	Category 6A	TG-Style	Jack Modules
CJSLRCAPIW-X		Category 6		
CJSUDCAPBU-X	Shielded Cable Entry Up/Down+	Category 6A		
CJSUDCAPIW-X		Category 6		



CJSLRCAPBU-X



CJSUDCAPBU-X

Copper Coupler Modules

Mini-Com® TX6A™ and TX6™ PLUS Unshielded and Shielded Coupler Modules

Part Number	Type	Performance Level	Termination Style	Color
CC688BL	Unshielded	Category 6A	RJ45	Black
CC6X88BL		Category 6		



CC688BL



CC6X88BL

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Copper Jacks Modules, continued

Mini-Com® USB Coupler Modules

Part Number	Description	Color
CMUSBAABL	USB Type 'A' blockout device	Black
CMUSBAAIW		Off White
CMUSBAAWH		White



CMUSBAAIW

TX6A™ FieldCord™ Connectors

Part number	Performance Level	Plug Type	Length m	Color
FC-ICC/P3MBU	Category 6A	Indoor Unshielded Connector Cord with Loose Splice Connector	3	Blue
FC-ICC/P3MWH				White
FC-ICCP0.5MBU		Indoor Unshielded Connector Cord	0.5	Blue
FC-ICCP0.5MWH				White
FC-ICCP1MBU			1	Blue
FC-ICCP1MWH				White
FC-ISC		Splice Unshielded/Indoor Splice Connector	—	Black



FC-ICCP0.5MBU

Modular Plugs

TX6A™ Unshielded and Shielded Field Term Plugs

Part Number	Type	Performance Level	Termination Style	Color
FP6X88MTG	Unshielded Straight	Category 6A	TG-Style	Black
FPS6X88MTG	Shielded Straight			Silver
FP6X88MTG-X	Unshielded Straight			Black
FPUD6X88MTG	Unshielded 45° Angled			



FP6X88MTG



FPUD6X88MTG

Single Pair Ethernet Plug

Part Number	Description	Wire Gauge (AWG)	Color
SP-1LSA22BL	Shielded Single Pair Ethernet 2 Wire, 2 Position Plug	18	Black



SP-1LSA22BL

Mini-Com® Blank Modules

Part Number	Description	Color
CMBBL-X	Reserves a one module space for future use in Mini-Com Patch Panels, Faceplates, and Surface Mount Boxes	Black
CMBWH-X		White



CMBWH-X

RJ45 Lock-in and Blockout Devices

SmartKeeper Security Devices

Part Number	Type	Color
SKMKEY	Master Key	Gray
SKUSBA-V	USB Type A Block-Out Device	Red
SKRJ45RD-X	RJ45 Block-Out Device, 10/pkg	
SKUSBC	USB Type C Block-Out Device	




SKMKEY

SKUSBA-V



SKRJ45RD-X

SKUSBC

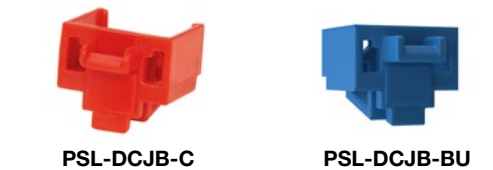

PSL-DCJB-C

PSL-DCJB-BU

RJ45 Jack Blockout Device

Part Number	Type	Number of Keys	Color
PSL-DCJB-BL	Standard	1	Black
PSL-DCJB-BU			Blue
PSL-DCJB			Red
PSL-DCJB-C	Standard, 100/pkg	5	

RJ45 Lock-In Devices

Part Number	Type	Number of Keys	Color*
PSL-DCPLE	Standard	1	Red
PSL-DCPLE-C	Standard, 100/Pkg	5	
PSL-DCPLRE	Recessed	1	
PSL-DCPLRE-C	Recessed, 100/Pkg	5	

* Visit www.panduit.com for more color options



PSL-DCPLE

Patch Panels

Mini-Com® Modular Patch Panels

Part Number	Ports	Style	Identification	Design	No. of Rack Units	Color
CPP24FM6BL	24	Flat	Adhesive	Flush Mount	1	Black
CPPA24FM6BL		Angled				
CPP24BLY		Flat	Label Pocket	Ultimate ID		
CPPA24BLY		Angled				
CPP48FMWBLY	48	Flat	Adhesive	Flush Mount	2	
CPPA48FMWBLY		Angled				
CP48HDBL		Flat				
CPA24BLY	24	Angled		Shielded	1	
CPA48BLY	48				2	
CPP48FMWBLY	48	Flat		Flush Mount	1	
CPPA24FMWBLY					24	
CPPA48FMWBLY	48	Angled		All Metal Shielded	2	
CPA48BLY						



CPP24FM6BL



CPP24BLY



CPPA24FMWBLY



CPA48BLY

Faceplates and Surface Mount Boxes

Populated UTP Patch Panels

Part Number	Ports	Style	Performance Level	Identification	Termination Type	No. of Rack Units	Color
CP246X88BL	24	Flat	Category 6A	Adhesive	Coupler	1	Black
CP24688BL			Category 6		110		
DP246X88TGY			Category 6A				
DP24688TGY			Category 6				
DP486X88TGY	48	Angled	Category 6A				
DP48688TGY			Category 6				
DPA486X88TGY			Category 6A				
DPA48688TGY			Category 6				




DP486X88TGY



DPA486X88TGY

Patch Panel Accessories

Part Number	Type	Style	Color
SRB19D5BL	Strain Relief Bar	Deep	Black
SRB19MDBL		Multi-Depth	
SRB19D7BL		Deep	

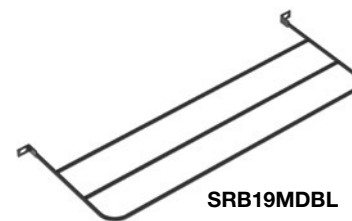

SRB19MDBL

Mini-Com® Single Gang Faceplates

Part Number	Ports*	Style	Identification	Series	Color*
CFPE2WHY	2	Flat	Label Pocket	Executive	White
CFPE4IWY	4				Off White
CFPL2WHY	2			Classic	White
CFPL4IWY	4				Off White
CFPSL2IWY	2	Sloped	Adhesive	Executive - Bulk	White
CFP1IW	1	Flat			
CFPE2WH-X	2				
CFPL2WH-X		Label Pocket	Classic - Bulk		

*Visit panduit.com for full offering



CFPL2WH-X

Mini-Com® Furniture Faceplates

Part Number	Ports	Furniture Opening	Identification	Color
CFFPL4BL	4	Standard	Label Pocket	Black
CFFP4BL			Adhesive	
CFFPHM4BL		Herman Miller*	Costa Rica	

*HERMAN MILLER is a trademark of Herman Miller, Inc., Zeeland, MI



CFFP4BL

Faceplates and Surface Mount Boxes, continued

Mini-Com® Stainless Steel Faceplates

Part Number	Ports	Furniture Opening	Identification	Color
CFPL2SU	2	Standard	Label Pocket	Gray
CFPL4SU	4			
CFPL6SU	6			



CFPL4SU

Phone Plates

Part Number	Description
KWPK6	Includes Category 6 keystone punchdown module

Mini-Com® Surface Mount Boxes

Part Number	Ports	Style	Magnet	Raceway Compatpability	Identification	Color	
CBX1WH-A	1	Elongated	—	LD3/LDPH3	Adhesive	White	
CBX1IW-A						Off White	
CBX2WH-AY	2		CBM-X	LD3/LDPH3, LD5/LDPH5		White	
CBX2IW-AY						Off White	
CBX2EI-AY						Electric Ivory	
CBX4WH-AY	4					Label Pocket	White
CBX4IW-AY							Off White
CBXF6IW-AY	6	Multimedia	—	LD3/LDPH3 L			



CBX2WH-AY

QuickNet™ Copper Cable Assembly Components

Copper Cabling Assemblies

Part Number	Flame Rating	Cable Type	Performance Level	End Type	Length ft.	Color
QZRBCCB0001F010	Riser	UTP Vari-MaTriX Cables	Category 6A	Cassette-to-Cassette	10	Blue
QZPBCCB0001F010	Plenum					



QZRBCCB0001F010

Patch Panels

Part Number	Ports	Unshielded or Shielded	Style	No. of Racks	Color
QPP48HDBL	48	Unshielded	Flat	1	Black
QAPP24BL	24		Angled		
QAPP48HDBL	48				
QPP24BL	24		Flat		
QSP48HDBL	48	Shielded			



QPP48HDBL

Accessories

Part Number	Description
QPPBBL	QuickNet Patch Panel Blank reserves space for future use and promotes proper airflow and cooling
QPPABL	QuickNet Patch Panel Adapter which accepts Mini-Com Modules for UTP, fiber optic, and audio/visual applications




FIBER OPTIC SYSTEMS

Fiber Optic Cable	21
Fiber Optic Connectors.....	22
Fiber Optic Adapters and Modules.....	23
Fiber Optic Cassettes.....	25
Fiber Optic Patch Cord and Pigtail Assemblies.....	31
Fiber Optic Trunk Cable Assemblies	33

Fiber Optic Cable

Opti-Core® Fiber Optic Indoor Distribution Cable


Part Number	Flame Rating	Fiber Type	Fiber Count
FODPW12Y	Plenum	50µm Multimode OM5	12
FODPW24Y			24
FODPX12Y		50µm Multimode OM3	12
FODRX06Y	Riser		6
FODRX12Y			12
FODPZ12Y	Plenum	50µm Multimode OM4	12
FODPZ24Y			24
FODRZ12Y	Riser		12
FODRZ24Y			24
FSDP912Y	Plenum	9µm Singlemode OS2	12
FSDP924Y			24
FSDP948Y			48
FSDR924Y	Riser		24
FSDR912Y			12



FODRX06Y

Opti-Core® Fiber Optic Indoor Interlocking Armor Cable

Part Number	Flame Rating	Fiber Type	Fiber Count
FOPPW06Y	Plenum	50µm Multimode OM5	6
FOPPW12Y			12
FOPPW24Y			24
FOPPX12Y		50µm Multimode OM3	12
FOPPX06Y			6
FOPPZ12Y		50µm Multimode OM4	12
FOPPZ24Y			24
FSPP906Y		9µm Singlemode OS2	6
FSPP912Y			12
FSPP924Y			24
FSPR912Y	Riser		12



FOPPZ12Y

Opti-Core® Fiber Optic Indoor/Outdoor All-Dielectric Cable

Part Number	Flame Rating	Fiber Type	Fiber Count	Construction
FOCPZ12Y	Plenum	50µm Multimode OM4	12	Central Loose Tube
FOCRZ06Y	Riser		6	
FOCRZ12Y			12	
FOCRX06Y		6		
FOCRX12Y		12		
FONPZ24Y	Plenum	50µm Multimode OM4	24	Stranded Loose Tube
FSCP912Y	Riser	9µm Singlemode OS2	12	Central Loose Tube
FSCR906Y			6	
FSCR912Y			12	
FSNP948Y	Plenum		48	Stranded Loose Tube
FSNP924Y			24	



FOCRX12Y

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Fiber Optic Cable, continued

Opti-Core® Fiber Optic Indoor/Outdoor Tight Buffered Cable

Part Number	Flame Rating	Fiber Type	Fiber Count
FOKPX06	Plenum	50µm Multimode OM3	6
FSKP912		9µm Singlemode OS2	12



FOKPX06

Opti-Core® Fiber Optic Armored Outside Plant Cable

Part Number	Flame Rating	Fiber Type	Fiber Count
FSWN912	—	9µm Singlemode OS2	12
FSWN924			24



FSWN912

Opti-Core® Ribbon Fiber Optic Cable

Part Number	Flame Rating	Fiber Type	Fiber Count	Construction
FFDPBF012F	Plenum	9µm Singlemode OS2	12	Indoor Distribution Ribbon
FFDPBF024F			24	
FFDPBF048F			48	
FFDPBF096F			96	
FFDPBF072F			72	
FFDPZF012F		50µm Multitude OM4	12	
FFDPZF048F			48	
FFDPZF024F			24	
FFDPZF096F			96	
FFDPZF072F			72	



FFDPBF012F

Fiber Optic Connectors

OptiCam® LC Fiber Optic Connectors – Pre-Polished Cam Termination

Part Number	Cable Type	Connector Variant	Fiber Type	Color
FLCSMCXAQY	Simplex	Multimode	OM3/OM4/OM5	Aqua
FLCSSCBUY		Singlemode	OS1/OS2	Blue
FLCDMCXAQY	Duplex	Multimode	OM3/OM4/OM5	Aqua
FLCSSBUY	Simplex	Singlemode	OS1/OS2	Blue
FLCDSCBUY	Duplex			



FLCSMCXAQY



FLCSSCBUY

OptiCam® SC/ST Fiber Optic Connectors – Pre-Polished Cam Termination

Part Number	Cable Type	Connector Variant	Fiber Type	Color
FSC2MC6EI	Simplex	Multimode	OM1	Electric Ivory
FSC2MCXAQ			OM3/OM4/OM5	Aqua
FSC2SCBU		Singlemode	OS1/OS2	Blue
FST2MC6EI		Multimode	OM1	Electric Ivory
FST2SCBU		Singlemode	OS1/OS2	Blue



FSC2MC6EI



FSC2MCXAQ

Fiber Optic Connectors, continued

Fusion Splice Fiber Optic Connectors

Part Number	Cable Type	Connector Variant	Fiber Type	Color
FLCS2/9SOC PXAQ	LC	900µm Tight Buffered or 250µm Loose Tube	OM3/OM4/OM5	Aqua



FLCS2/9SOC PXAQ

Fiber Optic Adapters and Modules

Fiber Optic Adapters


Part Number	Adapter Type	Split Sleeve	Color
FADSLCZQA-L	Duplex LC	Zirconia	Aqua
FASSCZAG-L	Simplex SC APC		Green



FADSLCZQA-L

Mini-Com® Fiber Optic Adapter Modules

Part Number	Adapter Type	Split Sleeve	Color	Module Color
CMSBUSCZBL	Simplex SC	Zirconia	Blue	Fiber Optic Adapters
CMSAGSCZBL	Simplex SC APC		Green	
CMSAQSCZBL	Simplex SC		Aqua	
CMDBUSCZBU	Duplex SC		Blue	
CMDBUSCZBL				
CMDSLCZEI	Duplex LC		Blue	Electric Ivory
CMDSLCZBL				Black
CMDSAQLCZBL			Green	Blue
CMDSLCZBU			Blue	
CMDSEILCZEI			Electric Ivory	Electric Ivory



CMSAQSCZBL



CMDSLCZBU

HD Flex™ Adapter Panel and Accessories

Part Number	Description	Color
FHSXN-12-10N	6 LC Splice Duplex Multimode adapters in aqua with zirconia sleeves. No pigtails included.	Black
FHS9N-12-10N	6 LC FAP Duplex Singlemode adapters in aqua with zirconia sleeves. No pigtails included.	
FHSXN-08-10N	6 LC FAP Duplex OM3 adapters in aqua with zirconia sleeves. No pigtails included.	
FHS6N-08-10N	6 LC FAP Duplex OM1 adapters in aqua with zirconia sleeves. No pigtails included.	
FHS9N-08-10N	6 LC FAP Duplex OS2 adapters in aqua with zirconia sleeves. No pigtails included.	
FHS9N-08-LAN	4 LC/APC FAP duplex OS2 adapters in green with zirconia sleeves. No pigtails included.	
FHSBBL06W	HD Flex Blanking Panel for 6-port enclosures and panels.	White
FHMP-6-ABL	6 MPO type A adapters (key-up to key-down) in black.	Black
FHMP-4-BCG	4 MPO type B adapters (key-up to key-up) in charcoal grey.	
FHMP-4-ABL	4 MPO type A adapters (key-up to key-down) in black.	
FHMP-4-ARD	4 MPO type A adapters (key-up to key-down) in red.	



FHSXN-12-10N



FHSBBL06W



FHMP-6-ABL

Fiber Optic Adapters and Modules, continued

Opticom® Fiber Adapter Panels (FAPs)

Part Number	No. of Ports	Adapter Type	Fiber	Split Sleeve	Color
LC Fiber Adapter Panels					
FAP6WAQDLCZ	6	Duplex LC	12	Zirconia	Aqua
FAP12WAQDLCZ	12		24		
FAP6WLM DLCZ	6		12		Lime Green
FAP12WLM DLCZ	12		24		
FAP6WBUDLCZ	6	Simplex LC	12	Zirconia	Blue
FAP12WBUDLCZ	12		24		
FAP8WBUDLCZ	8		16		
FAP12WBUDLCZ	12	Duplex LC	24		



FAP12WAQDLCZ



FAP6WAQDSCZ

SC Fiber Adapter Panels

FAP12WAGSCZ	12	Simplex SC/APC	24	Zirconia	Green
FAP6WAGDSCZ	6	Duplex SC/APC	12		
FAP6WAQDSCZ	6	Duplex SC	12		Aqua
FAP12WBUSCZ	12	Simplex SC	24		
FAP3WBUDSCZ	3	Duplex SC	6	Zirconia	Blue
FAP6WBUDSCZ	6		12		

Opticom® MPO Fiber Adapter Panels (FAPs)

Part Number	No. of Adapters	Adapter Type	Polarity	Orientation	Color
FAPH0412BLMPO	4	12f MPO	Method A, Key-Up/Key-Down	Horizontal	Black
FAPH0812BLMPO	8				
FAPH1212BLMPO	12				



FAPH0412BLMPO

QuickNet™ SFQ MPO Fiber Adapter Panels (FAPs)

Part Number	No. of Adapters	Adapter Type	Orientation	Color
FQMAP65BL	6	12f MPO	Method A, Key-Up/Key-Down	Black
FQMAP66CG			Method B, Key-Up/Key-Up	Charcoal Gray
FQMAP86CG	8			



FQMAP65BL

Fiber Optic Cassettes

HD Flex Splice Cassettes

Part Number	Fiber Type	Fiber Count	Pigtails	No. of Duplex LCs	Performance
FHSZO-12-10P	OM4	12	250µm Pigtails	6	Optimized
FHS9N-12-10P	OS2				Standard
FHSZO-12-10R	OM4		Ribbon		Optimized
FHS9N-12-10R	OS2				Standard



FHSZO-12-10P

HD Flex Splitter Cassettes (Front Facing)

Part Number	Fiber Type	Connector	Number of Input Ports	Number of Output Ports
FHP9N-LA1X02	OS2	LC/APC	1	2
FHP9N-LA1X04				4
FHP9N-LA1X08				8
FHP9N-LA1X16				16



FHP9N-LA1X02

HD Flex LC/MPO Cassettes

Part Number	Fiber Type	Fiber Count	No. of Rear MPOs	No. of Front Duplex LCs	Performance	Polarity
FHCZO-24-10BN	OM4	24	2 x 12f	12#	Optimized	Method B
FDCZO-24-10ASLH						
FDCZA-24-10ULH					Ultra	Universal
FDCZO-24-10ASRH					Optimized	Method A
FDCZO-24-10ULH						Universal
FHCWA-24-10U	OM5				Standard	



FHCZO-24-10BN

HD Flex™ Breakout Cassette

Part Number	Fiber Type	Fiber Count	Port Count	No. of MPO	Performance	Polarity
FHC3WO-08H-10A	OM5	8	4	1	Optimized	Method A
FHC3WO-08-10B						Method B
FHC3WO-08H-10B						
FHC3WO-24H-10B		24	12	3	Standard	Method A
FHC3WO-24H-10A						
FHC3WA-08H-10A		8	4	1		Method B
FHC3WA-24H-10A		24	12	3		
FHC3WA-08H-10B		8	4	1	Optimized	Method B
FHC3WO-08-10A						Method A
FHC3WA-24H-10B		24	12	3	Standard	Method B



FHC3WO-08H-10A



FHC3WA-08H-10B

Fiber Optic Cassettes, continued

HD Flex Cassette, 4-to-1 Conversion

Part Number	Fiber Type	Fiber Count	Port Count	No. of MPO	Performance	Polarity		
FHC390-24H-10U2	OS2	24	12	1x12f	Optimized	Universal-2		
FHC3WA-08H-10U2	OM5	8	4		Ultra			
FHC390-08H-10U2	OS2	24	12		Optimized			
FHC3ZA-24H-10U2	OM4	8	4		Ultra			
FHC390-08H-10U	OS2				Optimized	Universal		
FHC3WA-08H-10U	OM5				Ultra			
FHC3ZO-08-10U	OM4				Optimized			
FHC3SA-08H-10U					Ultra			
FHC3SA-08-10U								
FHC3WA-24H-10U	OM5	24	12					
FHC3ZO-08H-10U2	OM4	8	4		Optimized	Universal-2		
FHC39N-24H-10U	OS2	24	12		Standard	Universal		
FHC3WA-24H-10U2	OM5							
FHC3SA-08-10U2	OM4	8	4		Optimized	Universal-2		
FHC390-08-10U	OS2					Universal		
FHC3WO-24H-10U2	OM5	24	12			Universal-2		
FHC3ZO-08-10U2	OM4	8	4					
FHC3ZO-08H-10U		24	12					
FHC3SA-24H-10U	OM5				Ultra	Universal		
FHC3WO-08-10U2	OM5	8	4		Optimized	Universal-2		
FHC3ZA-08H-10U	OM4				Ultra	Universal		
FHC39N-24H-10U2	OS2	24	12		Standard	Universal-2		
FHC3WO-08-10U	OM5	8	4		Optimized	Universal		
FHC39N-08H-10U2	OS2							
FHC3SA-08H-10U2	OM4				24	12	Ultra	Universal-2
FHC3ZA-08-10U2								
FHC3ZO-24H-10U2		24	12		Optimized	Universal		
FHC3WO-08H-10U	OM5	8	4					
FHC3SA-24H-10U2	OM4	24	12		Ultra	Universal-2		
FHC3ZA-24H-10U						Universal		
FHC390-08-10U2	OS2	8	4		Optimized	Universal-2		
FHC3WO-24H-10U	OM5	24	12			Universal		
FHC3WA-08-10U2			8		4	Ultra	Universal-2	
FHC39N-08-10U2	OS2							
FHC3WO-08H-10U2	OM5				Optimized			
FHC3ZO-24H-10U	OM4	24	12					
FHC3WA-08-10U	OM5	8	4		Ultra	Universal		
FHC39N-08-10U	OS2				24		12	—
FHC39N-08H-10U								
FHC390-24H-10U					Optimized			
FHC3ZA-08-10U	OM4	8	4		Ultra	Universal-2		
FHC3ZA-08H-10U2								



FHC390-24H-10U2



FHC3WA-08H-10U



FHC3ZA-08-10U2

Fiber Optic Cassettes, continued

FlexCore Front Access ODF Fiber Optic Splice Cassette

Part Number	Fiber Type	Fiber Count	Pigtails	Performance
FDS9N-24-LAP	OS2	24	250µm Pigtails	Standard
FDS9N-24-10P			Ribbon	
FDS9N-24-LAR				
FDS9N-24-10R			Splice Only Cassette	
FDSN-24	OM4	24	250µm Pigtails	Standard
FDSZO-24-10P				



FDS9N-24-LAP



FDSZO-24-10P

FlexCore Front Access ODF Fiber Optic Cassette

Part Number	Fiber Type	Fiber Count	No. of Rear MPOs	Connector Type	Performance	Polarity
FDC9N-24-10ULH	OS2	24	2 x 12f	LC	Standard	Universal
FDC9N-24-10ASLH				LC/APC		Method A
FDC9N-24-LAASLH						Universal
FDC9N-24-LAULH						



FDC9N-24-10ASLH

FlexCore LC Front-Access Indoor/Outdoor Fiber Optic Cassettes

Part Number	Fiber Type	Connector	Ports	Flame Rating	Performance
FZUYXPXRNNONF050	OM4	24	12	Plenum	Optimized
FZUYXPXLNNONF050					Ultra
FZUYXPXRNNNNF050					
FZUYXPXLNNNNF050					
F9UYXPXLNNSNF050	OS2	24	12	Plenum	Ultra
F9UYXPZLNNSNF050					
F9UYXPXRNNSNF050					
F9UYXPZRNNSNF050					
FSUYXPXLNNNNF050		—	—		
FSUYXPXRNNNNF050		—	—		



FZUYXPXRNNONF050



F9UYXPXLNNSNF050

Opticom Front Access

Part Number	Fiber Type	Fiber Count	Form Factor	LC Connectivity	MPO Connectivity	Polarity
FCF3ZO-16-10U	OM4	16	OptiCom®	8 LC Duplex	2 MPO	Universal
FCF3ZO-16-10U2						Universal-2
FCF39N-16-10U	OS2	16	OptiCom®	8 LC Duplex	2 MPO	Universal
FCF39N-16-10U2						Universal-2
FQF3ZO-08-10U	OM4	8	QuickNet® SFQ	4 LC Duplex	1 MPO	Universal
FQF3ZO-08-10U2						Universal-2
FQF39N-08-10U	OS2	8	QuickNet® SFQ	4 LC Duplex	1 MPO	Universal
FQF39N-08-10U2						Universal-2



FCF3ZO-16-10U



FCF39N-16-10U

Fiber Optic Cassettes, continued

Opticom Cassette, 4-to-1 Conversion

Part Number	Fiber Type	Fiber Count	Port Count	No. of Rear MPOs	Performance	Polarity	
FQ3WA-08-10U	OM5	8	4	1x12f	Optimized	Universal	
FC39N-16-10U	OS2	16	8		Standard		
FC39O-16-10U					Optimized		
FC3SA-16-10U2	OM4				Ultra	Universal-2	
FC39N-16-10U2	OS2				Standard		
FC3WA-16-10U2	OM5				Ultra		
FC39O-16-10U2	OS2				Optimized		
FC3WO-16-10U2	OM5				Ultra	Optimized	Universal
FC3SA-16-10U	OM4						
FC3WO-16-10U	OM5					Optimized	
FC3WA-16-10U						Ultra	
FC3ZA-16-10U2	OM4				Universal		
FC3ZA-16-10U					Universal-2		
FC3ZO-16-10U2					Optimized	Universal	
FC3ZO-16-10U							



FQ3WA-08-10U



FC39O-16-10U



FQWA-12-10U



FQ3SA-08-10U2



FQ39N-08-10U2



FQ3WO-08-10U

QuickNet SFQ MPO Fiber Optic Cassettes

Part Number	Fiber Type	Fiber Count	No. of Rear MPOs	No. of Front Duplex LCs	Performance	Polarity
FQWA-12-10U	OM5	12	1x12f	6	Ultra	Universal

QuickNet 4-to-1 Conversion Cassettes

Part Number	Fiber Type	Fiber Count	Port Count	No. of Front Duplex LCs	Performance	Polarity
FQ3SA-08-10U2	OM4	8	4	1x12f	Ultra	Universal-2
FQ3ZA-08-10U2					Optimized	Universal
FQ3ZO-08-10U						

QuickNet SFQ 4-to-1 Conversion Cassettes

Part Number	Fiber Type	Fiber Count	Port Count	No. of Rear MPOs	Performance	Polarity
FQ39N-08-10U2	OS2	8	4	1x12f	Standard	Universal-2
FQ3WA-08-10U2	OM5				Ultra	
FQ3ZO-08-10U2	OM4				Optimized	
FQ39O-08-10U	OS2				Ultra	Universal
FQ3SA-08-10U					Optimized	
FQ3WO-08-10U	OM5				Standard	
FQ39N-08-10U	OS2				Optimized	Universal-2
FQ39O-08-10U2					Ultra	Universal
FQ3ZA-08-10U	OM4				Ultra	Universal-2
FQ3WO-08-10U2	OM5					

Fiber Optic Cassettes, continued

Fiber Optic Enclosures and Accessories

Part Number	Description
FlexCore™ Optical Distribution Frame	
FDF45GY	FlexCore Optical Distribution Frame, Front Access, Gray
FDFEP45GY	FlexCore Optical Distribution Frame, End Panel, Gray
FDFVCM1545GY	FlexCore Optical Distribution Frame, 150mm Vertical Cable Manager, Gray
FDFSPLKITBL	FlexCore Optical Distribution Frame, Ingress Egress Kit with Holder
FDFVCM3045GY	FlexCore Optical Distribution Frame, 300mm Vertical Cable Manager, Gray
FDFMX5KITBL	FlexCore Optical Distribution Frame, Ingress Egress Kit with Holder
FDFUE4GY	ODF Front Access Universal Enclosure, 4 RU, Gray 12 x Slide out trays
FlexCore Tethered Fiber Optic Enclosure	
F8BNMMRBNSAF150	Right cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC/APC Cassettes, Standard Insertion Loss, Straight - 150 Feet Through Polarity
F8BNMMRBNSAF050	Right cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC/APC Cassettes, Standard Insertion Loss, Straight - 50 Feet Through Polarity
F8BNMMLBNSAF050	Left cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC/APC Cassettes, Standard Insertion, Loss, Straight Through Polarity- 50 Feet
F8BNM9RBNSAF050	Right cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC Cassettes, Standard Insertion Loss, Straight - 50 Feet Through Polarity
F8BNMMLBNSAF100	Left cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC/APC Cassettes, Standard Insertion Loss, Straight - 100 Feet Through Polarity
F8BNM9LBNSAF150	Left cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC Cassettes, Standard Insertion Loss, Straight Through Polarity - 150 Feet
F8BNM9RBNSAF150	Right cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC Cassettes, Standard Insertion Loss, Straight Through Polarity - 150 Feet
F8BNM9LBNSAF050	Left cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC Cassettes, Standard Insertion Loss, Straight - 50 Feet Through Polarity
F8BNMMLBNSAF150	Left cable entry, Singlemode OS2 288 Fiber Rollable Ribbon Trunk, Multi Rated I/O Riser, LSZH, Euroclass Cca Jacket, Pre-Terminated to Duplex LC/APC Cassettes, Standard Insertion, Loss, Straight Through Polarity- 150 Feet
HD Fusion Splicing Enclosure and Accessories	
FWMHSSGS-6912	Fiber Wall Mount Hyper Scale Splicing Enclosure with Split Doors, Gray, 6912 Fibers
FWMHSSGS-3456	Fiber Wall Mount Hyper Scale Splicing Enclosure with Split Doors, Gray, 3456 Fibers
HD Flex™ Enclosures, Panels, and Accessories	
FLEX4U06WH	6-Port panel, 48 Cassette/FAP openings, 4 RUs, White
Opticom® QuickNet™ Wall Mount Enclosures	
FWME4	2 FAP/FMP Openings
FWME2	4 FAP/FMP Openings

continued on next page



FDF45GY



FDFVCM1545GY



F8BNMMRBNSAF150



FWMHSSGS-6912



FLEX4U06WH



FWME4

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products


Fiber Optic Cassettes, continued

Fiber Optic Enclosures and Accessories, continued

Part Number	Description
Opticom® Rack Mount Fiber Trays	
FMT2	Mount with 2 CFAPPBL1 fiber adapter patch panels, 8 Cassette/ FAP/FMP Openings, Black
Fiber Optic Enclosure Accessories	
FOSMF	Splice module holds and protects up to 24 fusion splices for use with Opticom QuickNet Enclosures
FST24	Fiber splice tray kit for up to 24 mechanical or fusion splices or 144 ribbon fusion splices for use in FRME4
FST6	Fiber splice tray kit for up to 12 mechanical or fusion splices for use in FMT, FWME4 and FWME8
FSTK	Fiber splice tray kit for up to 6 mechanical or fusion splices for use in FWME2
FOBKF432YM1	Fiber Optic Breakout Kit, Flat, 432-fiber, singlemode, 1m
FOBKF576YM1	Fiber Optic Breakout Kit, Flat, 576-fiber, singlemode, 1m
FOBKF864YM1	Fiber Optic Breakout Kit, Flat, 864-fiber, singlemode, 1m



FMT2



FOSMF



FST6

Fiber QuickNet Harness Cable Assemblies

Part Number	Fiber Type	Connector Type	Fiber Count	Breakout	Flame Rating	Length ft. (m)
FZ8RP5NLSQNM002	OM4	MPO-8 Female to LC Duplex	8	60CM (24 inches) equal breakout	Plenum	6.5 (2)
FZ8RP5NLSQNM003						9.8 (3)
FZ8RP5NLSQNM005						16.4 (5)
FZ8RP5NLSQNM008						26.2 (8)
FZ8RP5NLSQNM012						39.3 (12)
FZ8RP5NLSQNM010						32.8 (10)
FZ8RP5NLSQNM015						49.2 (15)



FRME1U



FZ8RP5NLSQNM002

Fiber Optic Patch Cord and Pigtail Assemblies

Plenum Small Diameter Trunk Assemblies

Part Number	Fiber Type	Connector Type	Fiber Count	Jacket in (mm)	Flame Rating	Performance	Length ft. (m)				
F92ERLNLNSNM002	OS1/ OS2	LC Duplex to LC Duplex	2	0.06 (1.6)	Riser	Standard IL	6.5 (2)				
F92ERLNLNSNM003							9.8 (3)				
FX2ERLNLNSNM001	OM3						3.2 (1)				
FX2ERLNLNSNM002							6.5 (2)				
FX2ERLNLNSNM003							9.8 (3)				
F91BN1NNNSNM002	OS2	LC to Pigtail	1	No Jacket	Not Rated		6.5 (2)				
F91BN1NNNSNM003							9.8 (3)				
FW2ERQ1Q1SNM002	OM5	LC Push-Pull to LC Push-Pull	2	0.06 (1.6)	Riser		6.5 (2)				
FW2ERQ1Q1SNM003							9.8 (3)				
FW2ERQ1Q1SNM005							16.5 (5)				
FW2ERQ1Q1SNM010							32.8 (10)				
FW1BN1NNNSNM001		LC Simplex to Pigtail	1	No Jacket	Not Rated		3.2 (1)				
FW2ERLNLNNNM002							LC Duplex to LC Duplex	2	0.06 (1.6)	Riser	6.5 (2)
FW2ERLNLNNNM003		9.8 (3)									
FW2ERLNLNNNM005		16.5 (5)									
FW2ERLNLNNNM010		32.8 (10)									
FW2ERLNSNSNM002		LC Duplex to SC Duplex									6.5 (2)
FW2ERLNSNSNM003											9.8 (3)
FW2ERLNSNSNM005							16.5 (5)				
FW2ERLNSNSNM010							32.8 (10)				
FW2RPU1U1NNM002		LC Uniboot to LC Uniboot	2	0.08 (2.0)	Plenum	Ultra IL	6.5 (2)				
FW2RPU1U1NNM003							9.8 (3)				
FW2RPU1U1NNM005	16.5 (5)										
FW2RPU1U1NNM010	32.8 (10)										
FW2RPU1U1ONM002	Optimized IL					6.5 (2)					
FW2RPU1U1ONM003						9.8 (3)					
FW2RPU1U1ONM005						16.5 (5)					
FW2RPU1U1ONM010						32.8 (10)					



F92ERLNLNSNM002



FX2ERLNLNSNM001



F91BN1NNNSNM002



FW2ERQ1Q1SNM002



FW1BN1NNNSNM001



FW2ERLNSNSNM002



FW2RPU1U1NNM002

Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions

Terminals

Wiring Ducts

Stronghold
Contractor
Products

Fiber Optic Patch Cord and Pigtail Assemblies, continued

Plenum Small Diameter Trunk Assemblies

Part Number	Fiber Type	Connector Type	Fiber Count	Jacket in (mm)	Flame Rating	Performance	Length ft. (m)				
FX23RSNSNSNM001	OM3	SC Duplex to SC Duplex	2	0.12 (3.0)	Riser	Standard IL	3.2 (1)				
FX2ERLNLNSNM1.5							11.4 (1.5)				
FX23RSNSNSNM002		LC Duplex to LC Duplex		0.06 (1.6)			6.5 (2)				
FX2ERLNLNSNM004							9.8 (3)				
FX2ERLNLNSNM005							13.1 (4)				
FX2ERLNLNSNM006							16.5 (5)				
FX2ERLNLNSNM008							26.2 (8)				
FX2ERLNLNSNM010							32.8 (10)				
FX2ERLNLNSNM015							49.2 (15)				
FX2ERLNLNSNM020							65.6 (20)				
FZ1BN1NNNSNM001	OM4	LC to Pigtail	2	0.08 (2.0)	Not Rated	Ultra IL	3.2 (1)				
FZ2ERQ1Q1SNM004		LC Push-Pull					13.1 (4)				
FZ2ERQ1Q1SNM005							16.5 (5)				
FZ2ERLNLNSNM015		LC Duplex to LC Duplex	2		Riser		49.2 (15)				
FZ2RPU1U1NNM001		LC Uniboot to LC Uniboot				Plenum	Optimized IL	3.2 (1)			
FZ2RPU1U1NNM002								6.5 (2)			
FZ2RPU1U1NNM003								9.8 (3)			
FZ2RPU1U1NNM005								16.5 (5)			
FZ2RPU1U1NNM010								32.8 (10)			
FZ2RPU1U1NNM015								49.2 (15)			
FZ2RPU1U1ONM001								3.2 (1)			
FZ2RPU1U1ONM002								6.5 (2)			
FZ2RPU1U1ONM003	9.8 (3)										
FZ2RPU1U1ONM005	16.5 (5)										
FZ2RPU1U1ONM010	32.8 (10)										
FZ2RPU1U1ONM015	49.2 (15)										
F91ERANB1SNM002	OS1/ OS2	SC/APC to LC/APC	1	0.06 (1.6)	Riser	Standard IL	6.5 (2)				
F91ERANB1SNM003							9.8 (3)				
F91ERANB1SNM005							16.5 (5)				
F91ERANB1SNM010							32.8 (10)				
F91ERANB1SNM015							49.2 (15)				
F91ERANB1SNM020							65.6 (20)				



FX23RSNSNSNM001



FZ1BN1NNNSNM001



FZ2ERLNLNSNM015



FZ2RPU1U1NNM001



F91ERANB1SNM002

Fiber Optic Trunk Cable Assemblies



FY9AP77A005F015



FYZAP77Y005F015

Plenum Small Diameter Trunk Assemblies

Part Number	Fiber Type	Fiber Count	Connector Type	Flame Rating	Performance	Polarity	Pulling Eye	Length ft. (m)		
FY9AP77A005F015	OS2	144	PanMPO Female with 1m breakout to PanMPO Female with 1m breakout		Standard IL	Polarity A	—	15.0 (3.81)		
FY9AP77A005F100								100.0 (30.48)		
FY9YP77A005F015		96						15.0 (3.81)		
FY9YP77A005F100								100.0 (30.48)		
FY9WP77A005F015		48						15.0 (3.81)		
FY9WP77A001F015								100.0 (30.48)		
FY9WP77A001F100								100.0 (30.48)		
FY9WP77A005F100										
FY9WPLLS005F015		Duplex LC with 1m breakout to Duplex LC with 1m breakout				Standard	End A	15.0 (3.81)		
FY9WPLLS005F100								100.0 (30.48)		
FY9XP77A005F015	72	PanMPO Female with 1m breakout to PanMPO Female with 1m breakout			Polarity A	—	15.0 (3.81)			
FY9XP77A005F100							100.0 (30.48)			
FYZAP77Y005F015	OM4	144		Plenum	Optimized IL	Polarity B	—	15.0 (3.81)		
FYZAP77Y005F100								100.0 (30.48)		
FYZUPLLO005F100		24	Duplex LC with 1m breakout to Duplex LC with 1m breakout			Standard	End A			15.0 (3.81)
FYZUPLLO005F015										100.0 (30.48)
FYZXP77Y005F015		72	PanMPO Female with 1m breakout to PanMPO Female with 1m breakout					Polarity B	—	15.0 (3.81)
FYZYP77Y005F100										100.0 (30.48)
FYZWP77Y001F015		48	Duplex LC with 1m breakout to Duplex LC with 1m breakout					Standard	End A	15.0 (3.81)
FYZXP77Y005F100										100.0 (30.48)
FYZWPLLO005F100										15.0 (3.81)
FYZWPLLO005F015										100.0 (30.48)
FYZWP77Y005F100		96	PanMPO Female with 1m breakout to PanMPO Female with 1m breakout					Polarity B	—	15.0 (3.81)
FYZYP77Y005F015										100.0 (30.48)
FYZWP77Y001F100		48								15.0 (3.81)
FYZWP77Y005F015										100.0 (30.48)
FYZAP77A005F015										15.0 (3.81)

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

INDUSTRIAL NETWORKS

IndustrialNet™ Copper Cable	35
Industrial Fiber Optic Cable	35
IndustrialNet™ Copper Connectors	35
Industrial Accessories	35
Industrial Network Uninterruptible Power Supply (UPS).....	36
Pre-Configured Micro Data Center (MDC).....	36

IndustrialNet™ Copper Cable

Part Number	Category	AWG	Description	Package ft. (m)	Color
ETHERNET/IP Category 6A/Category 6					
ISFCH6X04BTL-UG	Category 6A	26/7	4-pair, SF/UTP, CM/CMX, 600V, High Flex, Oil Res, UV Res, Abrasion Res, Weld Splatter Res	1000 (305) reel	Teal
ISFCH6X04ATL-UG					Black
IFRH6C04BL-UG	Category 6				
ETHERNET/IP Category 5e					
ISFCH5C02ATL-XG	Category 5e	24/7	2-pair, SF/UTP, CM/CMX, 600V, High Flex, Oil Res, UV Res, Abrasion Res, Weld Splatter Res	1000 (305) reel	Teal
ISFCH5C04ATL-XG			4-pair, SF/UTP, CM/CMX, 600V, High Flex, Oil Res, UV Res, Abrasion Res, Weld Splatter Res		Black
ISFCH5C04ABL-XG					



ISFCH6X04ATL-UG



IFRH6C04BL-UG



ISFCH5C04ATL-XG

Industrial Fiber Optic Cable

Part Number	Category	Description	Color
FOJDZ12	OM4	12	50um, Indoor/Outdoor DDJ cable, Riser (OFNR-LS), LSZH
FSJD912	OS2	12	9um, Indoor/Outdoor DDJ cable, Riser (OFNR-LS), LSZH



FOJDZ12



FSJD912

IndustrialNet™ Copper Connectors

Part Number	Performance Level	Description
IAEBHC5ES	Category 5e	Shielded Variant 1 IP67 RJ45 Connector



IAEBHC5ES

Industrial Accessories

Part number	Description	Color
-------------	-------------	-------

Mini-Com DIN Rail Mount Adapter

CADIN1BL	Single-Port DIN Rail Mount Adapter	Black
CADIN1BL-S	Shielded Single-Port DIN Rail Mount Adapter	
CADIN1IG	Single-Port DIN Rail Mount Adapter	International Grey
CADIN1IG-S	Shielded Single-Port DIN Rail Mount Adapter	



CADIN1BL



CADIN1IG

IndustrialNet DIN Rail Mount Fiber Enclosure

FDPPSIG	Fiber Optic Enclosure, DIN Rail Mount, Standard Depth for use with FAPs	International Grey
FDPPEIG	Fiber Optic Enclosure, DIN Rail Mount, Extended Depth for use with FAPs and OptiCom Cassettes	



FDPPSIG



CDPP8RG

IndustrialNet DIN Rail Mount Copper Patch Panel

CDPP8RG-S	Shielded 8-Port Patch Panel, DIN Rail Mount	International Grey
CDPP8RG	8-Port Patch Panel, DIN Rail Mount I	

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Industrial Network Uninterruptible Power Supply (UPS)

Part number	Description
UPS00100DC	Uninterruptible Power Supply (UPS), 100W; No-Battery, Maintenance-Free with Remote Management; 24-28 VDC In/Out; DIN Rail Mount
UPS003LSM	UPS Load Sense Module; Optional Accessory for Use in Dual, Redundant Power Supply Configurations to Monitor Load on Primary Supply



UPS00100DC UPS003LSM

Pre-Configured Micro Data Center (MDC)

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	Description	No. of Rack Units	Color
MDC82NN	78.7 (2000)	27.6 (700)	47.2 (1199)	NEMA Type 12, IP55, Single Hinge Front Door with Windowed Glass, Single Hinge Rear Door, Solid Side Panels (2), Side Panel, Network Cabling, Patch Panels, Cable Management, Grounding, and Casters	42	Gray



MDC82NN

AUDIO VIDEO SYSTEMS

Extenders	38
Transmitters and Receivers.....	38
Switchers	39
Controllers.....	41
Scalers	42
Amplifiers.....	42
Scalers	43
Sensors, Connectivity, and Cable Management	43

Extenders

Avance™ 4K/UHD Extender Kits

Part number	Description
AT-AVA-EX100CE-BP-KIT	Avance 4K/UHD HDMI Extender Kit with Ethernet, Control, and Bidirectional Remote Power
AT-AVA-EX70-2PS-KIT	Avance 4K/UHD HDMI Extender Kit
AT-AVA-EX70-KIT	Avance 4K/UHD HDMI Extender Kit with Remote Power,
AT-AVA-EX70C-BP-KIT	Avance 4K/UHD HDMI Extender Kit with Control and Bidirectional Remote Power
AT-AVA-EX70C-KIT	Avance 4K/UHD HDMI Extender Kit with Control and Remote Power



AT-AVA-EX100CE-BP-KIT



AT-AVA-EX70-KIT



AT-OME-EX-WP-KIT



AT-OME-EX-KIT-LT

HDMI Over HDBaseT™ Extenders

Part number	Description
AT-OME-EX-WP-KIT	Wallplate HDBaseT Extender with HDMI Input and USB Hubs
AT-OME-EX-WP-KIT-LT	Wallplate HDBaseT Extender with HDMI Input and USB Hubs
AT-OME-EX-KIT-LT	HDBaseT Extender with HDMI Input and USB Hubs

HDBaseT Extender

Part number	Description
AT-USB-EX100-KIT	USB 2.0 Extender Kit over Category Cable, up to 100 meters



AT-USB-EX100-KIT

Transmitters and Receivers

HDBaseT Transmitter/Receiver Kits

Part number	Description
AT-HDR-EX-100CEA-KIT	4K HDR HDMI Over 100 M HDBaseT TX/RX with Ethernet, Control, PoE, and Return Audio
AT-HDR-EX-100CEA-RX	4K HDR HDBaseT Receiver with Control, Ethernet, and Remote Power
AT-HDR-EX-70-2PS	4K HDR HDMI Over HDBaseT TX/RX Kit
AT-HDR-EX-70C-KIT	4K HDR HDMI Over HDBaseT TX/RX with Control and PoE
AT-HDR-EX-70C-RX	4K HDR HDBaseT Receiver with Control and Remote Power



AT-OME-EX-TX-WP



AT-OME-EX-TX-WPC



AT-OME-SW21-TX-WPC

HDMI Over HDBaseT™ Receiver

Part number	Description
AT-OME-EX-RX	HDBaseT Receiver with USB Hub
AT-OME-RX11	HDBaseT Receiver with Audio De-Embedding



AT-OME-EX-RX



AT-OME-RX11

HDMI Over HDBaseT Receivers

4K/UHD HDMI over HDBaseT Receiver

Part number	Description
AT-UHD-EX-70C-RX	4K/UHD HDMI Over HDBaseT Receiver with Control and PoE



AT-UHD-EX-70C-RX

Switchers

HDMI to HDMI Matrix Switchers

Part number	Description
AT-HDR-H2H-44MA	4K HDR 4x4 HDMI Matrix Switcher
AT-HDR-H2H-88MA	4K HDR 8x8 HDMI Matrix Switcher
AT-HDR-M2C	4K HDR Multi-Channel Audio Converter
AT-HDR-SW-52	4K HDR 5x2 HDMI Matrix Switcher
AT-HDR-SW-52ED	4K HDR 5x2 HDMI Matrix Switcher with HDMI and HDBaseT Outputs



AT-HDR-H2H-44MA



AT-HDR-M2C

Switchers for HDMI and VGA

Part number	Description
AT-HDVS-150-TX	Three-Input HDBaseT Transmitter for HDMI and VGA
AT-HDVS-150-TX-PSK	Three-Input HDBaseT Transmitter for HDMI and VGA
AT-HDVS-150-TX-WP	Wallplate HDBaseT Transmitter for HDMI and VGA
AT-HDVS-150-TX-WP-UK	UK Wallplate HDBaseT Transmitter for HDMI and VGA
AT-HDVS-150-WP-KIT	Wallplate HDBaseT TX/RX for HDMI and VGA
AT-HDVS-150-WP-KIT-UK	UK Wallplate HDBaseT TX/RX for HDMI and VGA
AT-HDVS-200-TX	Three-Input HDBaseT Transmitter for HDMI and VGA
AT-HDVS-200-TX-PSK	Three-Input HDBaseT Transmitter for HDMI and VGA
AT-HDVS-200-TX-WP	Wallplate HDBaseT Transmitter for HDMI and VGA
AT-HDVS-200-TX-WP-BLK	Wallplate HDBaseT Transmitter for HDMI and VGA - Black
AT-HDVS-TX-WP-NB	Blank Face Plate for HDVS Series Wallplate Switchers



AT-HDVS-150-TX-PSK



AT-HDVS-150-TX-WP



AT-HDVS-150-TX-WP-UK



AT-HDVS-200-TX-WP

Switchers for HDMI with HDBaseT™ Output

Part number	Description
AT-HDVS-210H-TX-WP	Two-Input Wallplate HDBaseT Transmitter for HDMI
AT-HDVS-210H-TX-WP-KIT	Two-Input Wallplate HDBaseT TX/RX for HDMI



AT-HDVS-210H-TX-WP-KIT

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Omega™ 4K/UHD Two-Input Switcher

Part number	Description
AT-OME-MH21	Two-Input Switcher with USB-C and HDMI Inputs plus USB Hub
AT-OME-MH21-CP	Two-Input Switcher with USB-C and HDMI Inputs plus USB Hub and Device Charging



AT-OME-MH21

Three-Input Switchers

Part number	Description
AT-OME-ST31A	Three-Input Switcher and HDBaseT Transmitter with USB-C and HDMI Inputs
AT-OME-ST31A-KIT	HDBaseT Extender with USB-C and HDMI Inputs



AT-OME-ST31A

Four-Input with Auto-Switching

Part number	Description
AT-JUNO-451	4K HDR Four-Input HDMI Switcher and Return Optical Audio



AT-JUNO-451

4K/UHD HDMI Five-Input HDMI Switchers

Part number	Description
AT-UHD-SW-5000ED	Five-Input HDMI / HDBaseT Switcher with Mirrored HDMI / HDBaseT Outputs
AT-UHD-SW-51	Five-Input HDMI Switcher
AT-UHD-SW-510W	5x2 Matrix Switcher with Wireless Link
AT-UHD-SW-510W-EU	5x2 Matrix Switcher with Wireless Link (EU)
AT-UHD-SW-510W-KIT	5x2 Matrix Switcher with Wireless Link and RX



AT-UHD-SW-5000ED



AT-UHD-SW-510W-EU

4K/UHD Multi-Format Switchers

Part number	Description
AT-UHD-CLSO-601	Six-Input Multi-Format Switcher with Mirrored HDMI / HDBaseT Outputs
AT-UHD-CLSO-824	8x2 Multi-Format Matrix Switcher with Dual, Mirrored HDMI / HDBaseT Outputs
AT-UHD-EX-100CE-RX	4K/UHD HDMI Over 100 M HDBaseT Receiver with Ethernet, Control, and PoE
AT-UHD-EX-100CE-TX	4K/UHD HDMI Over 100 M HDBaseT Transmitter with Ethernet, Control, and PoE
AT-UHD-EX-70C-TX	4K/UHD HDMI Over HDBaseT Transmitter with Control and PoE



AT-UHD-CLSO-601



AT-UHD-EX-100CE-RX



AT-UHD-EX-100CE-TX

4K HDR HDMI Matrix Switchers

Part number	Description
AT-OPUS-RX	4K HDR HDBaseT RX for Opus Matrix Switchers
AT-OPUS-RX41	Four-Input 4K HDR Switcher with HDMI and HDBaseT Inputs



AT-OPUS-RX

Multi-format Matrix Switchers

Part number	Description
AT-OME-SW32	3x2 Matrix Switcher with USB-C and HDMI Inputs
AT-OME-MS42	4x2 Matrix Switcher with USB Hub
AT-OME-MS42-KIT	4x2 Matrix Switcher with USB Hub and HDBaseT Receiver
AT-OME-MS42-HDBT	4x2 Matrix Switcher with USB Hub and HDBaseT Input
AT-OME-MS52W	5x2 Matrix Switcher with USB Hub and Wireless Link
AT-OME-MS52W-EU	5x2 Matrix Switcher with USB Hub and Wireless Link (EU)
AT-OME-PS62	6x2 Matrix Presentation Switcher with USB Hub



AT-OME-MS42



AT-OME-MS52W



AT-OME-PS62

Controllers

HDMI Display Controller

Part number	Description
AT-DISP-CTRL	Display Controller



AT-DISP-CTRL

Keypad Controllers

Part number	Description
AT-VKP-8E	Velocity 8 Button Keypad Controller
AT-VKP-8E-EU	Velocity 8 Button Keypad Controller – EU / UK Faceplate



AT-VKP-8E

Three-Input HD Video Scaler

Part number	Description
AT-HD-SC-500	Three-Input HD Video Scaler for HDMI and VGA Signals



AT-HD-SC-500

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Scalers

HDBaseT Scalers

Part number	Description
AT-HDVS-150-KIT	HDBaseT TX/RX for HDMI and VGA
AT-HDVS-150-RX	HDBaseT Receiver and Scaler



AT-HDVS-150-KIT

4K/UHD Scalers

Part number	Description
AT-OME-RX21	2×1 AV Switcher and HDBaseT Receiver with Scaler and HDMI Input
AT-OME-RX31	3×1 AV Switcher and Dual HDBaseT Receiver with Scaler and HDMI Input
AT-OME-SR21	2×1 AV Switcher and HDBaseT Receiver with Scaler and HDMI Input plus USB Hub



AT-OME-RX21

Amplifiers

Distribution Amplifiers

Part number	Description
AT-HDR-CAT-2	Two-Output 4K HDR HDMI to HDBaseT Distribution Amplifier
AT-HDR-CAT-4	Four-Output 4K HDR HDMI to HDBaseT Distribution Amplifier
AT-HDR-CAT-4ED	Four-Output Extended Distance 4K HDR HDMI to HDBaseT Distribution Amplifier
AT-HDR-CAT-8	Eight-Output 4K HDR HDMI to HDBaseT Distribution Amplifier



AT-HDR-CAT-2



AT-HDR-CAT-8

4K HDR HDMI Distribution Amplifiers

Part number	Description
AT-RON-442	Two-Output HDMI Distribution Amplifier
AT-RON-444	Four-Output HDMI Distribution Amplifier
AT-RON-448	Eight-Output HDMI Distribution Amplifier



AT-RON-442



AT-RON-448

4K HDR HDMI Distribution Amplifiers

Part number	Description
AT-ANC-108D	8-Button Network Control Panel


Scalers

HDBaseT Scalers

Part number	Description
AT-VSP-800-BL	Velocity 8" Scheduling Touch Panel - Black
AT-VTPG-1000VL-BL	Velocity All-In-One 10" Touch Panel with Gateway - Black
AT-VTPG-1000VL-WH	Velocity All-In-One 10" Touch Panel with Gateway - White
AT-VTP-FMK-10-BL	Flush Mount Kit for Velocity 10" Touch Panels
AT-VTP-TMK	Tabletop Mounting Kit for Velocity Control System Touch Panels



AT-VTPG-1000VL-BL



AT-VTP-FMK-10-BL

Sensors, Connectivity, and Cable Management

Occupancy Sensor

Part number	Description
AT-OCS-900N	Network-Enabled Occupancy Sensor



AT-OCS-900N

USB-C to USB-C Active Cable

Part number	Description
AT-LC-UC2UC-5M	LinkConnect™ USB-C to USB-C Active Cable – 5 Meters



AT-LC-UC2UC-5M

IR Cables

Part number	Description
AT-IR-CS-RX	IR Receiver Cable for Atlona Extenders
AT-IR-CS-TX	IR Emitter Cable
AT-OMNI-IR-TX	IR Emitter Cable for OmniStream Encoders and Decoders
AT-VCC-IR-EMT	IR Emitter Cable for VCC-IR-KIT
AT-VTP-TMK	Tabletop Mounting Kit for Velocity Control System Touch Panels



AT-IR-CS-RX



AT-IR-CS-TX

IP Converters

Part number	Description
AT-VCC-IR3-KIT	IP to IR Command Converter for Velocity Control System with Three Emitters
AT-VCC-RELAY-KIT	IP to Relay/Sensor Signal Converter for Velocity Control System
AT-VCC-RS232-KIT	IP to RS-232 Command Converter for Velocity Control System



AT-VCC-IR3-KIT



AT-VCC-RELAY-KIT

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Etude™ Sync EDID Emulator

Part number	Description
AT-ETU-SYNC	EDID Emulator for 4K HDR HDMI Signals



AT-ETU-SYNC

OmniStream™ Network Encoders and Decoders

Part number	Description
AT-OMNI-111	Networked AV Encoder
AT-OMNI-111-WP	Wallplate Networked AV Encoder
AT-OMNI-112	Dual-Channel Networked AV Encoder
AT-OMNI-121	Networked AV Decoder



AT-OMNI-111

Mid-Span Power Supply


Part number	Description
AT-PS-POE	HDBaseT Mid-Span Power Supply



AT-PS-POE

Rack Mount Shelves

Part number	Description
AT-RACK-1RU	Heavy-Duty Rack Mount Shelf
AT-RACK-1RU-ME	Multi-extender Rack Mount Shelf



AT-RACK-1RU



AT-RACK-1RU-ME

Rack Mount Kit

Part number	Description
AT-UHD-SW-510W-RM	Rack Mount Kit for SW-510W and Half Rack Width Products



AT-UHD-SW-510W-RM

AV Compatible Faceplates, Mini-Com® Blanking Modules, and Couplers

Part number	Description	Color
CFGBBL	Brush Insert for GFCI Faceplate	Black
CFGBWH	Brush Insert for GFCI Faceplate	White
CMBBL-X	Mini-Com® Blank Module	Black
CMBWH-X	Mini-Com® Blank Module	White
CMHDMIBL	Mini-Com® HDMI Coupler Module	Black
CMHDMIWH	Mini-Com® HDMI Coupler Module	White
CMUSBAABL	Mini-Com® USB Coupler Module	Black
CMUSBAAWH	Mini-Com® USB Coupler Module	White



CFGBBL



CMBBL-X



CMHDMIBL



CMUSBAABL

AV Compatible Keystone Blanking Modules and Couplers

Part number	Description	Color
NKBMBL-X	NetKey® Blank Module	Black
NKBMWH-X	NetKey® Blank Module	White
NKHDMIBL	NetKey® HDMI Coupler Module	Black
NKHDMIWH	NetKey® HDMI Coupler Module	White
NKUSBAABL	NetKey® USB Coupler Module	Black
NKUSBAAWH	NetKey® USB Coupler Module	White

AV-Compatible Cable Routing Systems

Part number	Description	Color
AFR4BCBL6	Pan-Way® Above Floor Raceway Base and Cover	Black
AFR4BCOS6	Pan-Way® Above Floor Raceway Base and Cover	Office Slate
AFR4CCBL	Pan-Way® Above Floor Raceway Coupler Cover Fitting	Black
AFR4CCOS	Pan-Way® Above Floor Raceway Coupler Cover Fitting	Office Slate
AFR4ECBL	Pan-Way® Above Floor Raceway End Cap	Black
AFR4ECOS	Pan-Way® Above Floor Raceway End Cap	Office Slate
AFR4JB2SBL	Pan-Way® Above Floor Raceway Double Gang Junction Box	Black
AFR4JB2SOS	Pan-Way® Above Floor Raceway Double Gang Junction Box	Office Slate
AFR4RABL	Pan-Way® Above Floor Raceway Right Angle Fitting	Black
AFR4RAOS	Pan-Way® Above Floor Raceway Right Angle Fitting	Office Slate
AFR4TBLGBL	Pan-Way® Above Floor Raceway Table Leg Fitting	Black
AFR4TBLGOS	Pan-Way® Above Floor Raceway Table Leg Fitting	Office Slate
AFR4TRT70BL	Pan-Way® Above Floor Raceway T-70 Transition Fitting	Black
AFR4TRT70OS	Pan-Way® Above Floor Raceway T-70 Transition Fitting	Office Slate
AFR4WTRBL	Pan-Way® Above Floor Raceway Wall Transition Fitting	Black
AFR4WTROS	Pan-Way® Above Floor Raceway Wall Transition Fitting	Office Slate



NKBMBL-X



NKHDMIBL



NKUSBAABL

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors


Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

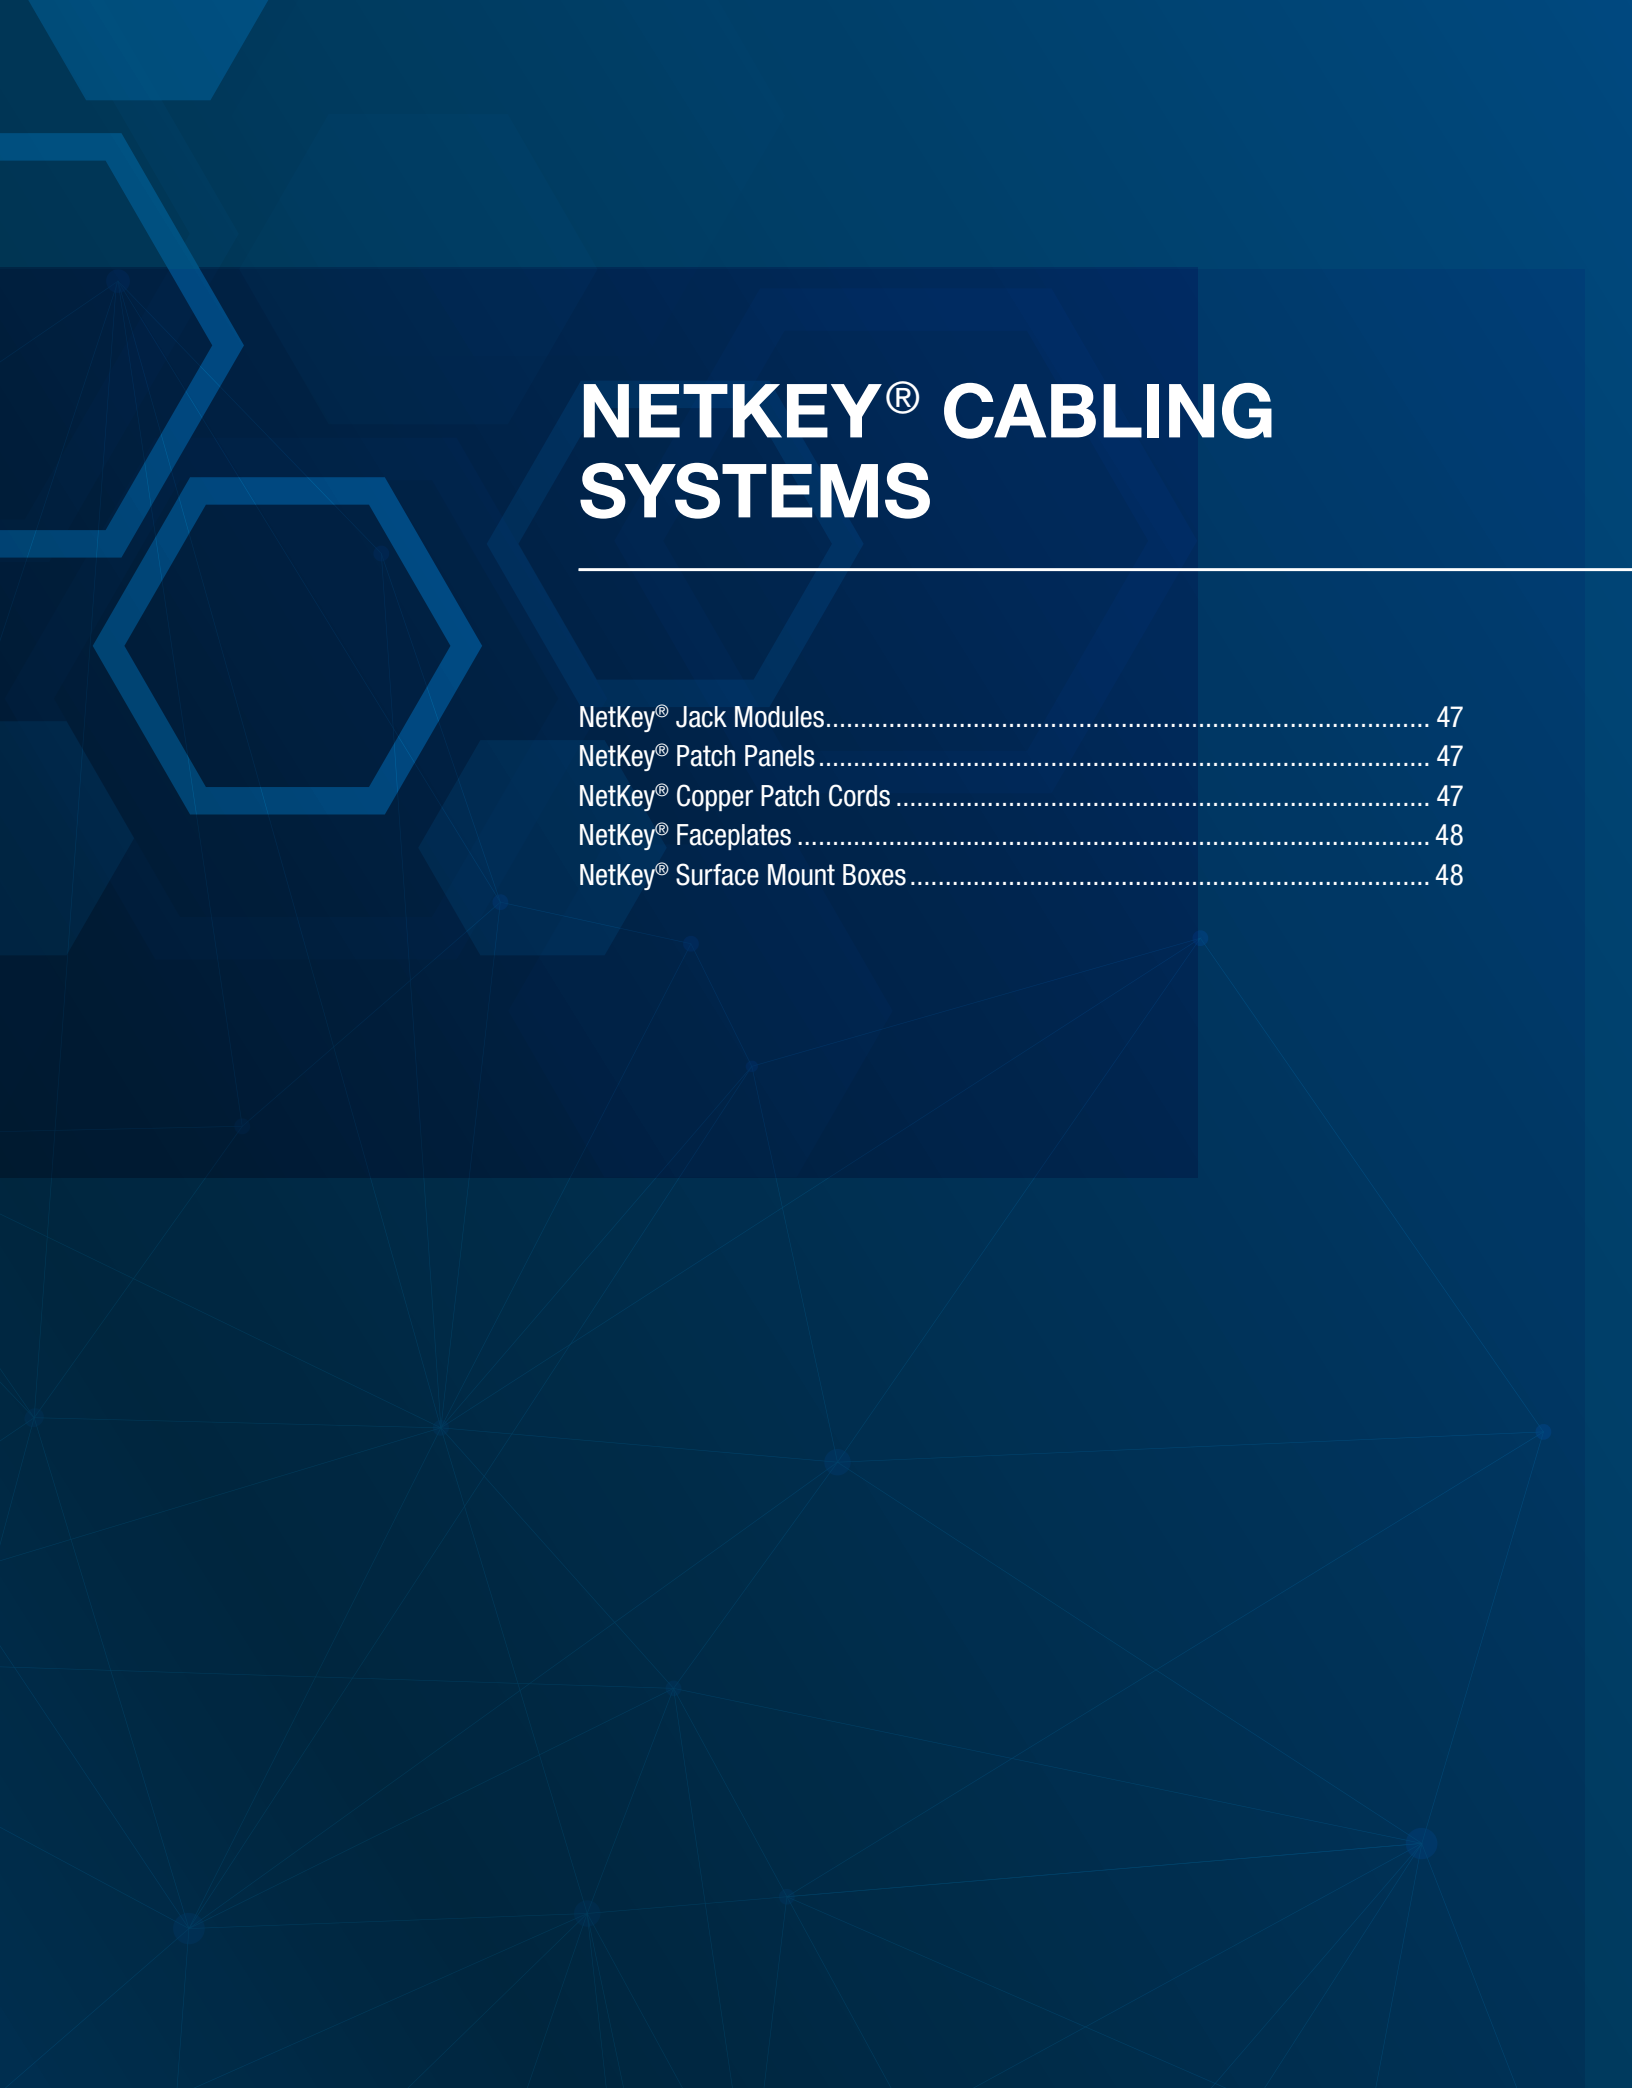

NETKEY® CABLING SYSTEMS

NetKey® Jack Modules.....	47
NetKey® Patch Panels	47
NetKey® Copper Patch Cords	47
NetKey® Faceplates	48
NetKey® Surface Mount Boxes	48

NetKey® Jack Modules

Part number	Termination Style	Performance Level	Pieces Per Pkg.	Color	Compliance
NK688MBL	Punchdown	Category 6	1	Black	TAA
NK688MBU				Blue	
NK688MWH				White	
NK6X88MWH		Category 6A		Black	
NK6X88MBL				Blue	
NK6X88MBU				White	
NK6X88MWH		25	Black		
NK688MBL-Q			Blue		
NK688MBU-Q			White		
NK688MWH-Q			Black		
NK6X88MBL-Q			Blue		
NK6X88MBU-Q			White		



NK688MBL



NK688MBU

NetKey® Patch Panels

Part Number	Ports	Style	Identification	Desgin	No. of Rack Units	Colors
Populated Punchdown Panels						
NK6PPG24Y	24	Flat	Adhesive	Category 6	Populated Patch Panels	Black
NK6PPG48Y	48					
NK6XPPG24Y	24			Category 6A		
NK6XPPG48Y	48					
Modular Panels						
NKFP48Y	48	Flat	Adhesive	Flush Mount	2	Black
NKPP48FMY						
NKPPA48FMY		Angled		N/A		
NKPPA48HDY			Flat	Pre-numbered ports		
NKPP48FMVNSBL						



NK6PPG24Y



NK6XPPG48Y



NKFP48Y



NKPPA48HDY

NetKey® Copper Patch Cords

Part Number	Cable Type	Performance Level	AWG	Cable Dia. In. (mm)	Flammability Rating	Length ft. (m)	Color
NK6APC3BU	Unshielded	Category 6A	26	0.25 (6.35)	CM/LSZH 1	3	Blue
NK6APC5BU						5	
NK6APC7BU						7	
NK6APC10BU						10	
NK6PC3BUY		Category 6	24	0.23 (5.84)	CM	3	
NK6PC5BUY						5	
NK6PC7BUY						7	
NK6PC10BUY						10	



NK6APC3BU



NK6PC3BUY

NetKey® Faceplates

Part Number	Ports	Style	Identification	Color
NK4FNWH	4	Flat	Adhesive	White
NK4MFBL				Black
NK4FWHY			Label Pocket	White
NK4MFWH			Adhesive	
NK2FNWH	2		Label Pocket	
NK2FWHY				



NK4FNWH




NK2FNWH

NetKey® Surface Mount Boxes

Part Number	Ports	Style	Identification	Magnet	Raceway Compatibility	Color
NK2BXWH-A	2	Elongated	Adhesive	CBM-X	LD3/LDPH3 LD5/LDPH5	White



NK2BXWH-A

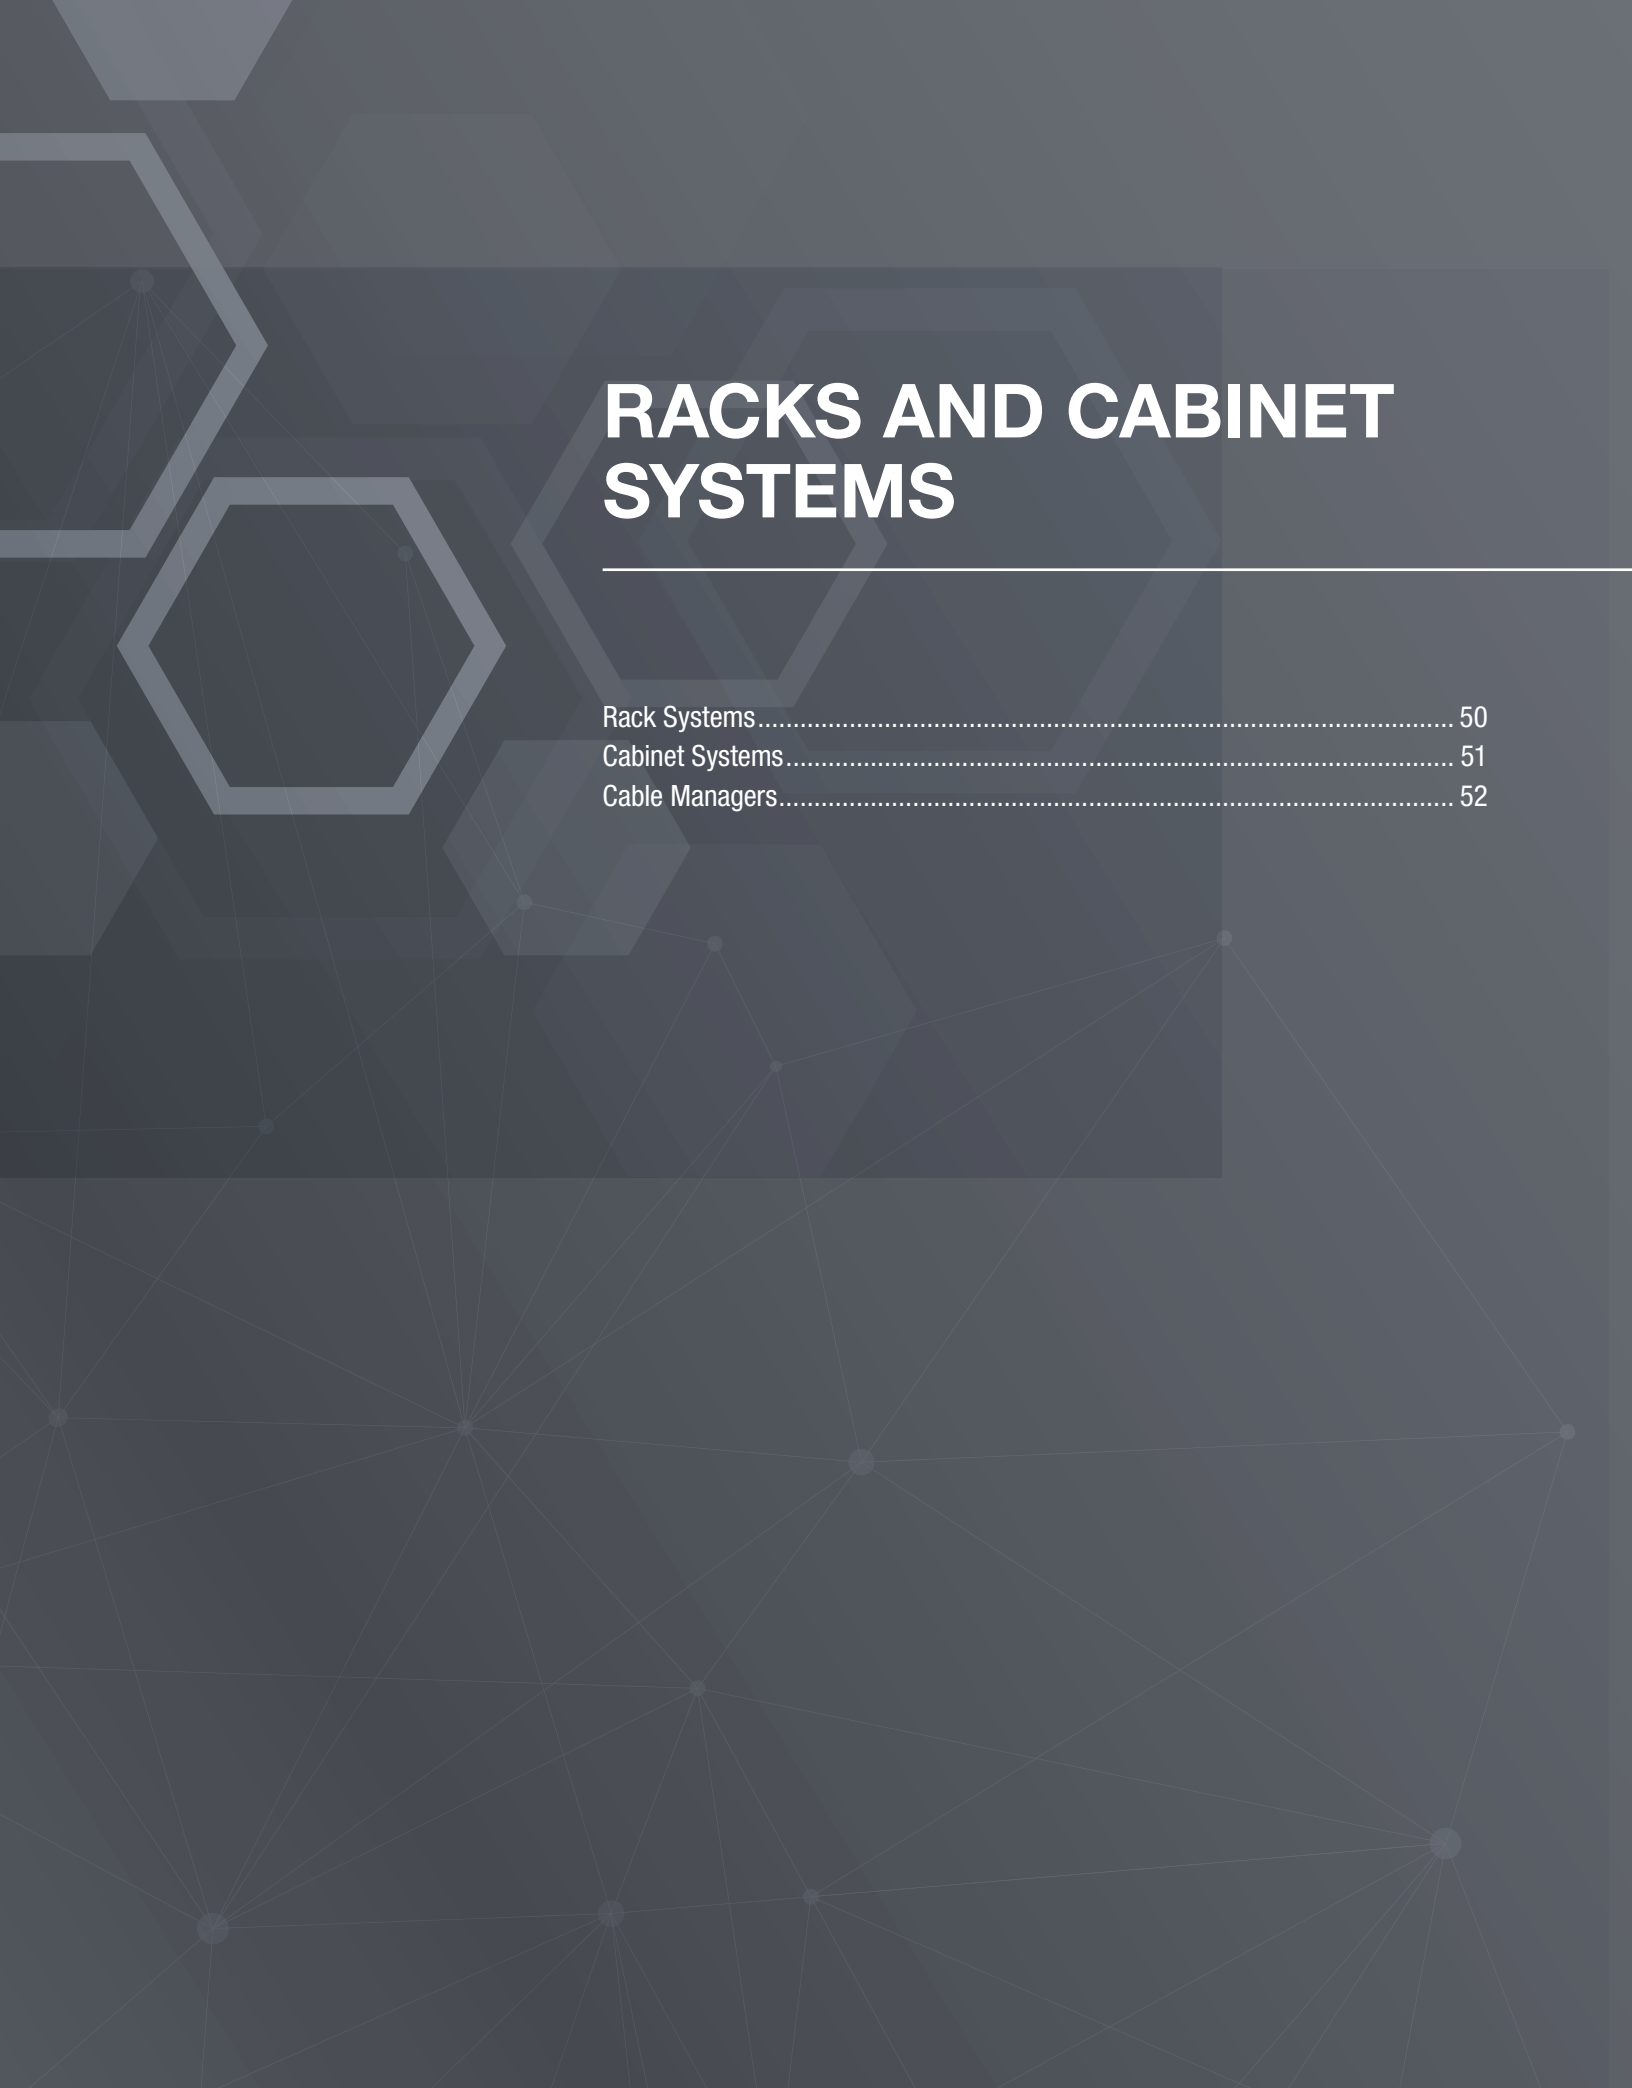

RACKS AND CABINET SYSTEMS

Rack Systems.....	50
Cabinet Systems.....	51
Cable Managers.....	52

Rack Systems

4-Post Cable Management Rack System

Part Numbers	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Equipment Rails	Load Capacity lbs.	Color
R4P	84.0 (2134)	23.3 (591)	30.0 (762)	45	#12-24 Threaded	2500	Black
R4PCN			36.0 (914)		Cage Nut		
R4P36					#12-24 Threaded		



R4P



AR4P

Adjustable Depth 4-Post Rack System

Part Numbers	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Equipment Rails	Load Capacity lbs.	Color
AR4P	84.13 (2136.9)	20.31 (515.9)	23.0 to 42.0 (584.2 to 1066.8)	45	#12-24 Threaded	2000	Black

2-Post Cable Management Rack System

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Load Capacity lbs.	Color
R2P	84.0 (2134.0)	20.3 (516.0)	3.0 (76.0)	45	1000	Black
R2P6S			6.0 (152.0)		1500	



R2P

Adjustable Wall Mount Racks

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units
AWMR9	16.8 (427.5)	20.3 (515.9)	18 (457.2), 21.5 (546.1), 25 (635)	9
AWMR12	22.4 (569.7)			12
AWMR18	33.7 (854.7)			18



AWMR9

PanZone® Overhead Distribution Rack

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Load Capacity lbs.	Materials	Color
PZLRB6U	16.0 (405)	20.3 (515)	6.4 (161)	6	80	Steel	Black



PZLRB6U

Rack Filler Panels

Part Number	Height in. (mm)	Width in. (mm)	No. of Rack Units	Color
DPFP1	1.7 (44.0)	19.0 (483)	1	Black



DPFP1

Rack Accessories

Part Number	Description	Color
WBH1	Hinged Wall Mount Bracket, 1 RU, 6.26 in. Deep	Black
R2PPDUB	2-Post PDU Bracket mounts power distribution units (PDUs) to the back of 2-Post Racks	
RSHLF	4-Post Rack mount shelf	
SRM19FM1	2-Post Rack mount shelf	
CVPDUB	4-Post PDU bracket kit vertically mounts power distribution units (PDUs) to the back of 4-Post Racks	



WBH1



R2PPDUB



RSHLF

Cabinet Systems

FlexFusion™ XGL Cabinets


Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	Cabinet Height RU
XGL64822B	90.1 (2289)	24.0 (600)	48.0 (1200)	48
XGL84822B		32.0 (800)	42.1 (1070)	
XGL84812W			48.0 (1200)	
XGL84822W		24.0 (600)	42.1 (1070)	
XGL64812W	79.6 (2022)	32.0 (800)	48.0 (1200)	42
XGL84212W		24.0 (600)	42.1 (1070)	
XGL64212B			48.0 (1200)	
XGL64822W		32.0 (800)	42.1 (1070)	
XGL64222B	90.1 (2289)	24.0 (600)	48.0 (1200)	48
XGL64812B	79.6 (2022)		42.1 (1070)	42
XGL84222B	90.1 (2289)		48.0 (1200)	48
XGL64222W	79.6 (2022)		42.1 (1070)	42
XGL84812B	90.1 (2289)	32.0 (800)	48.0 (1200)	48
XGL84222W	79.6 (2022)		42.1 (1070)	
XGL84812W	90.1 (2289)		48.0 (1200)	
XGL84212B	79.6 (2022)		42.1 (1070)	



XGL64822B



XGL84812W



CDE2



CID1RU22-23DB1

Net-Contain™ Cabinet Supported Cold Aisle/Hot Aisle Containment

Part Number	Description	Color
CDE2	Air inlet duct, 1 RU that resides in-line and below switch provides cold aisle airflow to Cisco Nexus^ N2K-C2148T-1GE, N2K-C2248TP-1GE, and N2K-C2232PP-10GE fabric extenders and Cisco^ WS-C4948E-F, WS-C4948E-F-S, and WS-C4948E-F-E. Optimized for use in server cabinet application	Black
CID1RU22-23DB1	Air inlet 1 RU duct for Cisco^ Nexus^ 9372 switch, compatible with 21.5 in. – 23.5 in. (546.1mm - 596.9mm) switch depth	
DIFBA2002S00S	Air inlet duct for Cisco^ Nexus^ 9396 switch	

Thermal Sealing Accessories

Part Number	Description	Color
CTGN6X6	CoolBoot® Cabinet Top Air Sealing Fittings used to seal off 6.5 in. x 6.5 in. (165.1mm x 165.1mm) cabinet top openings when cables are routed through the top of a cabinet. Airtight fabric and Ultra-Cinch Tie close top of fabric, minimizing hot air bypass around cables to improve cooling of network equipment and reduce energy costs. For use with 600mm, 700mm, 800mm, and 1000mm wide Net-Access Cabinets	Black
CTGN3X5	CoolBoot® Cabinet Top Air Sealing Fittings used to seal off 3.0 in. x 5.0 in. (76.2mm x 127.0mm) cabinet top openings when cables are routed through the top of a cabinet. Airtight fabric and Ultra-Cinch Tie close top of fabric, minimizing hot air bypass around cables to improve cooling of network equipment and reduce energy costs. For use with 600mm, 700mm and 800mm wide FlexFusion) and 700mm and 800mm Net-Access™ Cabinets	
C2VED07I3866B1	Net-Contain™ Vertical Exhaust Duct	



CTGN6X6



C2VED07I3866B1

Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions

Terminals

Wiring Ducts

Stronghold
Contractor
Products

Cable Managers

PatchLink™ Horizontal Cable Managers

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Color
WMP1E	3.5 (89)	19.0 (483)	8.9 (226)	2	Black
WMPSE	1.7 (44)			1	
WMPFSE					
WMPF1E	3.5 (89)		7.9 (200)		
WMPLSE	1.7 (44)				
WMPLFSE			2.7 (69)		
WMPH2E	3.5 (89)		8.9 (226)	2	
WMPHF2E			3.7 (94)		



WMP1E



WMPLSE



WMPH2E

NetManager™ High Capacity Horizontal Cable Managers

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Color
NMF1	1.7 (44)	19.0 (483)	6.2 (157)	1	Black
NMF2	3.5 (89)			2	
NM1	1.7 (44)		13.1 (332)	1	
NM2	3.5 (89)			2	
NMF1WH	1.7 (44)		6.2 (157)	1	White
NMF2WH	3.5 (89)			2	



NMF1



NM1



PR2HF1

PatchRunner™ 2 Horizontal Cable Management System

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Color
PR2HF1	1.8 (45.5)	19.0 (483)	7.9 (202)	1	Black
PR2HF1WH					White
PR2HF2	3.5 (88)			2	Black
PR2HF3	5.2 (133)			3	
PR2HF4	7.0 (177)			4	

PatchRunner® 2 Vertical Cable Management System

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Single or Dual Sided	No. of Doors Included	Color
PR2VD06	84.0 (2130)	6.0 (152)	20.6 (523)	45	Dual	2	Black
PR2VD08		8.0 (203)					
PR2VD10		10.0 (254)					
PR2VD12		12 (305)					



PR2VD08

NetRunner™ Vertical Cable Management System

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Color
WMPV22E	41.5 (1054)	4.9 (125)	12.0 (306)	22	Black
WMPV45E	83.0 (2108)		6.5 (165)	45	
WMPVHC45E		6.7 (170)	14.1 (357)		
WMPVF45E		4.9 (125)	6.5 (165)		
WMPVHCF45E		6.7 (170)	14.1 (357)		



WMPV22E



WMPVHC45E

Cable Managers

In-Cabinet Vertical Cable Managers

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Orientation	Color
CWMPV3440	70.0 (1778)	4.7 (119)	3.3 (83)	40	Front Mount	Black
CWMPV3340	71.9 (1825)	3.5 (88)	4.3 (109)		Side Mount	



CWMPV3440

PanZone® Consolidation Point Box Enclosures

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Orientation	Color
CPB24BL	20.15 (511.8)	12.15 (308.6)	1.93 (49.1)	2	Steel	Black
CPB48BL	20.15 (511.8)	12.15 (308.6)	3.74 (95)			



CPB24BL

PanZone® Consolidation Point Box Enclosures

Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	No. of Ports	Materials	Color
WME3BL	42.0 (19.05)	28.6 (12.97)	9.5 (4.31)	Enclosures	200	Steel	Black
WME6BL	42.0 (19.05)	28.6 (12.97)	14.8 (6.71)		300		
WME9BL	42.0 (19.05)	28.6 (12.97)	20.0 (9.07)		400		



WME3BL

PanZone® Basic In-Ceiling Enclosures


Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	No. of Rack Units	Load Capacity lbs.	Color
PZICEA	13.4 (341)	23.5 (597)	27.2 (692)	5	50	White



PZICEA

Cable Management Accessories

Part Number	Description	Color
PR2VFEP	Single-Sided End Panels for PR2VF Managers, 45 RU	Black



PR2VFEP

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products




POWER MANAGEMENT

Fault Managed Power System	55
Class 4 Copper Cable	55
PDU Accessories	55



PXTC1ARA



PXTM1AF



PXR1AJD



PXU1AJANNNXX

Fault Managed Power System

Part Number	Description
PXTC1ARA	FMPS Class 4 Transmitter Chassis 4.8KW, 3 PSU IN, 9 Transmitter Module OUT
PXTM1AF	FMPS Class 4 Transmitter Module 600W
PXR1AJD	FMPS Class 4 Receiver 1.6KW, 48VDC, 3 Input, 3 Output
PXR1AJF	FMPS Class 4 Receiver 1.6KW, 56VDC, 3 Input, 3 Output
PXU1AJANNNXX	FMPS Class 4 Power Supply Unit 1.6 KW, AC, C19, Input
PXM1ARGRBL	Mini-Com® Power Connector Module, Green Connector in Black Module



PXM1ARGRBL

Class 4 Copper Cable

Part Number	Flame Rating	Performance Level	AWG	Nominal Cable Diameter in. (mm)	LP Rating	Packaging ft. (m)	Color
PXUP316ABU-UQ	Plenum	UL 1400-2 Class 4	3x16	0.366 (9.3)	CMP, CL4P	2000 (610) reel	Blue
PXUP316ABL-UQ							Black
PXUP316ARD-UQ							Red
PXUP316AIG-UQ							International Gray
PXUP316AGR-UQ							Green
PXUP316AOR-UQ							Orange
PXUP316AWH-UQ							White
PXUP316AYL-UQ							Yellow
PXUP316AVL-UQ							Violet




PXUP316ABU-UQ

PDU Accessories

Part Number	Description
ACF20	SmartZone Security Handle to G5 iPDU Harness (JST to RJ45 Male)



ACF20

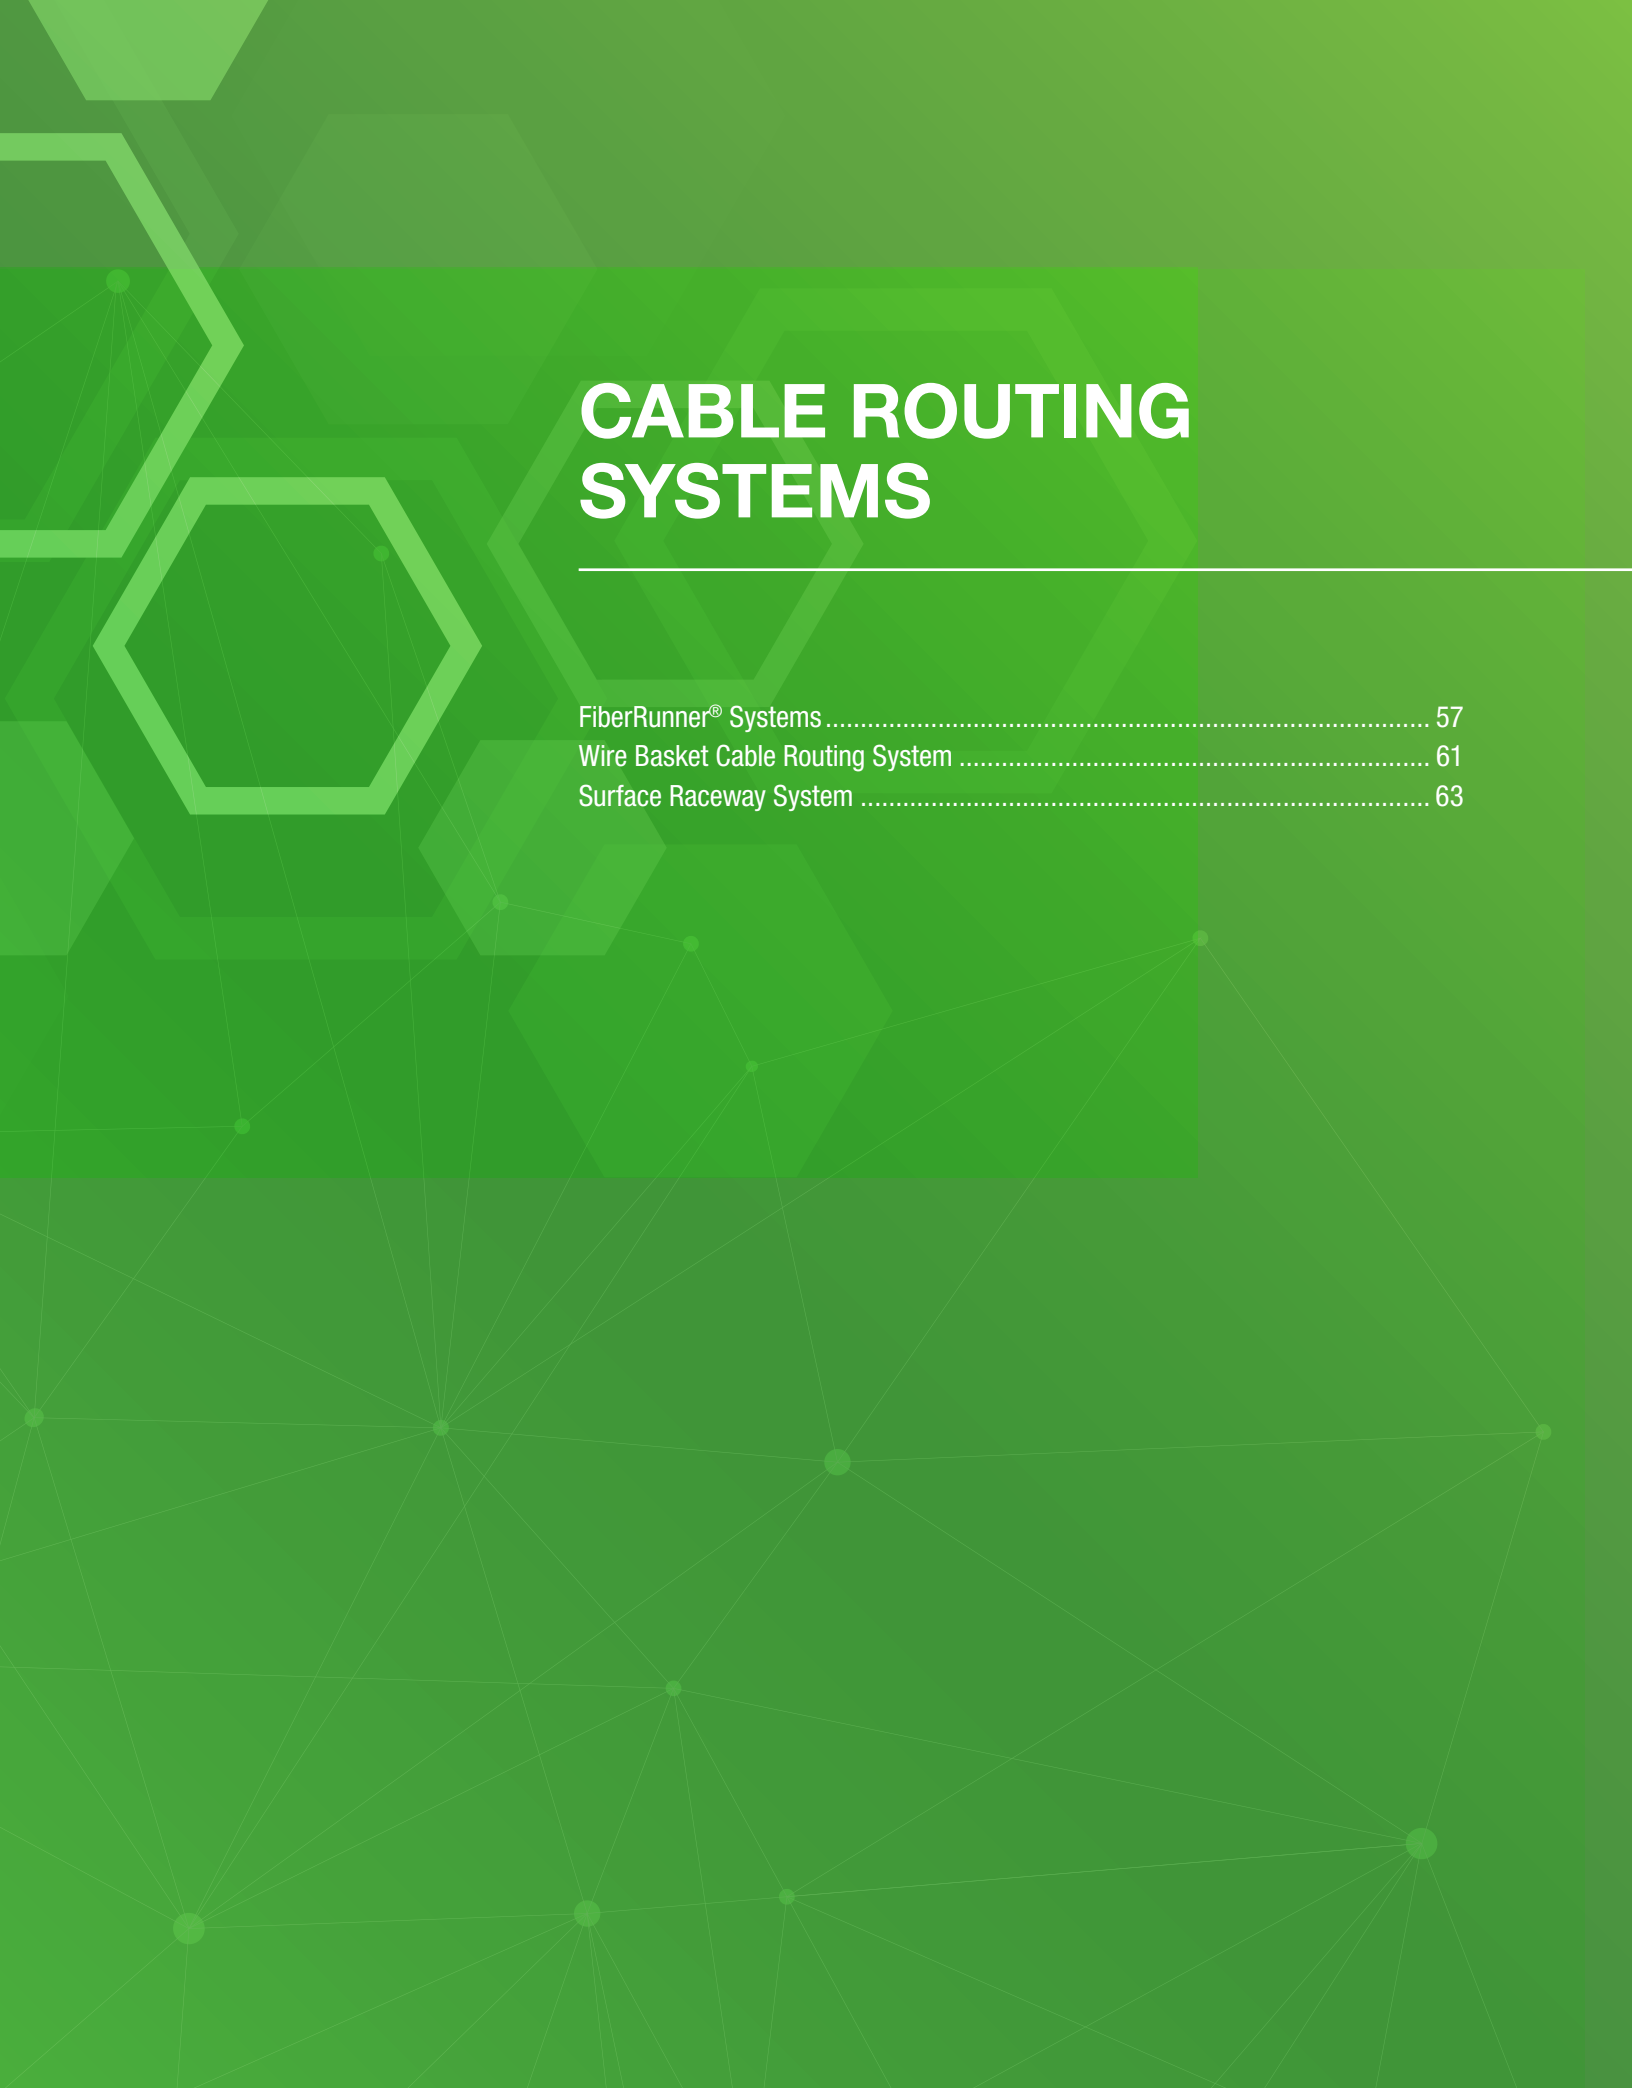

CABLE ROUTING SYSTEMS

FiberRunner® Systems	57
Wire Basket Cable Routing System	61
Surface Raceway System	63

FiberRunner® Systems

12x4 FiberRunner System

Part Number	Description	Couplers Required	Color
12x4 FiberRunner System Fittings			
FRFWC12X4LYL	12x4 4-Way Cross Fitting	—	Yellow
FRT12X4LYL	12x4 Horizontal Tee Fitting	(3 pcs.) FRBC12X4L**	
FREC12X4LYL	12x4 End Cap Fitting	—	
FRRA12X4LYL	12x4 Horizontal 90° Angle Fitting	(2 pcs.) FRBC12X4L**	
FRT12X4W6LYL	12x4 Horizontal Tee with 6x4 Exits	(2 pcs.) FRBC12X4L** (1 pc.) FRBC6X4L**	
FR12X4YL10	12x4 Channel, 10 ft.	—	
FRBC12X4LYL	12x4 QuikLock Coupler	—	



FR12X4YL10



FRVT12X4LYL



FRBC12X4LYL

12x4 FiberRunner System Spillouts

FRVT12X4LYL	12x4 Vertical Tee	(2 pcs.) FRBC12X4L** (1 pc.) FRBC6X4L**	Yellow
FRTR12X4LYL	3-Sided BRC Trumpet Spillout for 12x4 Exit	(1 pc.) FRBC12X4L**	
FRSPJ2X2LYL	Spill-Over Junction with 2x2 Exit for Fiber Channel	—	

12x4 FiberRunner QuikLock™ Coupler

FRBC12X4LYL	Coupler quickly joins two sections of channel and/or fittings	—	Yellow
--------------------	---	---	--------

12x4 FiberRunner Mounting Brackets

		Threaded Rod Size in. (mm)	
Part Number	Description		Color
FR12TRBN58	12x4 New Threaded Rod QuikLock Bracket	0.625	—
FR12ACB12N	12 x4 Top Support Adjustable “C” QuikLock Bracket	0.5	
FR12ACAB	12x4 Adjustable Cabinet Bracket		
FR12TRBE58	12x4 Existing Threaded Rod QuikLock Bracket	0.625	Black
FR12ACB58N	12x4 Top Support Adjustable “C” QuikLock Bracket		
FR12TB12N	12x4 Trapeze QuikLock Bracket	0.5	—



FR12TRBN58

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

FiberRunner® Systems, continued

6x4 and 4X4 FiberRunner Systems

Part Number	Description	Couplers Required	Color	
6x4 FiberRunner System Fittings				
FREC6X4LYL	6x4 End Cap Fitting	—	Yellow	
FRT6X4LYL	6x4 Horizontal Tee Fitting	(3 pcs.) FRBC6X4L**		
FRTSC6LYL	Split Cover for 6x4 Horizontal Tee Fitting	—		
FROVRA6X4LYL	6x4 Outside Vertical 90° Angle Fitting	(2 pcs.) FRBC6X4L**		
FRRRA6X4LYL	6x4 Horizontal 90° Angle Fitting			
FRRASC6LYL	Split Cover for 6x4 Horizontal 90° Angle Fitting	—		
FR6X4BL10	6x4 Channel, 10 ft.			Black
FR6X4YL10				Yellow

6x4 FiberRunner System Spillouts

FRVT6X4LYL	6x4 Vertical Tee	2 (pcs.) FRBC6X4L**	Yellow
FRTR6X4LYL	3-Sided BRC Trumpet Spillout for 6x4 Exit	(1 pc.) FRBC6X4L**	
FRSPJC46LYL	Cover for Spill-Over Junction with 4x4 Exit for 6x4	—	

6x4 FiberRunner QuikLock™ Coupler

FRBC6X4LYL	Coupler quickly joins two sections of channel and/or fittings	—	Yellow
-------------------	---	---	--------

4x4 FiberRunner System Fittings

FRT4X4LYL	4x4 Horizontal Tee Fitting	(3 pcs.) FRBC4X4L**	Yellow
FRVT4X4LYL	4x4 Vertical Tee Spillout	(2 pcs.) FRBC4X4L**	
FRRRA4X4LYL	4x4 Horizontal 90° Angle Fitting		
FREC4X4LYL	4x4 End Cap Fitting	—	
FRT4X4LYL	4x4 Horizontal Tee Fitting		
FRSHC4YL6	4x4 Split Hinged Snap-On Channel Cover		
S4X4YL6NM	4x4 Solid Wall Channel, 6 ft.		
FR4X4YL10	4x4 Channel,10 ft.		
E4X4YL6	4x4 Channel, 6 ft.		

4x4 FiberRunner System Spillouts

FRIDT4X4LYL	2-Port Spillout to 1.5 In. (38mm) Inside Diameter Corrugated Tubing	(1 pc.) FRBC4X4L**	Yellow
FTR4X4LYL	3-Sided Vertical Tee Trumpet Spillout	—	
FRTR4X4LYL	3-Sided BRC Trumpet Spillout for 4x4 Exit	(1 pc.) FRBC4X4L**	
FRSPJ4X4LYL	Spill-Over Junction with 4X4 Exit for Fiber Channel	—	

4x4 FiberRunner QuikLock™ Coupler

FRBC4X4LYL	Coupler quickly joins two sections of channel and/or fittings	—	Yellow
-------------------	---	---	--------



FREC6X4LYL



FRVT6X4LYL



FRBC6X4LYL



FRT4X4LYL



FRIDT4X4LYL



FRBC4X4LYL

FiberRunner® Systems, continued

6x4 FiberRunner Mounting Brackets

Part Number	Description	Threaded Rod Size in. (mm)	Color
FR6ACB12N	Top Support Adjustable "C" QuikLock Bracket	0.5 (12)	Black
FR6ACB58N	6x4/4x4 Adjustable C Bracket	0.625	
FR6TRBE12	Existing Threaded Rod QuikLock Bracket	0.5	
FR6ALB	Adjustable Ladder Bracket	—	
FR6TRBN12N	Threaded Rod QuikLock Bracket	0.5	
FR6TRBN58N	Top Support Adjustable "C" QuikLock Bracket	0.625	



FR6ACB12N

2x2 FiberRunner System

Part Number	Description	Couplers Required	Color
-------------	-------------	-------------------	-------

2x2 FiberRunner System Fittings

FRA2X2LYL	2x2 Horizontal 90° Angle Fitting	(2 pcs.) FBC2X2L**	Yellow
FT2X2LYL	2x2 Horizontal Tee Fitting	(3 pcs.) FRBC2X2L**	
HC2YL10	2x2 Cover, Hinged, Snap-On	—	
HS2X2YL10NM	2x2 Hinged Channel	—	



FRA2X2LYL

2x2 FiberRunner System Spillouts

FVTHD2X2LYL	2x2 Vertical Tee Spillout	(2 pcs.) FBC2X2L **	Yellow
FTR2X2LYL	3-Sided BRC Trumpet Spillout for 2x2 Exit	(1 pc.) FBC2X2L **	
FIDT2X2LYL	1-Port Spillout to 1.5 In. (38mm) Inside Diameter Corrugated Tubing		
FRHC12YL10	12x4 Snap-On Hinged Cover, 10 ft.	—	
FRHC6YL10	6x4 Snap-On Hinged Cover, 10 ft.		



FVTHD2X2LYL

2x2 FiberRunner QuikLock™ Coupler

FBC2X2LYL	Coupler quickly joins two sections of hinged channel and/or fittings	—	Yellow
-----------	--	---	--------



FBC2X2LYL

FiberRunner Brackets and Accessories

Part Number	Description	Threaded Rod Size in.	Color
FLRB	Ladder Rack Bracket	—	—
FZBA1.5X4	Adjustable "Z" Bracket		Black
FTRBN12N	2x2 Threaded Rod Bracket	0.5	—
FR1.5IDELYL	1-Port Spillout Side Exit to 1.5 in. (38mm) Inside Diameter Corrugated Tubing	—	Yellow



FLRB

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Wire Basket Cable Routing System

Wire Basket Overhead Cable Tray Routing System


Part Number	Height in. (mm)	Width in. (mm)	Depth in. (mm)	Weight lbs. (kg)	Color
PWB4X4BL	4.43 (112.4)	4.63 (117.7)	118.33 (3005.6)	10.0 (4.581)	Black Powder Coated
PWB4X4EZ					Electro Zinc
PWB2X6BL	6.43 (163.2)	6.63 (168.4)		10.8 (4.899)	Black Powder Coated
PWB4X6BL	4.43 (112.4)			14.5 (6.577)	Electro Zinc
PWB4X6EZ					Black Powder Coated
PWB6X6BL	6.43 (163.2)			18.5 (8.391)	Black Powder Coated
PWB6X6EZ	Electro Zinc				
PWB4X8BL	4.43 (112.4)	8.63 (219.3)		15.2 (6.895)	Black Powder Coated
PWB4X8EZ					Electro Zinc
PWB2X12BL	2.43 (61.6)	12.63 (320.9)		14.1 (6.396)	Black Powder Coated
PWB2X12EZ	Electro Zinc				
PWB4X12BL	4.43 (112.4)			17.9 (8.119)	Black Powder Coated
PWB4X12EZ					Electro Zinc
PWB2X18BL	2.43 (61.6)	18.63 (473.3)		17.3 (7.847)	Black Powder Coated
PWB2X18EZ					Electro Zinc
PWB4X18BL	4.43 (112.4)			21.2 (9.616)	Black Powder Coated
PWB4X18EZ					
PWB2X24BL	2.43 (61.6)			24.63 (625.7)	20.6 (9.344)
PWB2X24EZ		Electro Zinc			
PWB4X24BL	4.43 (112.4)	24.5 (11.113)			Black Powder Coated
PWB4X24EZ					Electro Zinc



PWB4X4BL



PWB6X6EZ



PWB2X18EZ

Wire Basket Cable Routing System, continued

Wire Basket Formed Tee Intersections

Part Number	Description	Height in. (mm)	Width in. (mm)	Color
PWBPF2X4BL	Formed Tee Fitting	2.0 (50.8)	4.0 (101.6)	Black Powder Coated
PWBPF2X4EZ				Electro Zinc
PWBPF2X6BL			6.0 (152.4)	Black Powder Coated
PWBPF2X6EZ				Electro Zinc
PWBPF2X8BL			8.0 (203.2)	Black Powder Coated
PWBPF2X8EZ				Electro Zinc
PWBPF2X12BL			12.0 (304.8)	Black Powder Coated
PWBPF2X12EZ				Electro Zinc
PWBPF2X18BL			18.0 (457.2)	Black Powder Coated
PWBPF2X18EZ				Electro Zinc
PWBPF2X24BL			24.0 (609.6)	Black Powder Coated
PWBPF2X24EZ				Electro Zinc
PWBPF4X4BL		4.0 (101.6)	4.0 (101.6)	Black Powder Coated
PWBPF4X4EZ				Electro Zinc
PWBPF4X6BL			6.0 (152.4)	Black Powder Coated
PWBPF4X6EZ				Electro Zinc
PWBPF4X8BL			8.0 (203.2)	Black Powder Coated
PWBPF4X8EZ				Electro Zinc
PWBPF4X12BL			12.0 (304.8)	Black Powder Coated
PWBPF4X12EZ				Electro Zinc
PWBPF4X18BL			18.0 (457.2)	Black Powder Coated
PWBPF4X18EZ				Electro Zinc
PWBPF4X24BL			24.0 (609.6)	Black Powder Coated
PWBPF4X24EZ				Electro Zinc
PWBPF6X6BL		6.0 (152.4)	6.0 (152.4)	Black Powder Coated
PWBPF6X6EZ				Electro Zinc
PWBPF6X8BL			8.0 (203.2)	Black Powder Coated
PWBPF6X8EZ				Electro Zinc
PWBPF6X12BL			12.0 (304.8)	Black Powder Coated
PWBPF6X12EZ				Electro Zinc
PWBPF6X18BL			18.0 (457.2)	Black Powder Coated
PWBPF6X18EZ				Electro Zinc
PWBPF6X24BL			24.0 (609.6)	Black Powder Coated
PWBPF6X24EZ				Electro Zinc



Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions

Terminals

Wiring Ducts

Stronghold
Contractor
Products

Wire Basket Cable Routing System, continued

Wire Basket Spillover

Part Numbers	Description	Exit Width in. (mm)	Color
PWBSPJ2BL	Wire Basket Spillover Exit	2.0 (50.8)	Black
PWBSPJ4BL		4.0 (101.6)	



PWBSPJ2BL

Pan-Way® LD Surface Raceway System

Part Number	Profile	Length ft. (m)	Color
-------------	---------	----------------	-------

LD Profile Raceway Channels

LD3IW6-A	LD3	6.0 (152.4)	Off White
LD3WH6-A			White
LD3WH8-A		8.0 (203.2)	
LD5BL6-A	LD5	6.0 (152.4)	Black
LD5EI6-A			Electric Ivory
LD5WH6-A			White
LD5EI8-A		8.0 (203.2)	Electric Ivory
LD5WH8-A			White
LD5IW10-A		10.0 (245.0)	Off White
LD5WH10-A			White
LD5IW8-A	LD10	8.0 (203.2)	Off White
LD5IW6-A		6.0 (152.4)	Off White
LD10EI6-A			Electric Ivory
LD10WH6-A			White
LD10IW6-A		8.0 (203.2)	Off White
LD10EI8-A			Electric Ivory
LD10WH8-A			White
LD10IW8-A			Off White
LD10IW10-A		10.0 (245.0)	Off White
LD10WH10-A			White



LD3IW6-A



LD10WH6-A



ECF10WH-X



RAF3WH-E



DCF10IW-X

LD Profile Fittings

ECF10WH-X	End cap LD10	—	White
OCF10WH-X	Outside Corner LD3/LD5		
RAF3WH-E	Right angle		
RAF10IW-X			
CF3WH-E	Coupler LD3/LD5		Off White
DCF10IW-X	Drop ceiling/entrance end		White
			Off White

Pan-Way® LDPH Surface Raceway System

Part Number	Profile	Length ft. (m)	Color
-------------	---------	----------------	-------

LDPH Profile Channels

LDPH3IW6-A	LDPH3	6.0 (152.4)	Off White
LDPH5WH8-A	LDPH5	8.0 (203.2)	White
LDPH5IW8-A			Off White
LDPH10IW8-A	LDPH10		



LDPH3IW6-A

Wire Basket Cable Routing System, continued

Pan-Way® Junction Boxes

Part Number	Description	Voltage Rating	Depth in. (mm)	Color
JBX3510WH-A	Single gang low voltage two-piece snap together outlet box with adhesi	Low Voltage	1.62 (41.15)	White
JBX3510IW-A	Single gang low voltage two-piece snap together outlet box with adhesi			Off White
JB1IW-A	Single gang low voltage one-piece outlet box with adhesive		1.75 (44.45)	Off White
JB1DWH-A	Single gang low voltage one-piece outlet box with adhesive, deep		2.75 (69.85)	White
JB1DIW-A	Single gang low voltage one-piece outlet box with adhesive, deep	Power Rated		Off White
JBP1DIW	Double gang two-piece screw together outlet box, deep			White
JBP2DWH	Double gang two-piece screw together outlet box, deep			Off White
JBP2DIW	Double gang two-piece screw together outlet box, deep			




JBX3510WH-A



JBP1DIW



AFR4BCBL6



AFR4CCBL



T70BIW8



T70CIW8



T70ICIW



T45BIW10

Above Floor Raceway

Part Number	Profile	Length ft. (m)	Color
AFR4BCBL6	Base and cover	6.0 (152.4)	Black
AFR4ECBL	End cap fitting	—	
AFR4CCBL	Coupler fitting		
AFR4TBLGBL	Table leg transition fitting		
AFR4JB2SBL	Power rated two-piece snap together junction box		
AFR4RABL	Right angle fitting		
AFR4WTRBL	Wall transition fitting		

Surface Raceway System

Pan-Way® T-70 Surface Raceway System

Part Number	Profile	Length ft. (m)	Color
T-70 Profile Channels			
T70BIW8	Base	8.0 (203.2)	Off White
T70BIW10		10.0 (245.0)	
T70CIW8	Cover	8.0 (203.2)	
T70CIW10		10.0 (245.0)	
T-70 Profile Fittings			
T70ICIW	Inside corner fitting	—	Off White
T70TIW	Tee fitting	—	

Pan-Way® T-45 Surface Raceway System

Part Number	Profile	Length ft. (m)	Color
T-45 Profile Channels			
T45BIW10	Base	10.0 (245.0)	Off White

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors


Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

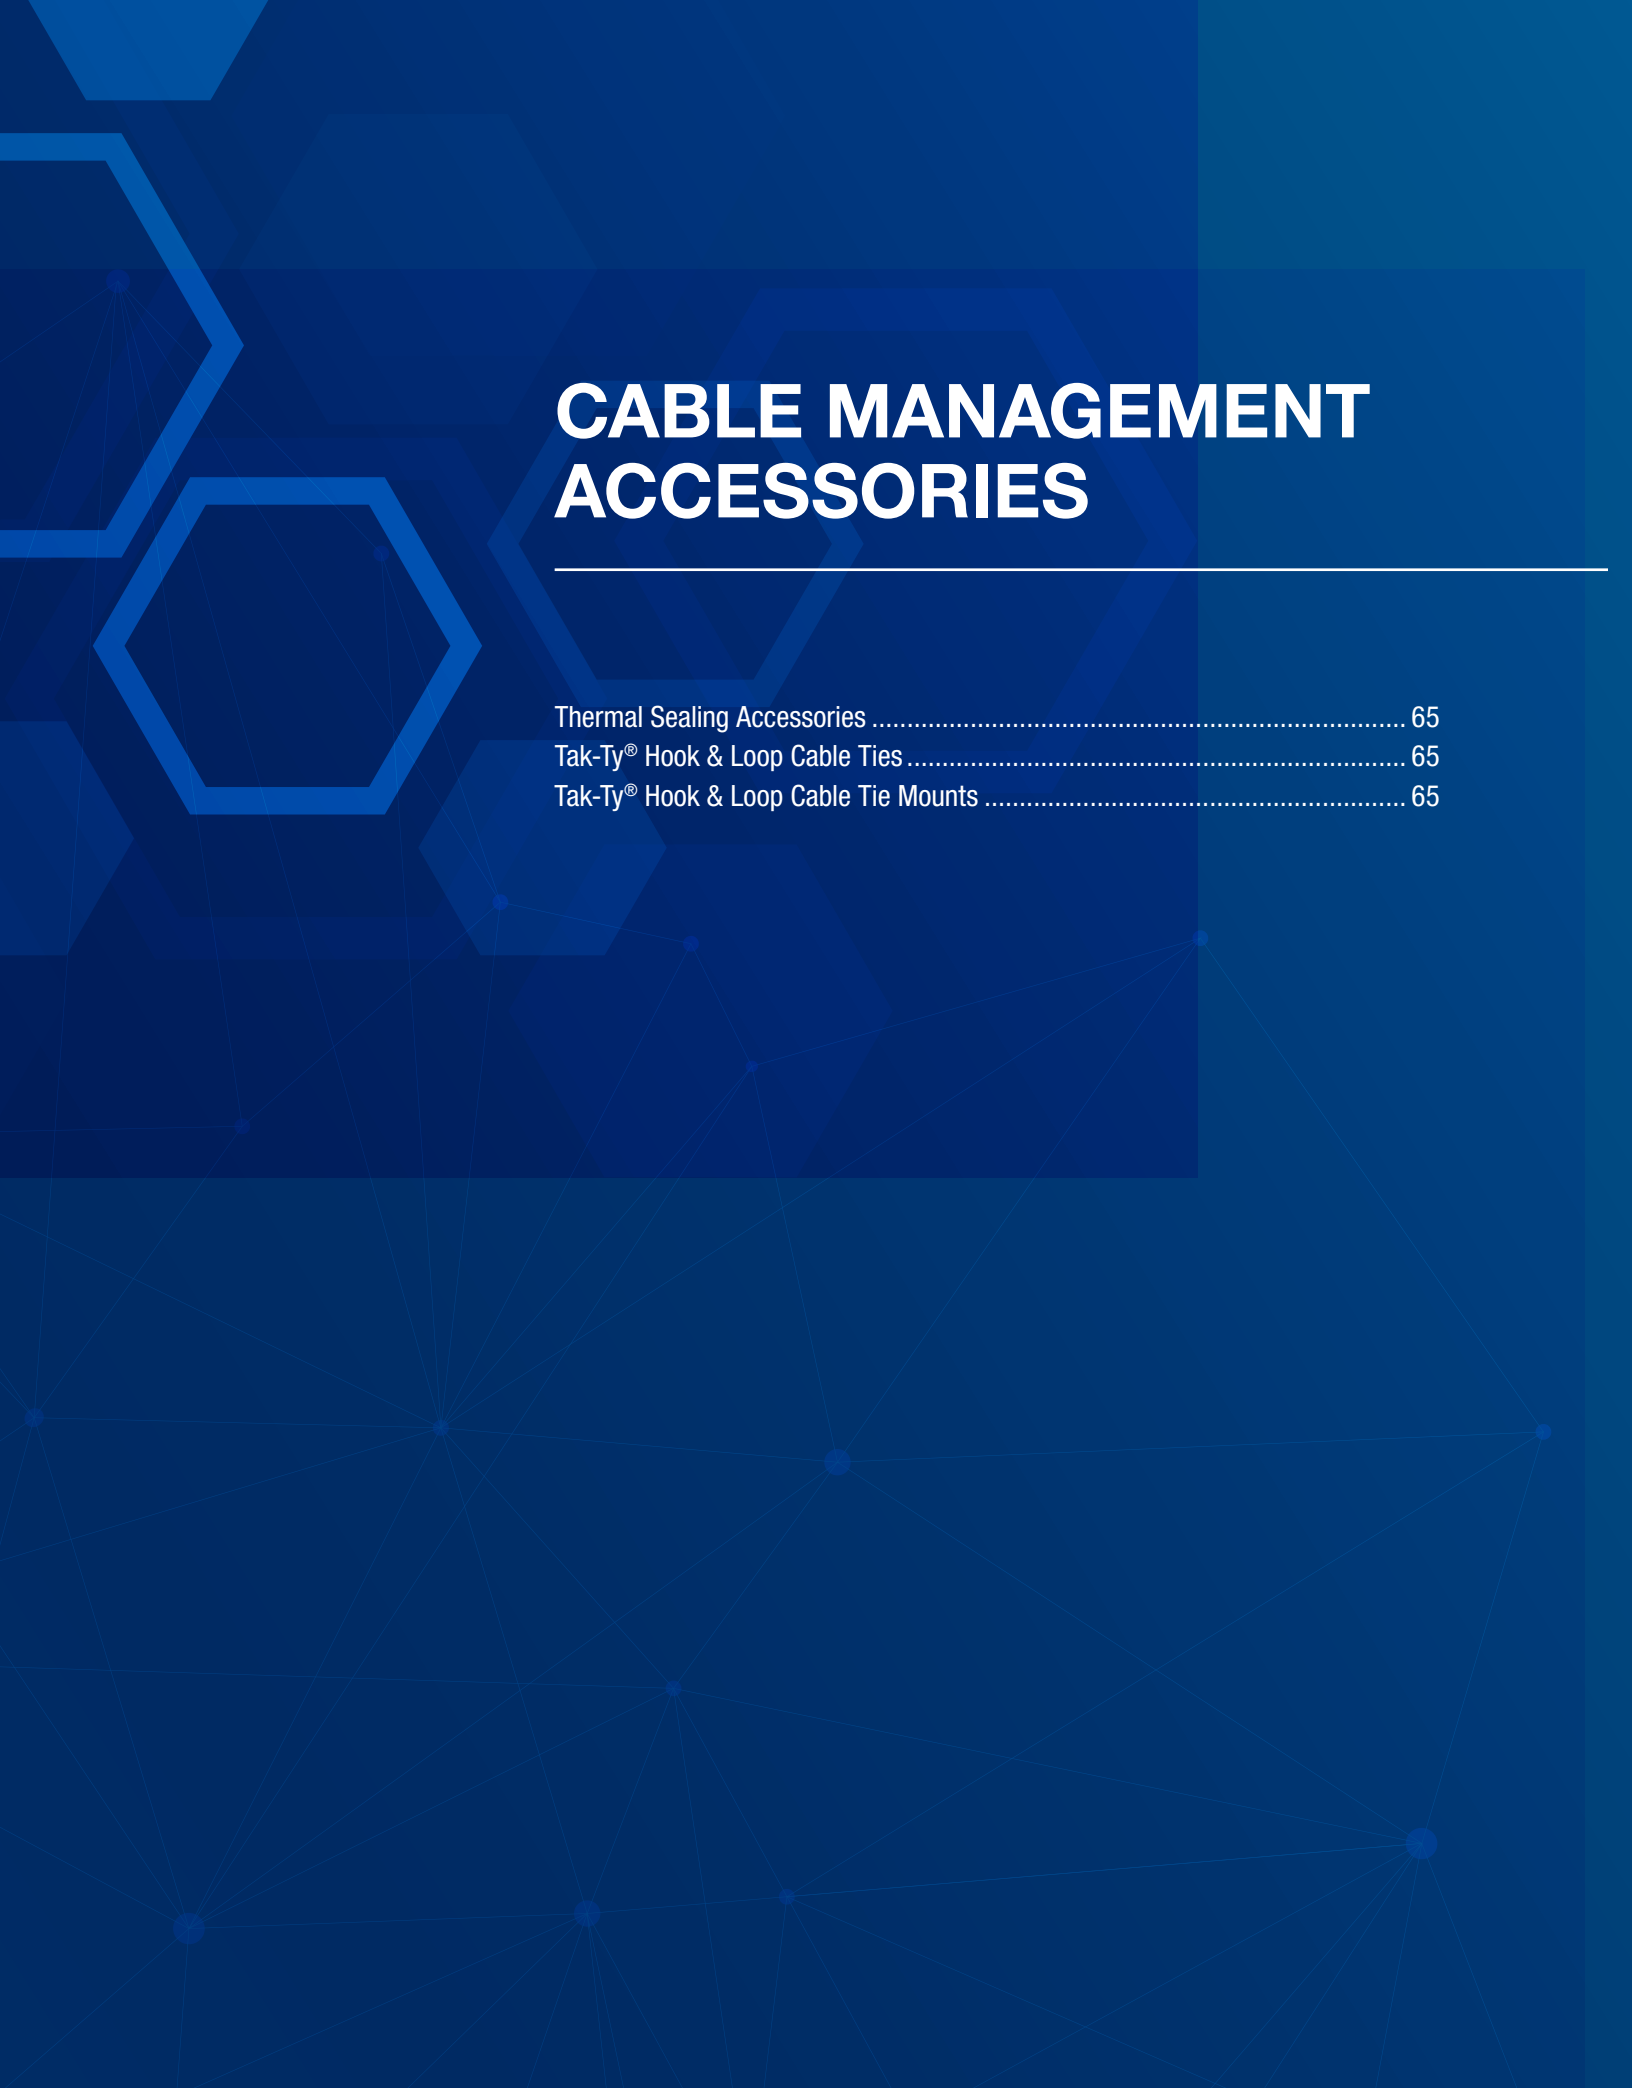

CABLE MANAGEMENT ACCESSORIES

Thermal Sealing Accessories	65
Tak-Ty® Hook & Loop Cable Ties	65
Tak-Ty® Hook & Loop Cable Tie Mounts	65

Thermal Sealing Accessories

Part Number	Description	Color
-------------	-------------	-------

Blanking Shades

FLBSIM-51	Full-length blanking shade blanks out 1 – 52 consecutive rack units on standard 19 in. (482.6mm) wide vertical mounting rails	Black
------------------	---	-------

Tool-Less Blanking Panels

TLBP1S-V	1 RU tool-less blanking panel, square hole 19 in. (483mm) width for 3/8 in. cage nut holes (may be used with or without cage nuts installed)	Black
TLBP2S-V	2 RU tool-less blanking panel, square hole 19 in. (483mm) width for 3/8 in. cage nut holes (may be used with or without cage nuts installed)	

CoolBoot® Raised Floor Air Sealing Grommets - Integral Mount

RFG6X8Y	Overall size of 6 in. x 8 in. (152.4mm x 203.2mm) Dia. allows for 4.2 in. x 6.2 in. (106.7mm x 157.5mm) Dia. capacity	Navy Blue
----------------	---	-----------

CoolBoot® Raised Floor Air Sealing Grommets - Surface Mount

RFG8X8SMY	Overall size of 8 in. x 8 in. (203.2mm x 203.2mm) Dia. allows for 6.2 in. x 6.2 in. (157.5mm x 157.5mm) Dia. capacity	Navy Blue
------------------	---	-----------



FLBSIM-51



TLBP1S-V



RFG6X8Y

RFG8X8SMY

Tak-Ty® Hook & Loop Cable Ties

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (kg)
-------------	-----------------	----------------	---------------------------	--------------------------------------

Tak-Ty 15 ft. and 75 ft. Continuous Rolls – Can be cut to desired length, eliminating waste

HLM-15R0	15.0 (4.6)	15.0 (4.6)	Various	18.0 (80.0)
HLS-75R0	75.0 (22.9)	0.8 (19.1)		50.0 (222.0)
HLS-15R0	15.0 (4.6)			18.0 (80.0)

Tak-Ty Loop Ties – Slot allows for pre-wrapping of bundles

HLT2I-X0	8.0 (203.0)	0.5 (12.7)	1.9 (49.0)	40.0 (178.0)
HLT3I-X0	12.0 (305.0)		3.2 (81.0)	

Tak-Ty Stacked Strip Ties – Eliminates cutting ties to length and staging them for each job Rounded edges for installer safety – 100 pieces

HLB2S-C0	7.0 (178.0)	0.8 (19.1)	1.6 (41.0)	50.0 (222.0)
HLTP3I-X0	12.0 (305.0)	0.5 (12.7)	3.2 (81.0)	40.0 (178.0)

Ultra-Cinch™ Cinch Ties with Brass Grommet

UGCTC3S-X0	12.0 (305.0)	0.85 (21.6)	3.0 (76.2)	50 (222)
-------------------	--------------	-------------	------------	----------



HLM-15R0



HLT2I-X0



HLB2S-C0



UGCTC3S-X0



ABMT-A-C



ABMT-S6-C

Tak-Ty® Hook & Loop Cable Tie Mounts

Part Number	Mounting Method	Material	Color
ABMT-A-C	Pre-installed Rubber Adhesive	Nylon 6.6	Natural
ABMT-A-Q20			Black
ABMT-S6-C	#6 (M3) Screw		Natural
ABMT-S6-C20			Black
ABMT-A-C20			

Tak-Tape™ Hook & Loop Cable Tie Rolls

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (kg)
TTR-20R0	20.0 (6.1)	0.8 (19.1)	Various	40 (178)
TTR-35R3-0	35.0 (10.7)			
TTR-35RX0				

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

ABRASION PROTECTION

Pan-Wrap™ Split Harness Wrap.....	67
Spiral Wrap.....	67
Grommet Edging.....	68
HSTT Heat Shrink Pieces and Reels.....	70
HSTTA Heat Shrink Pieces.....	70
HST Thick Wall Heat Shrink.....	70
Corrugated Loom Tubing.....	71
Braided Expandable Sleeving.....	72
Braided Sleeving.....	73
Insulating Fiberglass Tubing.....	73
Duct Sealing Compounds.....	73

Pan-Wrap™ Split Harness Wrap

Part Number	Material	Length Per Reel ft. (m)	Bundle Diameter Range in. (mm)	Outside Diameter in. (mm)	Temperature Range	Wall Thicknes in. (mm)	Color	Std Pkg Qty
PW100F-C20	Polyethylene	100 (30.5)	1.13 (28.6)	0.81 (20.6)	-40°F to 122°F (-40°C to 50°C)	1.00 (25.4)	Black	1
PW100FR-C20Y	Flame Retardant Polyethylene				-4°F to 122°F (-20°C to 50°C)			
PW50F-T	Polyethylene	200 (61.0)	0.55 (14.0)	0.43 (10.9)	-40°F to 122°F (-40°C to 50°C)	0.50 (12.7)	Natural	
PW75F-C		100 (30.5)	0.81 (20.6)	0.55 (14.0)		0.75 (19.1)		
PW50F-T20		200 (61.0)	0.55 (14.0)	0.43 (10.9)		0.50 (12.7)	Black	
PW75F-C20		100 (30.5)	0.81 (20.6)	0.55 (14.0)		0.75 (19.1)		




PW100F-C20

Spiral Wrap

Part Number	Material	Length Per Reel ft. (m)	Bundle Diameter Range in. (mm)	Outside Diameter in. (mm)	Temperature Range	Wall Thickness in. (mm)	Color	Std Pkg Qty		
T12T-C	TFE Polytetrafluorethylene	100 (30.5)	1/16 – 1/2 (1.6 – 12.7)	0.12 (3.2)	-454°F to 356°F (-270°C to 180°C)	0.020 (0.51)	Natural	1		
T25F-M	Polyethylene	1000 (304.8)	3/16 – 2 (4.8 – 50.8)	0.25 (6.4)	-40°F to 122°F (-40°C to 50°C)	0.040 (1.02)				
T25R-CY	Fire Resistant Polyethylene	100 (30.5)								
T25N-C	Nylon 6.6	50 (15.2)			-454°F – 356°F (-270°C – 180°C)	0.030 (0.76)				
T25T-L	Weather Resistant TFE Polytetrafluorethylene	100 (30.5)								
T38F-C	Polyethylene	250 (76.2)	5/16 – 3 (7.9 – 76.2)	0.38 (9.5)	-40°F to 122°F (-40°C to 50°C)	0.055 (1.40)	Black			
T38F-TL	Polyethylene	100 (30.5)								
T38FR-C20Y	Flame Retardant Polyethylene	50 (15.2)			-454°F to 356°F (-270°C to 180°C)	0.030 (0.76)	0.055 (1.40)		Black	
T38T-L	TFE Polytetrafluorethylene	100 (30.5)								
T38F-C0	Weather Resistant Polyethylene	250 (76.2)			-40°F to 122°F (-40°C to 50°C)	0.060 (1.52)	0.030 (0.76)		Black	
T38N-TL	Nylon 6.6	100 (30.5)								
T50F-C4Y	Polyethylene	250 (76.2)	3/8 – 4 (9.5 – 101.6)	0.50 (12.7)			-40°F to 122°F (-40°C to 50°C)		0.030 (0.76)	Black
T50F-C0	Weather Resistant Polyethylene	250 (76.2)								
T38P-C0	Weather Resistant Polyethylene	100 (30.5)	3/8 – 4 (9.5 – 101.6)	0.50 (12.7)			-4°F to 122°F (-20°C to 50°C)		0.060 (1.52)	Natural
T50F-C	Polyethylene	250 (76.2)								
T50R-TLY	Fire Resistant Polyethylene	100 (30.5)	3/8 – 4 (9.5 – 101.6)	0.50 (12.7)	-454°F to 356°F (-270°C to 180°C)	0.030 (0.76)	Natural			
T50F-TL4Y	Polyethylene	250 (76.2)								
T50FR-CY	Flame Retardant Polyethylene	25 (7.6)	3/8 – 4 (9.5 – 101.6)	0.50 (12.7)	-4°F to 122°F (-20°C to 50°C)	0.055 (1.40)	Natural			
T50T-Q	TFE Polytetrafluorethylene	250 (76.2)								
T50FR-TLY	Flame Retardant Polyethylene	100 (30.5)								



T12T-C



T25F-M



T38FR-C20Y



T50F-C4Y

Continued on the next page

Spiral Wrap, *continued*

Part Number	Material	Length Per Reel ft. (m)	Bundle Diameter Range in. (mm)	Outside Diameter in. (mm)	Temperature Range	Wall Thickness in. (mm)	Color	Std. Pkg Qty.
T50FR-C20Y	Flame Retardant Polyethylene	100 (30.5)	3/8 – 4 (9.5 – 101.6)	0.50 (12.7)	-4°F to 122°F (-20°C to 50°C)	0.060 (1.52)	Black	1
T62F-C	Polyethylene		1/2 – 4 1/2 (12.7 – 114.3)	0.62 (15.9)		0.062 (1.57)	Natural	
T62N-C0	Weather Resistant Nylon 6.6					0.035 (0.89)	Black	
T75FR-CY	Flame Retardant Polyethylene		5/8 – 5 15 (9 – 127.0)	0.75 (19.1)		0.065 (1.65)	Natural	
T75F-C0	Weather Resistant Polyethylene						Black	
T75T-X	TFE Polytetrafluorethylene	-454°F to 356°F (-270°C to 180°C)			0.030 (0.76)	Natural		
T75F-C	Polyethylene				0.065 (1.65)			
T25F-C0	Weather Resistant Polyethylene	100 (30.5)	3/16 – 2 (4.8 – 50.8)	0.25 (6.4)	-40°F to 122°F (-40°C to 50°C)	0.040 (1.02)	Black	
T25F-C	Polyethylene						Natural	
T25F-C3Y	Polyethylene						Orange	
T25FR-CY	Fire Resistant Polyethylene						Natural	
T25N-C0	Weather Resistant Nylon 6.6						Black	
T50F-TL	Polyethylene	250 (76.2)	3/8 – 4 (9.5 – 101.6)	0.50 (12.7)		0.060 (1.52)	Natural	
T50F-TL0	Weather Resistant Polyethylene						Black	
T50P-C0	Weather Resistant Polyethylene	100 (30.5)				0.030 (0.76)		
T62T-Q	TFE Polytetrafluorethylene	25 (7.6)	1/2 – 4 1/2 (12.7 – 114.3)	0.62 (15.9)	-454°F – 356°F (-270°C – 180°C)	0.065 (1.65)	Natural	
T75F-T	Polyethylene	200 (61)	5/8 – 5 15 (9 – 127.0)	0.75 (19.1)	-4°F to 122°F (-20°C to 50°C)		Black	
T75FR-C20Y	Flame Retardant Polyethylene	100 (30.5)	5/8 – 5 15 (9 – 127.0)			1.00 (25.4)	0.070 (1.78)	Natural
T100F-C	Polyethylene		7/8 – 6 (22.2 – 152.4)	Black				
T100F-C0	Weather Resistant Polyethylene			7/8 – 6 (22.2 – 152.4)				



Grommet Edging

Part Number	Width in. (mm)	Height B in. (mm)	Panel Thickness Range in. (mm)	Material	Temperature Range	Color	Std. Pkg. Qty.
-------------	-------------------	----------------------	---	----------	----------------------	-------	----------------------

Slotted

GEE62F-C	0.13 (3.3)	0.16 (4.1)	0.036 – 0.062 (0.9 – 1.6)	Polyethylene	-40°F to 122°F (-40°C to 50°C)	Natural	1
GEE189F-C	0.297 (7.55)	0.301(7.65)	0.144 – 0.189 (3.66 – 4.8)	Weather Resistant Polyethylene		Black	
GEE189F-C0							

Slotted Adhesive Lined


GEE62F-A-C	0.13 (3.3)	0.16 (4.1)	0.036 – 0.062 (0.9 – 1.6)	Polyethylene	-40°F to 122°F (-40°C to 50°C)	Natural	1
GEE62F-A-C0				Weather Resistant Polyethylene		Black	
GEE99F-A-C	0.17 (4.3)	0.19 (4.7)	0.062 – 0.099 (1.6 – 2.5)	Polyethylene		Natural	
GEE99F-A-C0				Weather Resistant Polyethylene		Black	
GEE144F-A-C	0.21 (5.4)	0.22 (5.6)	0.099 – 0.144 (2.5 – 3.7)	Polyethylene		Natural	
GEE144F-A-C0				Weather Resistant Polyethylene		Black	
GEE189F-A-C	0.297 (7.55)	0.301 (7.65)	0.144 – 0.189 (3.66 – 4.8)	Polyethylene		Natural	
GEE189F-A-C0				Weather Resistant Polyethylene		Black	

Solid Adhesive Lined - Use on straight edges only

GES62F-A-C	0.13 (3.3)	0.16 (4.1)	0.036 – 0.062 (0.9 – 1.6)	Polyethylene	-40°F to 122°F (-40°C to 50°C)	Natural	1
GES99F-A-C	0.17 (4.3)	0.19 (4.7)	0.062 – 0.099 (1.6 – 2.5)	Weather Resistant Polyethylene		Black	
GES99F-A-C0				Polyethylene		Natural	
GES189F-A-C	0.297 (7.55)	0.301 (7.65)	0.144 – 0.189 (3.66 – 4.8)	Weather Resistant Polyethylene		Black	
GES189F-A-C0							

National Aerospace Standard NAMS21266 in 12.75 in. Lengths

GE128-C	0.22 (5.6)	0.16 (3.9)	0.052 – 0.085 (1.3 – 2.2)	Nylon 6.6	-40°F to 122°F (-40°C to 50°C)	Natural	1
GE255-L	0.39 (9.8)	0.24 (6.1)	0.192 – 0.255 (4.9 – 6.5)				



GEE62F-C



GES62F-A-C



GE128-C

Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions

Terminals

Wiring Ducts

Stronghold
Contractor
Products

HSTTA Heat Shrink 4-Foot Pieces

Part Number	Min Expanded I.D. in. (mm)	Max. Recovered I.D. in. (mm)	Nominal Recovered Wall Thickness in. (mm)	Std. Pkg. Qty.
HSTTA25-48-TL	0.25 (6.4)	0.08 (2.0)	0.04 (1.0)	250
HSTTA50-48-5	0.5 (12.7)	0.016 (4.1)	0.07 (1.8)	5
HSTTA75-48-5	0.75 (19.1)	0.250 (6.4)	0.85 (2.2)	
HSTTA100-48-5	1.0 (25.4)	0.320 (8.1)	0.10 (2.5)	
HSTTA150-48-Q	1.5 (38.1)	0.510 (12.9)	1.00 (2.5)	25



HSTTA25-48-TL

HSTT Heat Shrink 4-Foot Pieces and Reels

	Nominal Expanded I.D in. (mm)	Max. Recovered I.D. in. (mm)	Nominal Recovervd Wall Thickness in. (mm)					
Part Number				Length ft. (m)	Length Per Reel ft. (m)	Std. Pkg. Qty.	Std. Ctn. Qty.	
HSTT06-CC	0.063 (1.6)	0.031 (0.8)	0.017 (0.4)	4 (1.2)	100 (30.5)	1	10	
HSTT12-CC	0.125 (3.2)	0.062 (1.6)	0.02 (0.5)	—			—	25
HSTT12-48-Q				4 (1.2)	10			
HSTT12-48-Q	0.187 (4.8)	0.093 (2.4)			—	1		
HSTT25-48-Q	0.250 (6.4)	0.125 (3.2)		0.025 (0.6)				
HSTT25-D			4 (1.2)		—			
HSTT25-48-QC			—		10			
HSTT25-C			—		—			
HSTT38-48-Q	0.375 (9.5)	0.187 (4.8)	4 (1.2)		—	25	—	
HSTT38-C			—		100 (30.5)	1	10	
HSTT50-48-5	0.500 (12.7)	0.250 (6.4)	4 (1.2)		—	5	—	
HSTT50-CC			—		100 (30.5)	1	10	
HSTT50-C							—	
HSTT75-C	0.750 (19.1)	0.375 (9.5)	0.030 (0.8)		4 (1.2)	—	5	2
HSTT75-48-5				—				—
HSTT100-48-5	1.00 (25.4)	0.500 (12.7)	0.035 (0.9)	—	100 (30.5)	1	2	
HSTT100-CC							—	—
HSTT100-C							2	
HSTT150-48-5	1.50 (38.1)	0.750 (19.1)	0.040 (1.0)	4 (1.2)	—	5	—	
HSTT150-48-5C					100 (30.5)		—	
HSTT150-C				—	50 (15.2)	1	2	
HSTT200-L	2.00 (50.8)	1.00 (25.4)	0.045 (1.1)	—	—	5	—	
HSTT200-48-5				4 (1.2)	—		2	
HSTT300-L	3.00 76.2	1.50 (38.1)	0.050 (1.3)	—	50 (15.2)	1	0	



HSTT06-CC



HSTT100-48-5

HST Thick Wall Polyolefin Heat Shrink

Part Number	Min Expanded I.D. in. (mm)	Max. Recovered I.D. in. (mm)	Nominal Recovered Wall Thickness in. (mm)	Length in. (mm)	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
HST0.4-48-5Y	0.04 (10.2)	0.16 (4.1)	0.080 (2.0)	48.0 (1219.2)	Black	5	20
HST0.8-48-5Y	0.75 (19.1)	0.22 (5.6)	0.09 (2.3)	6.0 (152.4)		10	100
HST0.8-6-XY				48.0 (1219.2)		5	20
HST1.1-48-5Y	1.10 (27.9)	0.38 (9.5)	0.12 (3.0)			15	
HST1.5-48-5Y	1.50 (38.1)	0.50 (12.7)	0.16 (4.1)				
HST2.0-48-2Y	2.00 (50.8)	0.67 (16.9)				2	8
HST3.0-48-2	3.00 (76.2)	1.00 (25.4)					



HST0.4-48-5Y

Corrugated Loom Tubing

Part Number	Material	Length Per Reel ft. (m)	Inside Diameter in. (mm)	Outside Diameter in. (mm)	Temperature Range	Color	Std. Pkg. Qty.
Polyethylene Slit Wall							
CLT25F-C20	Polyethylene	100 (30.5)	0.28 (7.2)	0.40 (10.1)	-40°F to 122°F (-40°C to 50°C)	Black	1
CLT38F-C20			0.39 (10.0)	0.52 (13.3)		Orange	
CLT50F-C3			0.51 (13.0)	0.65 (16.6)		Yellow	
CLT50F-C4						Black	
CLT50F-C20			0.66 (16.9)	0.85 (21.1)		Orange	
CLT62F-C3						Black	
CLT62F-C20			0.77 (19.5)	0.94 (23.9)		Orange	
CLT75F-C3						Yellow	
CLT75F-C4						Black	
CLT75F-C20		2000 (609.6)				Black	
CLT75F-2M20						Orange	
CLT100F-C3		100 (30.5)	0.91 (23.2)	1.10 (28.0)		Yellow	
CLT100F-C4						Black	
CLT100F-C20		50 (15.2)	1.28 (32.5)	1.54 (39.0)			
CLT125F-L20							
CLT150F-X4		10 (3.1)	1.58 (40.0)	1.85 (47.0)		Yellow	
CLT150F-X4F							
CLT150F-D4F		500 (152.4)	1.51 (38.4)	1.76 (44.6)		Black	
CLT150F-X20		10 (3.1)	1.58 (40.0)	1.85 (47.0)			
CLT150F-T20		200 (61.0)					
CLT188F-C20		100 (30.5)	1.85 (47.0)	2.19 (55.7)			



GE128-C



CLTS25F-C

Polyethylene Solid Wall

CLTS25F-C	Polyethylene	100 (30.5)	0.28 (7.2)	0.40 (10.1)	-40°F to 122°F (-40°C to 50°C)	Black	1
-----------	--------------	------------	------------	-------------	-----------------------------------	-------	---

Nylon Slit

CLT25N-C630	Heat Stabilized Nylon 6	100 (30.5)	0.28 (7.2)	0.40 (10.1)	-40°F to 122°F (-40°C to 50°C)	Black	1
CLT50N-C630			0.39 (10)	0.52 (13.3)			
CLT75N-C630			0.77 (19.5)	0.94 (23.9)			

Nylon Solid

CLTS25N-C	Heat Stabilized Nylon 6	100 (30.5)	0.28 (7.2)	0.40 (10.1)	-40°F to 122°F (-40°C to 50°C)	Black	1
-----------	-------------------------	------------	------------	-------------	-----------------------------------	-------	---

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Braided Expandable Sleeving

Braided Expandable Sleeving – Polyethylene Terephthalate (PET)

Part Number	Nominal I.D in. (mm)	Nominal Diameter Range in. (mm)	Length Per Reel ft. (m)	Color	Std. Pkg. Qty	Std. Ctn. Qty.					
SE125P-TR0	1.25 (31.8)	0.75 – 1.5 (19.1 – 38.1)	200 (61.0)	Black	1	2					
SE12P-TR0	0.12 (3.2)	0.94 – 0.21 (2.4 – 6.4)				4					
SE125P-LR0	1.25 (31.8)	0.75 – 1.5 (19.1 – 38.1)	50 (15.2)			2					
SE25P-MR0	0.25 (6.4)	0.125 – 0.375 (3.2 – 9.5)	1000 (304.8)			4					
SE25P-TR0						2					
SE38P-MR0	0.38 (9.5)	0.188 – 0.50 (4.8 – 12.7)				4					
SE38P-TR0						2					
SE50P-CR0	0.50 (12.7)	0.250 – 0.75 (6.4 – 19.1)	100 (30.5)			4					
SE50P-DR0			500 (152.4)			2					
SE75P-DR0	0.75 (19.1)	0.50 – 1.25 (12.7 – 31.8)				4					
SE75P-CR0						2					



SE125P-TR0

Braided Expandable Sleeving – Flame Retardant Polyethylene Terephthalate

Part Number	Nominal I.D in. (mm)	Nominal Diameter Range in. (mm)	Length Per Reel ft. (m)	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
SE50PFR-DR0	0.5 (12.7)	0.25 – 0.75 (6.4 – 19.1)	500 (152.4)	Black	1	2
SE75PFR-DR0	0.75 (19.1)	0.50 – 1.25 (12.7 – 31.8)				
SE12PFR-MR0	0.12 (3.2)	0.94 – 0.21 (2.4 – 6.4)				
SE25PFR-MR0	0.25 (6.4)	0.125 – 0.375 (3.2 – 9.5)	200 (61.0)			4
SE25PFR-TR0						
SE125PFR-TR0	1.25 (38.1)	1.00 –2.125 (25.4 – 54.4)				
SE12PFR-TR0	0.12 (3.2)	0.94 – 0.205 (2.4 – 6.4)	500 (152.4)			
SE38PFR-MR0	0.38 (9.5)	0.188 – 0.50 (4.8 – 12.7)	1000 (304.8)			
SE38PFR-TR0						
SE50PFR-CR0	0.5 (12.7)	0.250 – 0.750 (6.4 – 19.1)	100 (30.8)			



SE50PFR-DR0

Fray Resistant Braided Expandable Sleeving

Part Number	Nominal I.D. Range in. (mm)	Nominal Diameter Range in. (mm)	Length Per Reel ft. (m)	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
SE75PSC-CR0	0.75 (19.1)	0.63 – 1.00 (15.9 – 25.4)	100 (30.5)	Black	1	4
SE125PSC-LR0	1.25 (31.8)	1.00 – 1.50 (25.4 – 38.1)	50 (15.2)			



SE75PSC-CR0

Braided Sleeving

Pan-Wrap™ Braided Sleeving

Part Number	Nominal I.D Range in. (mm)	Nominal Wall Thickness in. (mm)	Length Per Reel ft. (m)	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
Split Sleeving						
SE38PS-CLR0	0.38 (9.7)	0.038 (0.97)	150 (45.7)	Black	1	2
SE38PSFR-CLR0						
SE50PS-CLR0	0.50 (12.7)	0.025 (0.6)	100 (30.5)			
SE75PS-CR0						
SE75PSFR-CR0	0.75 (19.1)	0.038 (1.0)	75 (22.9)			
SE100PS-CR0						
SE125PSFR-LQR0	1.25 (31.8)	1.25 (31.8)	50 (15.2)			
SE125PS-LQR0						
SE200PS-LR0	2 (50.8)	0.038 (0.97)				



SE38PS-CLR0

Tinned Copper Braided Sleeving

Part Number	Nominal Diameter Range in. (mm)	Current Capacity	Length Per Role ft. (m)	Color
SE25TC-C	0.25 (6.4)	25	100 (30.5)	Silver
SE50TC-L	0.50 (12.7)		50 (15.2)	
SE88TC-L	0.875 (22.2)			
SE100TC-L	1.00 (25.4)			
SE125TC-L	1.25 (31.8)			
SE150TC-L	1.5 (38)			
SE200TC-L	2 (50.8)			



SE25TC-C

Insulating Fiberglass Tubing

Part Number	Nominal Diameter Range in. (mm)	Wall Thickness in. (mm)	Length Per Rol ft. (m)	Color
FT50-C	0.5 (12.7)	0.025 (0.6)	100 (30.5)	Silver
FT62-C	0.625 (15.9)			
FT75-C	0.75 (19.1)			
FT100-C	1.0 (25.4)			
FT150-C	1.5 (38)			
FT125-C	1.25 (31.8)			
FT200-L	2.0 (50.8)		50 (15.2)	
FT38-C	3.0 (76.2)			
FT300-L				



FT50-C

Duct Seal – Sealing Compounds

Part Number	Description	Std. Pkg. Qty.
DS1	Duct seal (sealing compound) 1 lbs. package	1
DS5	Duct seal (sealing compound) 5 lbs. package	



DS1

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

CABLE CLEATS

Strapping Cable Cleats.....	75
Stainless Steel Cable Cleats.....	75
Polymer Cable Cleats.....	76

Strapping Cable Cleats

Pan-Wrap™ Split Harness Wrap

Part Number	Flat/ Multicore Double Loop Cable Diameter Range in. (mm)	Flat/ Multicore Triple Loop Cable Diameter Range in. (mm)	Trefoil Double Loop Cable Diameter Range in. (mm)	Trefoil Triple Loop Cable Diameter Range in. (mm)	Quad Double Loop Cable Diameter Range in. (mm)	Quad Triple Loop Cable Diameter Range in. (mm)	Width in. (mm)	Std. Pkg. Qty.
-------------	--	---	---	--	--	---	----------------------	----------------------

Strapping Cable Cleats

MS4W75T30-Q6	0.47 – 1.77 (12 – 45)	0.47 – 1.18 (12 – 30)	0.47 – 0.79 (12 – 20)	—	—	—	0.75 (19.10)	25
MS6W75T30-Q6	1.77 – 2.76 (45 – 70)	1.18 – 1.81 (30 – 46)	0.79 – 1.18 (20 – 30)	0.47 – 0.79 (12 – 20)	0.47 – 0.98 (12 – 25)			
MS8W75T30-Q6	2.76 – 3.74 (70 – 95)	1.81 – 2.48 (46 – 63)	1.18 – 1.65 (30 – 42)	0.79 0 –1.02 (20 – 26)	0.98 – 1.42 (25 – 36)			
MS10W75T30-Q6	3.74 – 4.72 (95 – 120)	2.48 – 3.15 (63 – 80)	1.65 – 2.28 (42 – 58)	1.02 – 1.38 (26 – 35)	1.42 – 1.93 (36 – 49)			
MS12W75T30-Q6	4.72 – 5.91 (120 – 150)	3.15 – 3.94 (80 – 100)	2.28 – 2.83 (58 – 72)	1.38 – 1.73 (35 – 44)	1.93 – 2.4 (49 – 61)			
						1.18 – 1.46 (30 – 37)		



MS4W75T30-Q6

Locking Strap Cable Cleats

Part Number	Flat/Multicore Double Loop Cable Diameter Range in. (mm)	Trefoil Triple Loop Cable Diameter Range in. (mm)	Quad Double Loop Cable Diameter Range in. (mm)	Width in. (mm)	Std. Pkg. Qty.
-------------	---	--	---	-------------------	----------------------

MLT4DH-L	0.47 – 3.74 (12 – 95)	0.47 – 1.65 (12 – 42)	0.47 – 1.42 (12 – 36)	0.31 (7.9)	25
MLT4DSH-Q				0.62 (15.9)	
MLT4DEH15-Q316				0.50 (12.70)	
MLT4DSH-Q316				0.63 (15.90)	
MLT6DSH-Q	3.74 – 5.91 (95 – 150)	1.65 – 2.83 (42 – 72)	1.42 – 2.40 (36 – 61)	0.62 (15.9)	
MLT6DSH-Q316				0.50 (12.70)	
MLT6DEH15-Q316				0.63 (15.90)	



MLT4DH-L

Cushion Sleeve Reels

Part Number	Material	Length ft. (m)	Width in. (mm)	Thickness in. (mm)	Std. Pkg. Qty.
-------------	----------	-------------------	-------------------	-----------------------	----------------------

PCSS-B-CR	Neoprene	100 30.5	0.33 (8.4)	0.13 (3.4)	1
PCSH-B-CR			0.47 (11.9)		
PCSSH-B-CR			0.91 (23.1)	0.12 (3.1)	



PCSS-B-CR

Stainless Steel Cable Cleats

Stainless Steel Cable Cleats

Part Number	Description	Rung Height in. (mm)	Rung Width in. (mm)	Part Weigh lbs. (g)
-------------	-------------	-------------------------	------------------------	------------------------

CBH Series Brackets

CBH30L50-V6	Cleat bracket, height 30mm, length 50mm, 316L stainless steel	0.98 – 1.18 (25 – 30)	1.97 (50)	0.34 (154)
CBH20L50-V6	Cleat bracket, height 20mm, length 50mm, 316L stainless steel	0.59 – 0.79 (15 – 20)		0.32 1(45)
CBH25L50-V6	Cleat bracket, height 25mm, length 50mm, 316L stainless steel	0.79 – 0.98 (20 – 25)		0.33 (151)



CBH30L50-V6

Stainless Steel Cable Cleats, continued

Stainless Steel Trefoil Cable Cleats

Part Number	Cable Diameter Range in. (mm)	Height in. (mm)	Width in. (mm)	Depth in. (mm)	Weight lbs. (g)	Mounting Holes	Std. Pkg. Qty.
CCSSTR3036-X	1.18 – 1.42 (30 – 36)	3.94 (100)	4.13 (105)	2.48 (63)	1.14 (518)	1 X M8	10
CCSSTR2328-X	0.91 – 1.10 (23 – 28)	3.58 (91)	3.54 (90)		0.97 (439)		
CCSSTR2632-X	1.02 – 1.26 (26 – 32)	3.74 (95)	3.82 (97)		1.06 (480)		
CCSSTR3440-X	1.34 – 1.58 (34 – 40)	4.25 (108)	4.37 (111)		1.21 (547)		
CCSSTR3844-X	1.50 – 1.73 (38 – 44)		4.69 (119)		1.28 (581)		
CCSSTR4248-X	1.65 – 1.89 (42 – 48)	4.41 (112)	4.96 (126)		1.35 (613)		



CCSSTR3036-X

Polymer Cable Cleats



CCPL1H1013-X

Polymer Cable Cleats

Part Number	Cable Diameter Range in. (mm)	Height in. (mm)	Width in. (mm)	Depth in. (mm)	E in. (mm)	S in. (mm)	Weight lbs. (g)	Mounting Holes	Std. Pkg. Qty.
Polymer One-Hole Cable Cleats									
CCPL1H1013-X	0.39 – 0.51 (10 – 13)	1.10 (28)	1.74 (44)	1.69 (43)	0.56 (14)	0.83 (21)	0.08 (38)	1 x M10	10
CCPL1H1316-X	0.51 – 0.63 (13 – 16)	1.22 (31)	1.87 (48)			0.87 (22)	0.10 (44)		
CCPL1H1619-X	0.63 – 0.75 (16 – 19)	1.34 (34)	2.00 (51)			0.94 (24)	0.11 (49)		
CCPL1H1923-X	0.75 – 0.91 (19 – 23)	1.46 (37)	2.15 (55)			1.01 (26)	0.12 (56)		
CCPL1H2327-X	0.91 – 1.06 (23 – 27)	1.61 (41)	2.32 (59)			1.09 (28)	0.14 (63)		
CCPL1H2732-X	1.06 – 1.26 (27 – 32)	1.77 (45)	2.52 (64)	1.73 (44)	0.59 (15)	1.19 (30)	0.16 (72)		
CCPL1H3238-X	1.26 – 1.50 (32 – 38)	1.97 (50)	2.75 (70)			1.31 (33)	0.18 (82)		
CCPL1H3846-X	1.50 – 1.81 (38 – 46)	2.28 (58)	3.06 (78)			1.46 (37)	0.21 (96)		
CCPL1H4651-X	1.81 – 2.01 (46 – 51)	2.56 (65)	3.29 (84)			1.57 (40)	0.25 (114)		
CCPL1H5157-X	2.01 – 2.24 (51 – 57)	2.76 (70)	3.53 (90)			1.69 (43)	0.28 (125)		

Polymer Two-Hole Cable Cleats

Part Number	Cable Diameter Range in. (mm)	Height in. (mm)	Width in. (mm)	Depth in. (mm)	P in. (mm)	Weight lbs. (g)	Mounting Holes	Std. Pkg. Qty.
CCPL2H3846-X	1.50 – 1.81 (38 – 46)	2.20 (56)	4.07 (103)	1.73 (44)	2.92 (74)	0.31 (143)	2 x M10	10
CCPL2H4658-X	1.81 – 2.28 (46 – 58)	2.56 (65)	4.53 (115)		3.37 (86)	0.38 (175)		
CCPL2H5870-X	2.28 – 2.76 (58 – 70)	3.07 (78)	5.04 (128)	1.76 (45)	3.85 (98)	0.48 (22)		



CCPL2H3846-X

Polymer Trefoil Cable Cleats

Part Number	Cable Diameter Range in. (mm)	Height in. (mm)	Width in. (mm)	Depth in. (mm)	S in. (mm)	Weight lbs. (g)	Mounting Holes	Std. Pkg. Qty.
CCPLTR2633-X	1.02 – 1.30 (26 – 33)	3.86 (98)	5.59 (142)	3.07 (78)	4.02 (102)	1.39 (630)	1 X M10, 2 X M10	10
CCPLTR3139-X	1.22 – 1.54 (31 – 39)	4.13 (05)	6.06 (154)		4.49 (114)	1.51 (685)		
CCPLTR3745-X	1.46 – 1.77 (37 – 45)	4.61 (117)	6.54 (166)		4.96 (126)	1.64 (745)		
CCPLTR4352-X	1.69 – 2.05 (43 – 52)	5.04 (128)	7.09 (180)		5.51 (140)	1.80 (815)		



CCPLTR2633-X

CABLE TIES

Locking Cable Ties.....	78
Metal Locking Barb Cable Ties.....	83
Low Profile, Parallel-Entry Cable Ties.....	87
2-Wedge, Locking Cable Ties.....	88
2-Piece, Low Thread Force Cable Ties	88
Antimicrobial Cable Ties.....	89
Stainless Steel Cable Ties	90
Reel-Fed Cable Ties.....	92

Locking Cable Ties



PLT6LH-C

Locking Tie Cable Ties – Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	-----------------	----------------	---------------------------	-------------------------------------	----------	-----------------------	-------------------	---------------------------	---------------	-------	-----------

Light-Heavy Cross Section (Straight Tip)

PLT6LH-C	21.9 (556)	0.30 (7.6)	6.00 (152)	120 (534)	Nylon 6.6	—	Y	V-2	2, 21	Natural	100
PLT6LH-L			50								
PLT7LH-C	24.7 (627)		7.00 (178)								100
PLT7LH-L			50								
PLT8LH-C	27.6 (701)		8.00 (203.2)								100
PLT9LH-C	30.5 (775)		9.00 (229)								50
PLT9LH-L											

Heavy Cross Section (Straight Tip)

PLT10LH-C	34.3 (371)	0.35 (8.9)	8.00 (203.2)	175 (778)	Nylon 6.6	—	Y	V-2	1, 11	Natural	100
-----------	------------	------------	--------------	-----------	-----------	---	---	-----	-------	---------	-----



PLT5H-C0

Locking Tie Cable Ties – Weather Resistant Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	-----------------	----------------	---------------------------	-------------------------------------	----------	-----------------------	-------------------	---------------------------	---------------	-------	-----------

Light-Heavy Cross Section

PLT6LH-C0	21.9 (556)	0.30 (7.6)	6.0 (152)	120 (534)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21	Black	1000
PLT6LH-L0											50
PLT7LH-C0	24.7 (627)		7.0 (176)								100
PLT7LH-L0			50								
PLT8LH-C0	27.6 (701)		8.0 (203.2)								100
PLT9LH-C0	30.5 (775)		9.0 (229)								
PLT9LH-L0											

Heavy Cross Section

PLT4H-TL0/147	14.5 (368)	0.35 (8.9)	13.0 (330)	175 (778)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21	Black	250
---------------	------------	------------	------------	-----------	-----------------------------	--------------	---	-----	-------	-------	-----

Locking Cable Ties, continued



PLT7LH-C30

Locking Tie Cable Ties – Heat Stabilized Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
Light-Heavy Cross Section (Straight Tip)											
PLT7LH-C30	24.7 (627)	0.50 (12.7)	9.00 (229)	250 (1112)	Weather Resistant Nylon 6.6	UV Resistant	—	V-2	1, 11	Black	100
PLT9LH-C30	28.3 (719)										



PLT9LH-C300

Locking Tie Cable Ties – Heat Stabilized Weather Resistant Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
Standard Cross Section											
PLT3S-M300	11.5 (292)	0.19 (4.8)	3.00 (76)	50 (222)	Heat Stabilized Weather Resistant Nylon 6.6	Heat and UV Resistant	Y	V-2	2	Black	1000
Light-Heavy Cross Section											
PLT9LH-C300	30.5 (775)	0.30 (7.6)	9.00 (229)	120 (534)	Heat Stabilized Weather Resistant Nylon 6.6	Heat and UV Resistant	Y	V-2	2	Black	100



PLT7LH-C6120

Locking Tie Cable Ties – Weather Resistant Nylon 612

Part Number	Length in. (mm)	Width in. (mm)	Thickness in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Pkg. Qty.
Light-Heavy Cross Section						
PLT7LH-C6120	24.7 (627)	0.3 (7.6)	0.075 (1.9)	7.0 (178)	120 (534)	100
PLT8LH-C6120	27.6 (701)			8.0 (203)		

Locking Cable Ties, continued



PLT1M-C702Y

Locking Tie Cable Ties – HALAR* – Distinctive Maroon Color

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	--------------------	-------------------	---------------------------------	---	----------	--------------------------	-------------------------	---------------------------------	---------------------	-------	--------------

Miniature Cross Section

PLT1M-C702Y	4.00 (102)	0.098 (2.5)	0.87 (22)	18 (80)	HALAR	Heat and UV Resistant	Y	V-0	2, 21	Maroon	100
-------------	------------	-------------	-----------	---------	-------	--------------------------	---	-----	-------	--------	-----

Miniature Cross Section

PLT2S-C702Y	7.4 (188)	0.190 (4.8)	1.88 (48)	50 (222)	HALAR	Heat and UV Resistant	Y	V-0	2, 21, 2S, 21S	Maroon	100
PLT3S-C702Y	11.5 (292)		3.00 (76)								



PLT1M-C76

Locking Tie Cable Ties – TEFZEL** – Distinctive Aqua Blue Color

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	--------------------	-------------------	---------------------------------	---	----------	--------------------------	-------------------------	---------------------------------	---------------------	-------	--------------

Miniature Cross Section

PLT1M-C76	4.0 (102)	0.098 (2.5)	0.87 (22)	18 (80)	TEFZEL	Chemical, Radiation, UV and High Heat	—	V-0	1, 11	Aqua	100
PLT1M-M76											1000

Intermediate Cross Section

PLT2I-C76	8.0 (203)	0.135 (3.4)	2.00 (51)	30 (133)	TEFZEL	Chemical, Radiation, UV and High Heat	—	V-0	1, 11	Aqua	100
PLT2I-M76											1000

Standard Cross Section

PLT2S-C76	7.4 (188)	0.190 (4.8)	0.87 (22)	50 (222)	TEFZEL	Chemical, Radiation, UV and High Heat	—	V-0	1, 11	Aqua	100
PLT2S-M76			1.88 (48)								1000
PLT3S-C76	11.5 (292)		3.00 (76)								100
PLT3S-M76											1000
PLT4S-C76	14.5 (368)		4.00 (102)								100
PLT4S-M76											1000

Light-Heavy Cross Section (Straight Tip)

PLT3H-L76	11.5 (292)	0.300 (7.6)	3.00 (76)	123 (534)	TEFZEL	Chemical, Radiation, UV and High Heat	—	V-0	1, 11	Aqua	50	
PLT3H-TL76											250	
PLT4H-L76	14.5 (368)		4.00 (102)									50
PLT4H-TL76												250

Locking Cable Ties, continued



PLT2S-C71

Locking Tie Cable Ties – PEEK (Polyetheretherketone)

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	-----------------------	----------------------	---------------------------------------	---	----------	--------------------------	-------------------------	---------------------------------	---------------------	-------	--------------

Miniature Cross Section

PLT1M-C71	4.0 (102)	0.098 (2.5)	0.87 (22)	35 (1456)	Polyetheretherketone	Chemical, Radiation and High Heat Resistant	—	V-0	—	Translucent	100
PLT1.5M-C71	5.9 (150)										

Standard Cross Section

PLT2S-C71	7.4 (188)	0.190 (4.8)	0.87 (22)	150 (668)	Polyetheretherketone	Chemical, Radiation and High Heat Resistant	—	V-0	—	Translucent	100
PLT2S-M71										Brown	1000



PLT1M-C186

Locking Tie Cable Ties – Metal Detectable Nylon 6.6 and Polypropylene

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flamma- bility Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	--------------------	-------------------	------------------------------------	---	----------	--------------------------	-------------------------	--------------------------------------	---------------------	-------	--------------

Miniature Cross Section

PLT1M-C186	3.9 (100)	0.098 (2.5)	0.87 (22)	15 (67)	Metal Impregnated Nylon 6.6	Chemical Resistant	—	HB	—	Dark Blue	100
------------	-----------	-------------	-----------	---------	-----------------------------------	-----------------------	---	----	---	-----------	-----

Intermediate Cross Section

PLT2I-C186	8.0 (203)	0.135 (3.4)	2.00 (51)	18 (80)	Metal Impregnated Nylon 6.6	Chemical Resistant	—	HB	—	Dark Blue	100
------------	-----------	-------------	-----------	---------	-----------------------------------	-----------------------	---	----	---	-----------	-----

Standard Cross Section

PLT2S-C186	7.3 (186)	0.190 (4.8)	1.85 (47)	30 (133)	Metal Impregnated Nylon 6.6	Chemical Resistant	—	HB	—	Dark Blue	100
PLT3S-C186	11.5 (291)		3.00 (76)								
PLT4S-C186	14.4 (366)		4.00 (102)								

Light-Heavy Cross Section (Straight Tip)

PLT3H-L186	11.1 (282)	0.300 (7.6)	3.00 (76)	60 (267)	Metal Impregnated Nylon 6.6	Chemical Resistant	—	HB	—	Dark Blue	100
PLT4H-L186	14.4 (366)		4.00 (102)								

Locking Cable Ties, continued



Locking Tie Releasable Lashing Ties – Weather Resistant and Heat Stabilized Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
Extra-Heavy Cross Section (No Buckle Design) (Lashing Ties)											
PLT5EH-NB-C0	19.8 (503)	0.500 (12.7)	5.00 (127)	250 (1112)	Weather Resistant Nylon 6.6	UV Resistant	—	V-2	1, 11	Black	100



Locking Tie Wing Push Mount Tie – Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
Standard Cross Section											
PLWP1SB-D	5.2 (132)	0.190 (4.8)	1.00 (25.4)	50 (222)	Nylon 6.6	—	—	V2	1,11	Natural	500

Locking Tie Double Loop Cable Ties Weather Resistant Nylon 6.6

Part Number	Max. Combined Bulde Dia. D1+D2 in. (mm)	Length in. (mm)	Width in. (mm)	Thickness in. (mm)	Min. Loop Tensile Strength lbs. (N)	Std. Pkg. Qty.
Light-Heavy Cross Section						
PLB4H-TL0	3.60 (91)	14.7 (373)	0.300 (7.6)	0.075 (1.9)	120 (534)	250



PLB4H-TL0

Locking Tie Double Clamp Cable Ties

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Std. Pkg. Qty.
PLDC1.5EH-C350	13.1 (333)	0.5 (12.7)	1.3 (33)	150 (667)	100
PLDC1.5EH-L350					50
PLDC2.5EH-C350	19.2 (489)	0.5 (12.7)	2.3 (58)	150 (667)	100
PLDC2.5EH-L350					50



PLDC1.5EH-C350

Wide Strap Cable Ties – Heat Stabilized Weather Resistant Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Color	Std. Pkg. Qty.
PLWS2EH-TL350	15.1 (15.1)	0.5 (12.7)	4.13 (105)	120 (534)	Black	250
PLWS3EH-TL350	12.1 (12.1)		3.25 (82.6)			
PLWS4EH-TL350	15.1 (15.1)		4.13 (105)			



PLWS2EH-TL350

Metal Locking Barb Cable Ties



BT1M-C

Dome-Top® Barb Ty Cable Ties – Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	-----------------	----------------	---------------------------	-------------------------------------	----------	-----------------------	-------------------	---------------------------	---------------	-------	-----------

Miniature Cross Section

BT1M-C	4.0 (102)	0.095 (2.4)	0.90 (23)	18 (80)	Nylon 6.6	—	Y	V-2	2, 21	Natural	100
BT1M-M											1000
BT1.5M-M	6.3 (160)										
BT2M-M	7.9 (200)										
BT4M-M	15.1 (384)										

Intermediate Cross Section

BT1.5I-C	6.1 (155)	0.141 (3.6)	1.50 (38)	40 (178)	Nylon 6.6	—	Y	V-2	2, 21	Natural	100
BT1.5I-M											1000
BT2I-C	8.0 (203)		2.00 (51)								100
BT2I-M											1000
BT3I-C	11.3 (287)		3.00 (76)								100
BT3I-M											1000
BT4I-M	15.1 (384)		4.00 (102)								

Standard Cross Section

BT2S-C	8.0 (203)	0.185 (4.7)	2.00 (51)	50 (222)	Nylon 6.6	—	Y	V-2	2, 21	Natural	100
BT2S-M											1000
BT3S-C	12.0 (305)		3.00 (76)								100
BT3S-M											1000
BT4S-C											100
BT4S-M	15.1 (384)		4.00 (102)								1000
BT4S-M2										Red	

Light-Heavy Cross Section (Straight Tip)

BT4LH-L	14.9 (378)	0.275 (7.0)	4.00 (102)	120 (534)	Nylon 6.6	—	Y	V-2	2, 21, 2S, 21S	Natural	50
BT4LH-TL											250
BT5LH-C	18.1 (460)		5.00 (127)								100
BT5LH-L											50
BT7LH-C	24.4 (620)		7.00 (178)								100
BT7LH-L											50
BT9LH-C	30.7 (780)		9.00 (229)								100
BT9LH-L											50

Metal Locking Barb Cable Ties, continued



BT1M-C0

Dome-Top® Barb Ty Cable Ties – Weather Resistant Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	-----------------	----------------	---------------------------	-------------------------------------	----------	-----------------------	-------------------	---------------------------	---------------	-------	-----------

Miniature Cross Section

BT1M-C0	4.0 (102)	0.095 (2.4)	0.90 (23)	18 (80)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21	Black	100
BT1M-M0											1000
BT1.5M-C0	6.3										100
BT1.5M-M0											1000
BT2M-C0	7.9 (200)										100
BT2M-M0											1000
BT4M-C0	15.1 (384)										100
BT4M-M0											1000

Intermediate Cross Section

BT1.5I-C0	6.1 (155)	0.141 (3.6)	1.50 (38)	40 (178)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21	Black	100
BT1.5I-M0											1000
BT2I-C0	8.0 (203)		2.00 (51)								100
BT2I-M0											1000
BT3I-C0	11.3 (287)		3.00 (76)								100
BT3I-M0											1000
BT4I-C0	15.1 (384)		4.00 (102)								100
BT4I-M0											1000

Standard Cross Section

BT3S-C0	11.3 (287)	0.185 (4.7)	3.00 (76)	50 (222)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21	Black	100
BT3S-M0											1000
BT4S-C0	15.1 (384)	0.185 (4.7)	4.00 (102)								100
BT4S-M0											1000

Light-Heavy Cross Section (Straight Tip)

BT2LH-L0	8.7 (221)	0.275 (7.0)	2.00 (51)	120 (534)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21, 2S, 21S	Black	50
BT2LH-TL0											
BT3LH-L0	11.8 (300)		3.00 (76)								
BT3LH-TL0											
BT4LH-L0	14.9 (378)		4.00 (102)								
BT4LH-TL0											
BT5LH-C0	18.1 (460)		5.00 (127)								250
BT5LH-L0											100
BT7LH-C0	24.4 (620)		7.00 (178)								50
BT7LH-L0											100
BT8LH-C0	27.5 (699)		8.00 (203)								50
BT9LH-C0	30.7 (780)		9.00 (229)								100
BT9LH-L0											50

Metal Locking Barb Cable Ties, continued



BT2M-M30

Dome-Top® Barb Ty Cable Ties – Heat Stabilized Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
Miniature Cross Section											
BT2M-M30	7.9 (200)	0.095 (2.4)	2.00 (51)	18 (80)	Heat Stabilized Nylon 6.6	Heat Resistant	—	V-2	2, 21	Black	1000

Intermediate Cross Section

BT1.5I-M30	6.1 (155)	0.141 (3.6)	1.50 (38)	40 (178)	Heat Stabilized Nylon 6.6	Heat Resistant	—	V-2	2, 21	Black	1000
BT3I-M30	11.3 (287)		3.00 (76)								

Standard Cross Section

BT4S-M30	15.1 (384)	0.185 (4.7)	4.00 (102)	50 (222)	Heat Stabilized Nylon 6.6	Heat Resistant	—	V-2	2, 21	Black	1000
----------	------------	-------------	------------	----------	---------------------------	----------------	---	-----	-------	-------	------



BT1M-M300

Dome-Top® Barb Ty Cable Ties – Heat Stabilized Weather Resistant Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
Standard Cross Section											
BT1M-M300	4.0 (102)	0.185 (4.7)	2.00 (51)	50 (222)	Heat Stabilized Weather Resistant Nylon 6.6	Heat Resistant	—	V-2	2, 21	Black	1000

Light-Heavy Cross Section

BT4LH-TL300	15.5 (394)	0.275 (7.0)	4.00 (102)	120 (534)	Heat Stabilized Weather Resistant Nylon 6.6	Heat Resistant	—	V-2	2, 21	Black	250
BT5LH-C300	18.1 (460)		5.00 (127)								100



BC2S-S10-C

Dome-Top® Barb Ty Clamp Tie – Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
Standard Cross Section											
BC2S-S10-C	8.5 (216)	0.185 (4.7)	2.00 (51)	50 (222)	Nylon 6.6	—	Y	V-2	2,21	Natural	100

Metal Locking Barb Cable Ties, continued



BC4LH-S25-L0

Dome-Top® Barb Ty Clamp Tie – Weather Resistant

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	--------------------	-------------------	------------------------------------	--	----------	--------------------------	-------------------------	---------------------------------	---------------------	-------	--------------

Light-Heavy Cross Section (Straight Tip)

BC4LH-S25-L0	15.5 (394)	0.275 (7.0)	4.00 (102)	120 (534)	Weather Resistant Nylon 6.6	UV Resistant	—	V-2	1,11	Black	50
--------------	------------	-------------	------------	-----------	-----------------------------------	-----------------	---	-----	------	-------	----



BC2S-S10-D

Dome-Top® Locking Barb Ty Clamp Tie – Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	--------------------	-------------------	------------------------------------	--	----------	--------------------------	-------------------------	---------------------------------	---------------------	-------	--------------

Standard Cross Section

BC2S-S10-D	8.5 (216)	0.185 (4.7)	2.00 (51)	50 (222)	Nylon 6.6	—	Y	V2	2,21	White	100
------------	-----------	-------------	-----------	----------	-----------	---	---	----	------	-------	-----



BC2S-S10-D0



BC4LH-S25-TL0

Dome-Top® Locking Barb Ty Clamp Tie – Weather Resistant Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	--------------------	-------------------	------------------------------------	--	----------	--------------------------	-------------------------	---------------------------------	---------------------	-------	--------------

Standard Cross Section

BC2S-S10-D0	8.5 (216)	0.185 (4.7)	2.00 (51)	50 (222)	Weather Resistant Nylon 6.6	UV Resistant	—	V2	1,11	Black	500
-------------	-----------	-------------	-----------	----------	--------------------------------	-----------------	---	----	------	-------	-----

Light-Heavy Cross Section

BC4LH-S25-TL0	15.5 (394)	0.275 (7.0)	4.00 (102)	120 (534)	Weather Resistant Nylon 6.6	UV Resistant	—	V2	1,11	Black	250
---------------	------------	-------------	------------	-----------	--------------------------------	-----------------	---	----	------	-------	-----

Low Profile, Parallel-Entry Cable Ties



CBR1M-M

Contour-Ty® Cable Ties – Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	--------------------	-------------------	---------------------------------	---	----------	--------------------------	-------------------------	---------------------------------	---------------------	-------	--------------

Miniature Cross Section

CBR1M-M	4.1 (104)	0.098 (2.5)	1.00 (25)	18 (80)	Nylon 6.6	—	Y	V-2	2, 21	Natural	1000
CBR1.5M-M	5.8 (147)		1.50 (38)								
CBR2M-M	7.3 (185)		2.00 (51)								

Intermediate Cross Section

CBR3I-M	10.4 (264)	0.140 (3.6)	3.00 (76)	40 (178)	Nylon 6.6	—	Y	V-2	2, 21	Natural	1000
---------	------------	-------------	-----------	----------	-----------	---	---	-----	-------	---------	------

Standard Cross Section

CBR3S-M	10.8 (274)	0.190 (4.8)	3.00 (76)	50 (222)	Nylon 6.6	—	Y	V-2	2, 21	Natural	1000
CBR4S-M	14.0 (356)		4.00 (102)								



CBR3S-M

Contour-Ty® Cable Ties – Weather Resistant Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
-------------	--------------------	-------------------	---------------------------------	--	----------	--------------------------	-------------------------	---------------------------------	---------------------	-------	--------------

Miniature Cross Section

CBR1M-M0	4.1 (104)	0.098 (2.5)	1.00 (25)	18 (80)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21	Black	1000
----------	-----------	-------------	-----------	---------	--------------------------------	-----------------	---	-----	-------	-------	------

Intermediate Cross Section

CBR1.5I-M0	5.8 (147)	0.140 (3.6)	1.50 (38)	40 (178)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21	Black	1000
------------	-----------	-------------	-----------	----------	--------------------------------	-----------------	---	-----	-------	-------	------

Standard Cross Section

CBR2S-M0	7.6 (193)	0.190 (4.8)	2.00 (51)	50 (222)	Weather Resistant Nylon 6.6	UV Resistant	Y	V-2	2, 21	Black	1000
CBR3S-M0	10.8 (274)		3.00 (76)								
CBR4S-M0	14.0 (356)	0.190 (4.8)	4.00 (102)								

Low Profile, Parallel-Entry Cable Ties, continued



CBR2S-M39

Contour-Ty® Cable Tie – Heat Stabilized Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
Standard Cross Section											
CBR2S-M39	7.6 (193)	0.190 (4.8)	2.00 (51)	50 (222)	Heat Stabilized Nylon 6.6	Heat Resistant	—	V-2	2, 21	Natural	1000

2-Wedge, Locking Cable Ties



HV9150-C0

Hyper-V™ In-Line Cable Tie – Weather Resistant Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	Material	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Color	Pkg. Qty.
HV9150-C0	20.7 (525)	0.350 (8.9)	5.90 (150)	160 (710)	Weather Resistant Nylon 6.6	UV Resistant	—	V-2	—	Black	100

2-Piece, Low Thread Force Cable Ties

Aerial Support Ties – Weather Resistant Polypropylene

Part Number	Length in. (mm)	Max. Bundle Diameter in. (mm)	Min. Loop Tensile Strength lbs. (N)	Std. Pkg. Qty.
AST20-5-C100	8.4 (214)	2.00 (51)	75 (334)	100
AST25-5-C100	10.0 (254)	2.5 (64)		



AST20-5-C100

Antimicrobial Cable Ties



PLT1M-C96A

Antimicrobial Met-Det Cable Ties - Nylon 6.6

Part Number	Length in. (mm)	Width in. (mm)	Thickness in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensil Strength lbs. (N)	Material	Resistance Properties	Bacteria Resistance – Antimicrobial Properties	Color	Pkg. Qty
Miniature Cross Section										
PLT1M-C96A	3.9 (100)	0.098 (2.5)	0.044 (1.1)	0.87 (22)	18 (80)	Nylon 6.6	Chemical Resistance	Good	Blue	100
Intermediate Cross Section										
PLT2I-C96A	8.0 (203)	0.135 (3.4)	0.047 (1.2)	2.00 (51)	30 (133)	Nylon 6.6	Chemical Resistance	Good	Blue	100
Standard Cross Section										
PLT2S-C96A	7.3 (186)	0.190 (4.8)	0.057 (1.4)	1.88 (47)	50 (222)	Nylon 6.6	Chemical Resistance	Good	Blue	100
PLT3S-C96A	11.4 (291)			3.0 (76)						
PLT4S-C96A	14.4 (366)			4.0 (102)						
Heavy Cross Section										
PLT3H-L96A	11.4 (291)	0.3 (7.6)	0.075 (1.9)	3.0 (76)	120 (534)	Nylon 6.6	Chemical Resistance	Good	Blue	100
PLT4H-L96A	14.4 (366)			4.0 (102)						

Loose-Piece Cable Tie Hand Tools



GTS-E

GTH-E

GS2B-E

GS4H-E

GS4EH-E

Loose-Piece Cable Tie Hand Tools

Part Number	Installs Cable Tie Cross Sections	Description	Std. Pkg. Qty.	Mil-Spec Approval
GTS-E	Subminiature, Miniature, Intermediate, Standard	Trigger Handle: Black, Selector Knob: Black, Cushioned Handle: Black. Material: Impact Resistant Resin	1	MS90387-1
GTH-E	Standard, Heavy-Standard, Light-Heavy, Heavy	Trigger Handle: Red, Selector Knob: Red, Cushioned Handle: Red. Material: Impact Resistant Resin		MS90387-2
GS2B-E	Subminiature, Miniature, Intermediate, Standard	Trigger Handle: Black, Selector Knob: Black, Cushioned Handle: Black. Material: Aluminum		MS90387-1
GS4H-E	Standard, Heavy-Standard, Light-Heavy, Heavy	Trigger Handle: Red, Selector Knob: Red, Cushioned Handle: Red. Material: Aluminum		MS90387-2
GS4EH-E	Light-Heavy, Heavy, Extra-Heavy	Trigger Handle: Blue, Selector Knob: Blue, Cushioned Handle: Blue. Material: Aluminum		MS90387-4

Stainless Steel Cable Ties

Pan-Steel® Self-Locking Cable Ties – MLT Series

Part Number	Max Bundle Diameter in. (mm)	Min Bundle Diameter in. (mm)	Length in. (mm)	Width in. (mm)	Thickness in. (mm)	Min Loop Tensile Strength lbs. (N)	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
Light-Heavy Cross Section									
MLT4LH-LP	4.0 (102)	0.50 (12.7)	14.3 (362)	0.25 (6.4)	0.010 (0.25)	250 (1112)	GS4MT-E, HTMT, PPTMT, ST2MT	50	250
Super-Heavy Cross Section									
MLT4SH-LP316	4.0 (102)	1.0 (25.4)	17.1 (434)	0.63 (15.9)	0.015 (0.38)	900 (4005)	RT2HT, RT2HTN, PBTMT	50	250
MLT6SH-LP316	6.0 (152)		23.4 (594)						



MLT4LH-LP



MLT4SH-LP316



MLT6SH-LP316

Pan-Steel® Stainless Steel Ties – MLTFC Series

Part Number	Max Bundle Diameter in. (mm)	Min Bundle Diameter in. (mm)	Length in. (mm)	Width in. (mm)	Thickness in. (mm)	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
Standard Cross Section								
MLTFC2S-CP316	2.0 (51)	7.9 (201)	100 (445)	0.18 (4.6)	0.010 (0.25)	GS4MT-E, ST2MT, HTMT,PPTMT	100	500
MLTFC4S-CP316	4.0 (102)	14.3 (362)						
Heavy Cross Section								
MLTFC2H-LP316	2.0 (51)	7.9 (201)	250 (1112)	0.31 (7.9)	0.010 (0.25)	GS4MT-E, ST2MT, HTMT,PPTMT, PBTMT	50	250
MLTFC4H-LP316	4.0 (102)	14.3 (362)						
MLTFC6H-LP316	6.0 (152)	20.5 (521)						
MLTFC8H-LP316	8.0 (203)	26.8 (679)						
Extra-Heavy Cross Section								
MLTFC4EH-LP316	4.0 (102)	14.3 (362)	300 (1335)	0.5 (12.7)	0.010 (0.25)	ST2MT, RT2HT, RT2HTN, PBTMT	50	250
MLTFC6EH-LP316	6.0 (152)	20.5 (521)						
Super-Heavy Cross Section								
MLTFC4SH-LP316	4.0 (102)	14.3 (362)	300 (1335)	0.5 (12.7)	0.010 (0.25)	RT2HT, RT2HTN, PBTMT	50	250



MLTFC2H-LP316



MLTFC4H-LP316



MLTFC4SH-LP316

Stainless Steel Cable Ties, continued

Pan-Steel® Stainless Steel Ties – MLTC Series

Part Number	Max Bundle Diameter in. (mm)	Min Bundle Diameter in. (mm)	Length in. (mm)	Width in. (mm)	Thickness in. (mm)	Min Loop Tensile Strength lbs. (N)	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
AISI 316 Stainless Steel – For Nylon 11 Selectively Coated Cable Ties Heavy Cross Section									
MLTC2H-LP316	2.0 (51)	0.50 (12.7)	7.9 (201)	0.31 (7.9)	0.010 (0.25)	250 (1112)	GS4MT-E, ST2MT, HTMT, PPTMT, PBTMT	50	250
MLTC4H-LP316	4.0 (102)		14.3 (362)						
MLTC6H-LP316	6.0 (152)		20.5 (521)						
MLTC8H-LP316	8.0 (203)		26.8 (679)						
MLTC10H-LP316	10.0 (254)		33.0 (838)						



MLTC2H-LP316



MLT4WH-TL316



MLT6WH-LP

Pan-Steel® Wave-Ty™ Stainless Steel Ties

Part Number	Max Bundle Diameter in. (mm)	Min Bundle Diameter in. (mm)	Length in. (mm)	Width in. (mm)	Thickness in. (mm)	Min Loop Tensile Strength lbs. (N)	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
AISI 316 Stainless Steel – For Superior Grip on Rigid Bundles Heavy Cross Section									
MLT4WH-TL316	4.0 (102)	2.0 (51)	14.3 (362)	0.31 (7.9)	0.010 (0.25)	450 (2000)	GS4MT-E, HTMT, PPTMT, ST2MT	250	2500
AISI 304 Stainless Steel – For Superior Grip on Rigid Bundles Heavy Cross Section									
MLT6WH-LP	6.0 (152)	2.0 (51)	20.5 (521)	0.31 (7.9)	0.010 (0.25)	450 (2000)	GS4MT-E, HTMT, PPTMT, ST2MT	250	2500

Stainless Steel Tie Mounts

Part Number	Used with Pan-Steel® Ties/Strapping	Mounting Method	Length in. (mm)	Width in. (mm)	Height in. (mm)	Hole Dia. in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
MTM1H10-C	MLTS/LH/H, MLTC/H, MLTFC/S/H, or MSW38	#10 (5mm) screw	0.9 (22.6)	0.4 (10.2)	0.17 (4.4)	0.21 (5.4)	100	1000



MTM1H10-C

Stainless Steel Push Mounts

Part Number	Used with Pan-Steel® Ties/Strapping	Mounting Method	Length in. (mm)	Width in. (mm)	Height in. (mm)	Panel Thickness in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
MPWM-H56-Q	MLTS/LH/H, MLTC/H, MLTFC/S/H	Inserted into pre-drilled hole 5/16 in. (8mm)	0.84 (21.3)	0.29 (7.3)	0.56 (14.2)	0.03 – 0.09 (0.8 – 2.4)	25	250



MPWM-H56-Q

Stainless Steel 2-Way Tie Mounts

Part Number	Used with Pan-Steel Ties/Strapping	Mounting Method	Length in. (mm)	Height in. (mm)	Scre Head Height G lbs. (N)	Slot Width Q in. (mm)	Hole Dia. in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
MTM2H-Q	MLTS/LH/H, MLTC/H, MLTFC/S/H	#8 (4mm) screw	0.71 (18.0)	0.30 (8.0)	0.09 (2.3)	0.35 (9.0)	0.17 (4.5)	25	250



MTM2H-Q

Stainless Steel Cable Ties, continued

PLT2S-VMR Reel-Fed Cable Tie Weather Resistant Nylon 6.6

Part Number	Material	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	AH-2 Plenum Rated	Continuous Use Temperature Rating	Color
PLT2S-VMR	Nylon 6.6	8.1 (206)	0.19 (4.8)	1.94 (49.3)	50 (222)	Y	-76°F to 185°F (-60°C to 85°C)	Natural
PLT2S-VMR0	Weather Resistant Nylon 6.6							Black
PLT2S-VMR30	Heat Stabilized Nylon 6.6					N	-76°F to 239°F (-60°C to 115°C)	



PLT2S-VMR



PLT2S-VMR0

BT-XMR Reel-Fed Cable Ties

Part Number	Material	Length in. (mm)	Width in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength lbs. (N)	AH-2 Plenum Rated	Continuous Use Temperature Rating	Color
BT1M-XMR	Nylon 6.6	0.82 (21)	4.0 (102)	0.190 (4.8)	30 (133)	Y	-76°F to 185°F (-60°C to 85°C)	Natural
BT1M-XMR0	Weather Resistant Nylon 6.6							Black
BT1M-XMR30	Heat Stabilized Nylon 6.6					N		
BT1.5M-XMR	Nylon 6.6	1.31 (33)	5.6 (142)	0.100 (2.5)		Y		Natural
BT1.5M-XMR30	Heat Stabilized Nylon 6.6					N		Black



BT1M-XMR



BT1M-XMR0



BT1M-XMR30

CABLE ACCESSORIES

ABMQ Multiple Bridge Adhesive Backed Cable Tie Mounts	94
Epoxy Applied Cable Tie Mounts.....	94
Epoxy Applied Swivel Cable Tie Mounts	94
Screw Applied Cable Tie Mounts	94
Screw Applied Extra-Heavy Cable Tie Mounts	95
Swivel Cable Tie Mounts	95
Screw Applied 4-Way Cable Tie Mounts	95
Contour Multiple Tie Plates	95
Multiple Tie Plates	96
Right Angle Mounts	96
Left Angle Mounts	96
Stud Tie Mounts	96
Metal Clip-On Mounts.....	96
Push Barb Cable Tie Mounts.....	97
Push Mounts	97
Push Button Mounts	97
Fir Tree Push Mounts.....	97
Pan-Post™ Standoffs	98
Right Angle Bases	98
Closed Connector Rings.....	98
Cable Spacers	98
Cable Space Cross	99
Stackable Aerial Cable Spaces	99
Marker Plates - Loose Pieces	99
4-Way Adhesive Backed Cable Tie Mounts	99
Super-Grip™ Adhesive Backed Cable Tie Mounts	101
Adhesive Backed Cord Clips	101
“J” Clip	101
Metal Adhesive Backed Cord Clips.....	102
Latching Wire Clips.....	102
Bevel Entry Clips.....	102
Adhesive Backed Latching Clips	102
Flat Cable Mounts.....	103
Flat Cable Clips.....	103
Harness Clips	103
Quick-Building™ Starter Kit.....	104
Quick-Building™ Grid Tile.....	104
Quick-Building™ Mounting Peg	104
Elastic Retainers – Replaceable Version	104
Corrugated Loom Clamps	105
High Voltage EV Cable Clamps.....	105
Heavy Duty Fixed Diameter Clamps	106
Push Mount Cord Clips	106
Vertical Cord Clip.....	106
Vertical D-Ring	106
Misc. Cable Tie Mounts	107
Antimicrobial Met-Det Cable Tie Mounts.....	107

ABMQ Multiple Bridge Adhesive Backed Cable Tie Mounts

Part Number	Used with Cable Ties	Material	Suitable Environment	Mounting Method	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
ABMQS-A-C	M, I, S	ABS	Indoor	Rubber	White	100	100

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



ABMQS-A-C

Epoxy Applied Cable Tie Mounts

Part Number	Used with Cable Ties	Material	Suitable Environment	Mounting Method	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
EMS-A-C0	M, I, S	Weather Resistant Nylon 6.6	Outdoor	EMA epoxy	Black	100	1000
EMS-A-D0						500	5000

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



EMS-A-C0

Epoxy Applied Swivel Mounts

Part Number	Used with Cable Ties	Material	Std. Pkg. Qty.	Std. Ctn. Qty.
ASMS-A-X	M, I, S, SGM, SGI	EMA epoxy	10	1000
ASMS-A-T			200	

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, SGM = Super-Grip® Miniature, and SGI = Super-Grip® Intermediate



ASMS-A-X

Screw Applied Cable Tie Mounts

Part Number	Compatible CrossSection Cable Ties	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Material	Screw Side	Suitable Environment	Color	Std. Pkg. Qty.	
TM1S6-C	M	0.51 (13.0)	0.32 (8.0)	0.23 (5.8)	Nylon 6.6	#6 (M3)	Indoor	Natural	100	
TM1S6-M									1000	
TM2S6-C	M, I, S	0.63 (16.0)	0.43 (10.8)	0.28 (7.0)					#8 (M4)	100
TM2S6-M										1000
TM2S8-C						#8 (M4)		100		
TM2S8-M								1000		
TM2S8-C0				Weather Resistant Nylon 6.6	Black	100				
TM2S8-M0						1000				
TM3S25-C	M, I, S, LH	0.88 (22.3)	0.63 (16.0)	0.38 (9.6)	Nylon 6.6	1/4 (M6) screw		Natural	100	
TM3S25-M					1000					
TM3S25-C0					Weather Resistant Nylon 6.6			Black	100	
TM3S25-M0									1000	

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, LH = Light Heavy



TM1S6-C

Screw Applied Extra-Heavy Cable Tie Mounts

Part Number	Compatible CrossSection Cable Ties	Material	Screw Size	B in. (mm)	Suitable Environment	Color	Std. Pkg. Qty.
TMEH-S8-C0	M, I, S, HS, LH, H, EH, HLM	Weather Resistant Nylon 6.6	#8 (M4)	1.62 (41.1)	Outdoor	Black	100
TMEH-S8-Q0							25
TMEH-S10-C0			#10 (M5)	1.65 (41.9)			100
TMEH-S10-Q0							25
TMEH-S10-X0							10
TMEH-S10-C100		Weather Resistant Polypropylene	1/4 (M6)	1.62 (41.1)			100
TMEH-S25-C0		Weather Resistant Nylon 6.6					25
TMEH-S25-Q0							100
TMEH-S25-X0							10

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy, H = Heavy, EH = Extra-Heavy, and HLM = Miniature Tak-Ty® Hook & Loop Ties



TMEH-S8-C0

Swivel Mounts

Part Number	Used with Cable Ties	Pull Apart Force lbs. (g)	Suitable Environment	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
TM3-X2-C0Y	M, I, S, HS, LH	120 (54,431)	Indoor/Outdoor	Black	100	1000
TMEH-X2-L0Y	M, I, S, HS, LH, H, EH, HLM	50 (113,398)			50	5800

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy, H = Heavy, EH = Extra-Heavy, and HLM = Miniature Tak-Ty® Hook & Loop Ties



TM3-X2-C0Y

Screw Applied 4-Way Cable Tie Mounts

Part Number	Compatible Cross-Section Cable Ties	Material	Screw Size	Suitable Environment	Color	Std. Pkg. Qty.
TA1S8-C	M, I, S	Nylon 6.6	#8 (M4)	Indoor	Natural	100
TA1S8-M			#8 (M4)		Black	1000
TA1S10-M			#10 (M5)			

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



TA1S8-C

Contour Multiple Tie Plates

Part Number	No. of Bundles	Used with Cable Ties*	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Hole Spacing (D) in. (mm)	Mouthing Method	Std. Pkg. Qty.	Std. Ctn. Qty.
MTPC3H-E10-C39	3	M, I, S, HS, LH, H	5.09 (129.3)	0.63 (16.0)	0.20 (5.2)	4.5 (114.3)	#10 (M5) Screw	100	1000

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy, and H = Heavy



MTPC3H-E10-C39

Multiple Tie Plates

Part Number	No. of Bundles	Used with Cable Ties*	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Hole Spacing (D) in. (mm)	Mouthing Method	Mil. Std. Part Number	Std. Pkg. Qty.	Std. Ctn. Qty.
MTP2S-E6-C	2	M, I, S	3.00 (76.2)	0.5 (12.7)	0.13 (3.2)	2.50 (63.5)	#6 (M3) Screw	MS3339-2-9	100	1000
MTP3S-E6-C	3		4.25 (108.0)			3.75 (95.3)		MS3339-3-9		
MTP3H-E6-C		M, I, S, HS, LH, H	5.09 (129.3)	0.63 (16.0)	0.20 (5.2)	4.50 (114.3)		MS3339-8-9		
MTP4S-E6-C		4	M, I, S	5.50 (139.7)	0.5 (12.7)	0.13 (3.2)		5.00 (127.0)		
MTP5H-E6-C	5	M, I, S, HS, LH, H	8.09 (205.5)	0.63 (16.0)	0.20 (5.2)	7.50(190.5)		MS3339-10-9		
MTP6H-E10-C	6		9.59 (243.6)			9.00 (228.6)	#10 (M5) Screw	—		

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy, and H = Heavy



MTP2S-E6-C



RAMS-S3-M

Right Angle Mounts

Part Number	Used with Cable Ties	Length (A) in. (mm)	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Mouthing Method	Mil. Std. Part Number	Std. Pkg. Qty.	Std. Ctn. Qty.
RAMS-S3-M	M, I, S	0.56 (14.2)	0.39 (9.9)	0.44 (1.0)	0.28 (7.1)	#3 (M2.5) Screw or 3/32 (2.4) Rivet	MS3341-2-9	1000	5000
RAMH-S6-D	M, I, S, HS, LH, H	1.00 (25.4)	0.7 (19.1)	1.00 (25.4)	0.50 (12.7)	#6 (M3) Screw or 1/8 (3.2) Rivet	MS3341-1-9	500	

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy, and H = Heavy

Left Angle Mounts

Part Number	Used with Cable Ties*	Mil. Std. Part Number	Mounting Method	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
LHMS-S6-D	M, I, S	MS3340-1-9	#6 (M3) Screw or 9/64 (3.5) Rivet	500	2500	Natural
LHMS-S10-D		—	#10 (M5) Screw or 3/16 (4.7) Rivet			

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



LHMS-S6-D

Stud Tie Mounts

Part Number	Used with Cable Ties*	Environment	Mounting Method	Color	Std. Pkg. Qty.
TMSTHS11-D0	M, I, S, HS, LH, H	Outdoors	7/16 in. (11mm) stud diameter	Black	500
TMSTHS16-D0			5/8 in. (16mm) stud diameter		

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy, and H = Heavy



TMSTHS11-D0

Metal Clip-On Mounts

Part Number	Used with Cable Ties*	Height in. (mm)	Max. Panel Thickness in. (mm)	Mounting Method	Std. Pkg. Qty.	Std. Ctn. Qty.
MCMS12-P-C	Featured	0.31 (8.0)	0.13 (3.2)	Clip-On	100	500
MCMS25-P-C		0.46 (11.5)	0.24 (6.1)			
MCMS30-P-C		0.55 (14.0)	0.27 (6.9)			

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



MCMS12-P-C

Push Barb Cable Tie Mounts

Part Number	Compatible Cross-Section Cable Ties*	Max. Panel Thickness in. (mm)	Panel Hole Diameter in. (mm)	Material	Suitable Environment	Color	Std. Pkg. Qty.
PWMS-H25-C	M, I, S	0.11 (2.7)	0.25 (6.5)	Nylon 6.6	Indoor	Natural	100
PWMS-H25-M				Weather Resistant Nylon 6.6	Outdoor	Black	1000
PWMS-H25-M0							

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



PWMS-H25-C

Push Mounts

Part Number	Used with Cable Ties*	Max. Panel Thickness in. (mm)	Panel Hole Diameter in. (mm)	Material	Suitable Environment	Mounting Method	Std. Pkg. Qty.
PM2H25-C	M, I, S	0.125 (3.2)	0.25 (6.4)	Nylon 6.6	Indoor	Push Barb	100
PM2H25-M							1000

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



PM2H25-C

Push Button Mounts

Part Number	Compatible Cross-Section Cable Ties*	Max. Panel Thickness in. (mm)	Panel Hole Diameter in. (mm)	Material	Suitable Environment	Color	Std. Pkg. Qty.
PBMS-H25-C	M, I, S	0.13 (3.2)	0.25 (6.4)	Nylon 6.6	Indoor	Natural	100
PBMS-H25-M				Weather Resistant Nylon 6.6	Outdoor	Black	1000
PBMS-H25-M0							
PBMS-H25-M14				Nylon 6.6	Indoor	Gray	
PBMS-H25-M30				Heat Stabilized Nylon 6.6		Black	

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



PBMS-H25-C



PUM-049-2S-D30

Fir Tree Push Mounts

Part Number	Used with Cable Ties*	Head Diameter in. (mm)	Panel to Top of Mount in. (mm)	Overall Height in. (mm)	Panel Hole Diameter Range in. (mm)	Panel Thickness Range in. (mm)	Material	Std. Pkg. Qty.
PUM-049-2S-D30	M, I, S	0.65 (16.5)	0.26 (6.6)	0.54 (13.8)	0.18 – 0.19 (4.6 – 4.9)	0.03 – 0.13 (0.7 – 3.0)	Heat Stabilized Nylon 6.6	1000
PUM-049-M30				0.67 (16.9)	0.25 – 0.28 (6.3 – 7.1)			500
PUM-071-2S-D30								100
PUM-071-3S-D30								1000
PUM-071-C30								
PUM-071-M30								

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard

Pan-Post™ Standoffs

Part Number	Used with Cable Ties*	Height (A) in. (mm)	Mounting Method	Color	Std. Pkg. Qty.
PP1S-S10-C	M, I, S	1.97 (50)	#10 (M5) Screw	Natural	100
PP2S-S10-C		4.6 (116.8)			#12 (M5.5) Screw
PP2S-S10-X			100		
PP2S-S12-C			10		
PP2S-S12-X			100		
PPF2S-S25-V69		5.42 (137.7)	#14 (M6) Scw		100



PP1S-S10-C

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard

Right Angle Bases

Part Number	Used with Cable Ties*	Max. Flat Cable Width in. (mm)	Length (A) in. (mm)	Material	Suitable Environment	Color	Std. Pkg. Qty.	
RAFCBI1-S6-C20	M, I, S	1.00 (25.4)	1.75 (44.4)	Nylon 6.6	Indoor	Black	100	
RAFCBI1-S6-M20							1000	
RAFCBI2-S6-C20		2.00 (50.8)	2.78 (70.6)				100	
RAFCBI2-S6-M20							1000	



RAFCBI1-S6-C20

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard

Closed Connector Rings

Part Number	Used with Cable Ties*	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Material	Suitable Environment	Mounting Method	Color	Std. Pkg Qty.
CR2-M	M, I, S	0.33 (8.4)	0.24 (6.1)	0.2 (5.0)	Nylon 6.6	Indoors	Cable Ties	Natural	1000
CR4H-M	M, I, S, HS, LH	0.57 (14.5)	0.36 (9.1)	0.3 (7.6)		Weather Resistant Nylon 6.6		Indoors/ Outdoors	
CR4H-M0									



CR2-M

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, HS = Heavy-Standard, LH = Light-Heavy



CSH-D0

Cable Spacers

Part Number	Used with Cable Ties*	Material	Suitable Environment	Mounting Method	Color	Std. Pkg. Qty.
CSH-D0	S, H	Nylon 6.6	Outdoors	Cable Ties	Natural	1000
CSH-D20		Weather Resistant Nylon 6.6	Indoors/ Outdoors			
CSEH15A30-C0	M, I, S, HS, LH, H, EH		Outdoors		CSEH15A30-C0 Cable Spacer, Black, UV PA 6.6, Cable Tie, 1.57 in. x 0.79 in.	100
CSMS-D71	M, I, S	PEEK	Indoors		CSMS-D71 Cable Spacer, Light Brown, PEEK, Cable Tie, 0.57 in. x 0.38 in.	500

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, LH = Light Heavy, H = Heavy. EH = Extra Heavy

Cable Spacer Cross

Part Number	Used with Cable Ties*	Material	Suitable Environment	Mounting Method	Color	Std. Pkg. Qty.
CSCS-M	M, I, S	Nylon 6.6	Indoors	Cable Ties	Natural	1000

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



CSCS-M

Stackable Aerial Cable Spacers

Part Number	Used with Cable Ties*	Material	Suitable Environment	Mounting Method	Color	Std. Pkg. Qty.
SACS50-T100	LH, H, EH	Weather Resistant Polypropylene	Outdoors	Cable Ties	Black	200

*Cable tie cross section sizes: LH = Light Heavy, H = Heavy, EH = Extra Heavy



SACS50-T100

Marker Plates – Loose Piece

Part Number	Used with Cable Ties*	Length (A) in. (mm)	Width (B) in. (mm)	Hole Spacing (C) in. (mm)	Material	Suitable Environment	Mounting Method	Color	Std. Pkg. Qty.
MP175-M	M, I, S	1.75 (44.5)	0.75 (19.5)	2.03 (51.6)	Nylon 6.6	Nylon 6.6	Cable Ties	White	1000
MP250-C		2.50 (63.5)	0.75 (19.5)						100
MP250W175-C		2.50 (63.5)	1.75 (44.5)						
MP250W175-M		2.50 (63.5)	1.75 (44.5)						
MP350-C		3.5 (88.9)	3.03 (77.7)	3.03 (77.7)					100

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard



4-Way Adhesive Backed Cable Tie Mounts

ABM100-A-C

Part Number	Compatible Cross-Section Cable Ties*	L x W in. (mm)	Material	Adhesive Base	Suitable Environment	Static Load Capacity lbs. (g)	Color	Std. Pkg. Qty.
ABM100-A-C	M, I, S	1.00 x 1.00 (25.4 x 25.4)	Nylon 6.6	Rubber	Indoor	0.50 (227)	White	100
ABM100-A-D							Black	500
ABM100-A-D20							White	100
ABM100-AT-C			Weather Resistant Nylon 6.6	Acrylic	Outdoor		Black	500
ABM100-AT-C0							White	100
ABM100-AT-D0							Black	500
ABM100-AV-C			Nylon 6.6	Adhesive Tape	Indoor		White	100
ABM100-AV-C0					Outdoor		Natural	
ABM100-S6-C69								
ABM112-A-C		1.12 x 1.12 (28.6 x 28.6)	Nylon 6.6	Rubber	Indoor	0.63 (286)	White	500
ABM112-A-D							Black	500
ABM112-A-D20							White	100
ABM112-AT-C			Weather Resistant Nylon 6.6	Acrylic	Outdoor		Black	500
ABM112-AT-C0					Indoor		White	
ABM112-AT-D					Outdoor		Black	
ABM112-AT-D0			Nylon 6.6	Adhesive Tape	Indoor		White	100
ABM112-AV-C					Outdoor		Black	
ABM112-AV-C0								

continued on the next page



4-Way Adhesive Backed Cable Tie Mounts, *continued*

ABM1M-A-C

ABM3H-A-L

ABMM-A-C

	Compatible Cross-Section Cable Ties*	L x W in. (mm)	Material	Adhesive Base	Suitable Environment	Static Load Capacity lbs. (g)	Color	Std. Pkg. Qty.		
Part Number										
ABM1M-A-C	M, I	0.50 x 0.50 (12.7 x 12.7)	Nylon 6.6	Rubber	Indoor	0.13 (59)	White	100		
ABM1M-A-M								1000		
ABM1M-AT-C				Acrylic				100		
ABM1M-AT-M								1000		
ABM1M-AT-M0				Outdoor	Black					
ABM2S-A-C	M	1.00 x 1.00 (25.4 x 25.4)	Weather Resistant Nylon 6.6	Rubber	Indoor	0.50 (227)	White	100		
ABM2S-A-C0					Outdoor		Black			
ABM2S-A-C20							Light Black			
ABM2S-A-D				Indoor	White		500			
ABM2S-A-D14					Gray					
ABM2S-AT-C					Acrylic		White	100		
ABM2S-AT-C0							Black			
ABM2S-AT-D				Indoor			White	500		
ABM2S-AT-D0				Outdoor			Black			
ABM2S-S6-D							White	50		
ABM3H-A-L					Black					
ABM3H-A-L20			Nylon 6.6		Rubber		Indoor	1.13 (513)	White	200
ABM3H-A-T									Weather Resistant Nylon 6.6	
ABM3H-AT-T0	Nylon 6.6	Adhesive Tape	Outdoor	White	50					
ABM3H-AV-L			Indoor	Black						
ABM3H-AV-L0		Outdoor								
ABM4H-A-L		Rubber	Indoor	2.0 (907)	White	200				
ABM4H-A-T						50				
ABM4H-AT-L	Acrylic	Outdoor	Black		200					
ABM4H-AT-T0										
ABMM-A-C	M, I	0.75 x 0.75 (19.1 x 19.1)	Weather Resistant Nylon 6.6	Rubber	Indoor	0.3 (136)	White	100		
ABMM-A-C20							Black			
ABMM-A-D					Outdoor		White	500		
ABMM-AT-C							Black			
ABMM-AT-C0					Indoor		White	100		
ABMM-AT-D					Outdoor		Black			
ABMM-AT-D0				Acrylic	Indoor		White	500		
ABMM-AV-C					Outdoor		Black			
ABMM-AV-C0							White	100		
ABMM-D					Indoor			White	0	
ABMS-A-C			Rubber					Indoor	Natural	100
ABMS-A-D										500

*Cable tie cross section sizes: M = Miniature, I = Intermediate, S = Standard, LH = Light Heavy, H = Heavy



Super-Grip™ Adhesive Backed Cable Tie Mounts

SGABM20-A-C

	Compatible Cross-Section Cable Ties*	L x W in. (mm)	Material	Adhesive Base	Suitable Environment	Static Load Capacity lbs. (g)	Color	Std. Pkg Qty.
Part Number								
SGABM20-A-C	SGM, SGI	0.75 x 0.75 (19.1 x 19.1)	Nylon 6.6	Rubber	Indoor	0.28 (127)	White	100
SGABM20-AT-C0			Weather Resistant Nylon 6.6	Acrylic	Outdoor		Black	
SGABM20-AV-C300			Heat Stabilized Weather Resistant Nylon 6.6	High Bond Acrylic		0.56 (254)		
SGABM25-A-C	SGM, SGI, SGS	1.00 x 1.00 (25.4 x 25.4)	Nylon 6.6	Rubber	Indoor	0.5 (227)	White	
SGABM25-AT-C0			Weather Resistant Nylon 6.6	Acrylic	Outdoor	0.5 (227)	Black	
SGABM25-AV-C300		1.12 x 1.12 (28.6 x 28.6)	Heat Stabilized Weather Resistant Nylon 6.6	High Bond Acrylic		1.0 (453)		
SGABM30-AV-C300					1.2 (567)			

*Cable tie cross section sizes: SGM = Super-Grip Miniature, SGI = Super-Grip Intermediate, and SGS = Super-Grip Standard



ACC19-A-C

ACC38-AV-M300

Adhesive Backed Cord Clips

Part Number	L x W in. (mm)	Max. Cable Diameter in. (mm)	Material	Adhesive Base	Suitable Environment	Static Load Capacity lbs. (g)	Color	Std. Pkg. Qty.
ACC19-A-C	0.76 x 0.63 (19.3 x 16.0)	0.19 (4.8)	Nylon 6.6	Rubber	Indoor	0.2 (91)	Natural	100
ACC19-A-M			Weather Resistant Nylon 6.6	Acrylic	Outdoor		Black	1000
ACC19-AT-M0								1000
ACC38-A-C	1.00 x 1.00 (25.4 x 25.4)	0.38 (9.6)	Nylon 6.6	Rubber	Indoor	0.50 (227)	Natural	100
ACC38-A-M			Heat Stabilized Weather Resistant Nylon 6.6	High Bond Acrylic	Outdoor	1.0 (454)	Black	1000
ACC38-AV-M300								1000
ACC62-A-C	1.12 x 1.12 (28.6 x 28.6)	0.62 (15.7)	Nylon 6.6	Rubber	Indoor	0.69 (315)	Natural	100
ACC62-A-D					Outdoor	1.38 (630)	Black	500
ACC62-A-D20			Heat Stabilized Weather Resistant Nylon 6.6	High Bond Acrylic			Natural	
ACC62-AV-D300								



"J" Clip

AJC25-A-C

Part Number	Max. Bundle Diameter in. (mm)	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Diameter in. (mm)	Adhesive Type	Color	Std. Pkg. Qty.
AJC25-A-C	0.25 (6.4)	1.5 (38.1)	0.97 (0.31)	7.9 (0.23)	0.23 (5.8)	Rubber Adhesive Tape	Light Gray	100

Metal Adhesive Backed Cord Clips

Part Number	Max. Bundle Diameter in. (mm)	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Material	Adhesive Type	Std. Pkg. Qty.
MACC25-A-C	0.25 (6.4)	0.77 (19.6)	0.54 (13.7)	0.29 (7.4)	Zinc Plated Steel	Rubber Adhesive Tape	100
MACC25-A-D							500
MACC62-A-D	0.62 (15.7)	1.18 (30.0)	0.78 (19.7)				



MACC25-A-C

Latching Wire Clips

Part Number	Max. Bundle Diameter in. (mm)	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Mounting Method	Color	Std. Pkg. Qty.
-------------	-------------------------------	---------------------	--------------------	---------------------	-----------------	-------	----------------

Adhesive Backed


LWC25-A-C	0.25 (6.4)	0.88 (22.2)	1.00 (25.4)	0.45 (11.4)	Rubber Adhesive	Natural	100
LWC25-A-C14						Gray	
LWC25-A-D						Natural	500
LWC38-A-C14	0.38 (9.6)	1.00 (25.4)	1.00 (25.4)	0.56 (14.2)	Rubber Adhesive	Gray	100
LWC38-A-C20						Black	
LWC38-A-D14						Gray	500
LWC50-A-L	0.5 (12.7)	1.26 (32.0)	0.67 (17.0)	0.67 (17.0)	Rubber Adhesive	Natural	50
LWC50-A-L20						Black	
LWC50-A-T						Natural	200
LWC50-A-T14						Gray	



LWC25-A-C

Push Mount

LWC75-A-C14	0.75 (19.1)	1.45 (36.8)	0.87 (22.1)	0.97 (24.7)	Push Barb	Gray	100
LWC75-H25-C						Natural	
LWC75-H25-L14						Gray	50



LWC75-A-C14

Bevel Entry Clips

Part Number	Max. Bundle Diameter in. (mm)	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Material	Suitable Environment	Mounting Method	Color	Std. Pkg. Qty.
BEC38-A-L	0.38 (9.6)	1.46 (37.1)	1.24 (31.5)	0.52 (13.2)	Nylon 6.6	Indoor	Rubber Adhesive	Natural	50
BEC62-A-T	0.62 (15.7)		1.24 (31.5)	0.79 (20.1)					200
BEC75-A-T	0.75 (19.1)		1.49 (37.8)	0.89 (22.6)					



BEC38-A-L

Adhesive Backed Latching Clips

Part Number	Max. Bundle Diameter in. (mm)	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Material	Adhesive Type	Std. Pkg. Qty.
LC10-A-L8	0.93 (23.6)	1.51 (38.4)	1.15 (38.4)	0.84 (21.3)	PVC	Light Gray	50
LC3-A-C8	0.36 (9.1)	1.00 (25.4)	1.01 (25.7)	0.61 (15.5)			100
LC5-A-C8	0.20 (5.)	0.75 (19.1)	0.78 (19.8)	0.47 (11.9)			



LC10-A-L8

Flat Cable Mounts

Part Number	Cable Width in. (mm)	Length (A) in. (mm)	Width (B) in. (mm)	Hole Spacing (C) in. (mm)	Mounting Method	Color	Std. Pkg. Qty.
-------------	-------------------------	------------------------	-----------------------	---------------------------------	--------------------	-------	----------------------

Adhesive Backed

FCM1-A-C14	1.05 (26.7)	2.90 (73.7)	1.05 (2.7)	—	Rubber Adhesive	Gray	100				
FCM1-A-T14							200				
FCM1.2-A-C14	1.2 (30.5)	3.16 (80.3)	1.37 (34.8)	1.53 (38.9)							
FCM2-A-C14	2.05 (52.1)	5.06 (128.5)	2.22 (56.4)								
FCM2-A-T14											
FCM3.25-A-T14	3.25 (82.5)	3.38 (85.8)	1.00 (25.4)	—							

Screw Mounted

FCM1.2-S6-C14	1.2 (30.5)	3.16 (80.3)	1.00 (25.4)	—	#6 (M3) Screw	Gray	100
FCM1.2-S6-T14							200




FCM1-A-C14

Flat Cable Clips

Part Number	Length (A) in. (mm)	Width (B) in. (mm)	Height (C) in. (mm)	Mounting Method	Color	Std. Pkg. Qty.
-------------	------------------------	-----------------------	------------------------	--------------------	-------	-------------------

FCC5-A-D8	1.00 (25.4)	0.59 (14.8)	0.28 (7.1)	Rubber Adhesive	Gray	500
FCC-A-C8		1.09 (27.7)	0.38 (9.7)			100
FCC-A-D8						500



FCC5-A-D8

Harness Clips

Part Number	Max. Bundle Diameter in. (mm)	Max. Panel Thickenss in. (mm)	Panel Hole Diameter in. (mm)	Material	Mounting Method	Color	Std. Pkg. Qty.
-------------	-------------------------------------	-------------------------------------	------------------------------------	----------	--------------------	-------	----------------------

HCMP06B12-M20	0.34 – 0.47 (6 – 12)	0.118 (3.0)	0.28 (7.2)	Nylon 6.6	Push Mount	Black	100
----------------------	-------------------------	-------------	------------	-----------	------------	-------	-----



HCMP06B12-M20

Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions


Terminals

Wiring Ducts

Stronghold
Contractor
Products

Quick-Build™ Starter Kit

Part Number	Description	Std. Pkg. Qty.
QB-KIT1	Starter Kit assortment that includes our core Quick-Build Comp, 221 assorted pieces	1
QB-KIT2	Starter Kit assortment that includes our core Quick-Build Comp, 145 assorted pieces	

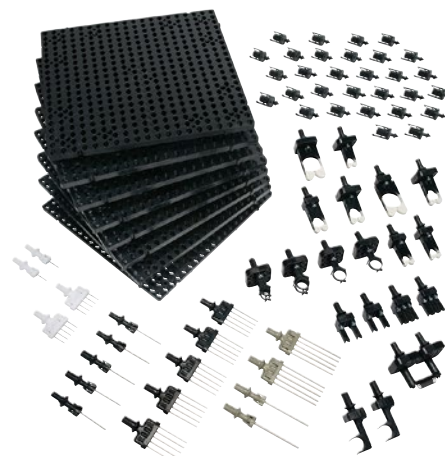

QB-KIT1

Quick-Build™ Grid Tile

Part Number	Description	Color	Std. Pkg. Qty.
QB-TILE	1 in. x 1 in. (305mm x 305mm) square base component that allows Quick-Build™ mounting pegs and platforms to create a modular harness system. One package includes 8 tiles.	Black	1



QB-TILE

Quick-Build™ Mounting Peg

Part Number	Description	Color	Std. Pkg. Qty.
QB-MOUNT-L	Peg can be positioned and relocated. Accepts single nail holders, five nail holders, and Quick-Build mounting platforms. Allows accessories to rotate as needed even after mounting peg is installed into grid tile.	Black	1



QB-MOUNT-L

Elastic Retainers – Replaceable Version

Part Number	Description	Compatible QB Components	Std. Pkg. Qty.
RER.5-S6-X	Elastic retainer with replaceable elastic band. Suitable for 0.5 in. maximum bundle capacity.	QB-BASE175-Q and QB-S6-500-C	10
RER.75-S6-X	Elastic retainer with replaceable elastic band. Suitable for 0.75 in. maximum bundle capacity.		
RER1.25-S6-X	Elastic retainer with replaceable elastic band. Suitable for 1.25 in. maximum bundle capacity.		



RER.5-S6-X

Corrugated Loom Clamps

Part Number	Description	Std. Pkg. Qty.	Paired Clamps Qty.
CLC100X1S8TL370	1-Position 1 in. Corrugated Loom Clamp	250	125
CLC100X2S8TL370	2-Position 1 in. Corrugated Loom Clamp		
CLC100X3S8C370	3-Position 1 in. Corrugated Loom Clamp	100	50
CLC62X1S8TL370	1-Position 5/8 in. Corrugated Loom Clamp	250	125
CLC62X2S8TL370	2-Position 5/8 in. Corrugated Loom Clamp		
CLC62X3S8C370	3-Position 5/8 in. Corrugated Loom Clamp	100	50
CLC75X1S8TL370	1-Position 3/4 in. Corrugated Loom Clamp	250	125
CLC75X2S8TL370	2-Position 3/4 in. Corrugated Loom Clamp		
CLC75X3S8C370	3-Position 3/4 in. Corrugated Loom Clamp	100	50
CLC88X1S8TL370	1-Position 7/8 in. Corrugated Loom Clamp	250	125
CLC88X2S8TL370	2-Position 7/8 in. Corrugated Loom Clamp		
CLC88X3S8C370	3-Position 7/8 in. Corrugated Loom Clamp	100	50



CLC100X1S8TL370



CLC100X2S8TL370



CLC100X3S8C370

High Voltage (Electric Vehicle) Cable Clamps

Part Number	Description	Diameter Range in. (mm)	Reference Cable Size ¹ AWG (mm ²)	Cable Spacing (center to center) in. (mm)	Bolt Size
HV15CC1-C376	High Voltage Cable Clamp 15-11, 1-Position, Blue-colored housing	0.43 – 0.59 (11 – 15)	4 – 2 (25 – 40)	N/A	1.4 in. (M6)
HV15CC2-C376	High Voltage Cable Clamp 15-11, 2-Position, Blue-colored housing		4 – 2 (25 – 40)	1.1 (28)	
HV19CC1-C370	High Voltage Cable Clamp 19-15, 1-Position, Black-colored housing	0.59 – 0.75 (15 – 19)	1 – 2/0 (50 – 70)		
HV19CC2-C370	High Voltage Cable Clamp 19-15, 2-Position, Black-colored housing		1 – 2/0 (50 – 70)	1.2 (30)	
HV23CC1-C378	High Voltage Cable Clamp 23-19, 1-Position, Grey-colored housing	0.75 – 0.91 (19 – 23)	3/0 – 4/0 (85 – 120)	N/A	
HV23CC2-C378	High Voltage Cable Clamp 23-19, 2-Position, Grey-colored housing		3/0 – 4/0 (85 – 120)	1.3 (34)	



HV15CC1-C376



HV15CC2-C376



HV23CC1-C378

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Pan-Clamp™ Heavy Duty Fixed Diameter Clamps

Part Number	Max. Bundle Size in. (mm)	Bundle Offset in. (mm)	Width in. (mm)	Panel Hole Size Range in. (mm)	Panel Thickness Range in. (mm)	Std. Pkg. Qty.
PC038-H25D-D0	0.38 (9.6)	0.62 (15.7)	0.62 (15.7)	0.275 – 0.288 (7.0 – 7.3)	0.055 – 0.140 (1.4 – 3.6)	100
PC050-H25D-D0	0.5 (12.7)					
PC062-H25D-D0	0.62 (15.8)					
PC075-H25D-D0	0.75 (19.1)					
PC125-H25D-C0	1.25 (31.8)					
PC100-H25D-T0	1.00 (25.4)					500
PC112-H25D-T0	1.12 (28.5)					
PC125-H25D-C0	1.25 (31.8)					25



PC075-H25D-D0

Push Mount Cord Clips

Part Number	Description	Std. Pkg. Qty.
PMCC38H25-M	Push Mount Cord Clips secure cords and cable or wire bundles easily by simply snapping them in or out of the clip. With their wing design, the mounts have added stability even when vibration is present.	1000



PMCC38H25-M

Vertical Cord Clip

Part Number	Description	Std. Pkg. Qty.
VCC25-A-M	Rubber Adhesive Backed Vertical Cord Clips are designed to hold cords, cable or wire bundles neatly and securely.	1000



VCC25-A-M

Vertical D-Ring

Part Number	Height in. (mm)	Width in. (mm)	Channel Area (in ²)	Cat. 6A (28AWG – 0.185 in.)	Cat. 6A (24AWG – 0.275 in.)	Cat. 6 (28AWG – 0.150 in.)	Cat. 6 (24AWG – 0.235 in.)
CMVDR1S	2.38 (60.5)	0.3 (83.8)	7.1	105	47	160	65



CMVDR1S

Misc. Cable Tie Mounts

Part Number	Material	Length in. (mm)	Width in. (mm)	Environment	Mounting Method	Color	Std. Pkg. Qty.
-------------	----------	-----------------	----------------	-------------	-----------------	-------	----------------

Push Rivet

KIMS-H500-M4	Nylon 6.6	0.74 (18.5)	0.49 (50.3)	Indoor	Cable Tie Mount, Push Rivet	Yellow	1000
--------------	-----------	-------------	-------------	--------	-----------------------------	--------	------

Screw-On

LPMS-S8-C	Nylon 6.6	0.74 (18.5)	0.49 (50.3)	Indoor	Cable Tie Mount, Screw-On	Natural	100
MBMS-S10-MY	Aluminum	0.14 (3.6)		Indoor/Outdoor		Natural	1000
TM2R6-C	Nylon 6.6	0.63 (16)	0.43 (10.8)	Indoor		Natural	100
TM2S8-C186	Polypropylene					Dark Blue	100
TM2S8-C71	PEEK					Brown	100
TM3S10-C76	ETFE	0.86 (21.7)	0.61 (15.5)			Aqua	100
TM3S2510-M39	Heat-Stabliized Nylon 6.6					Natural	1000
TM3S8-C186	Polypropylene					Dark Blue	100
TM3S8-C76	ETFE					Aqua	100
TMWCS6-C350	Nylon 6.6	3.2 (81.3)	8 (20.3)			Black	100
TP4H-D		3.08 (78.2)	0.62 (50.3)			Natural	5000

Adhesive Tape

SMS-A-D15	ABS	2.06 (52.3)	0.49 (50.3)	Indoor	Cable Tie Mount, Adhesive Tape	Ivory	500
-----------	-----	-------------	-------------	--------	--------------------------------	-------	-----

Push-in Mount

TCM1X63-2S-D350	Nylon 6.6	7.4 (188)	0.75 (19.1)	Indoor/Outdoor	Cable Tie Mount, Push-in Mount	Black	500
TCM1X63-D350		1.13 (28.6)					

Harness Mount

THM1SC-M30	Heat-Stabilized Nylon 6.6	0.98 (24.8)	0.38 (9.7)	Indoor	Cable Tie Mount, Harness Mount	Black	1000
------------	---------------------------	-------------	------------	--------	--------------------------------	-------	------

Cable Tie Mount

TM2PWH25-M	Nylon 6.6	0.71 (18.1)	0.61 (15.4)	Indoor	Cable Tie Mount, Push Barb	Natural	1000
TM2S8-C76						Aqua	100

Antimicrobial Met-Det Cable Tie Mounts

Part Number	Used With Cable Ties	Length in. (mm)	Width in. (mm)	Height in. (mm)	Counterbore Diameter in. (mm)	Mounting Method	Resistance Properties	Bacteria Resistance-Antimicrobial Properties	Color	Std. Pkg. Qty.
TM2S8-C96A	Min., Int., Std.	0.422 (10.7)	0.63 (16.0)	0.375 (7.0)	0.325 (8.3)	#8 (M4) Screw	Chemical Resistance	Good	Blue	100
TM3S8-C96A	Std., Lt. Hvy	0.614 (15.4)	8867 (22.0)	0.373 (9.8)						
TM3S10-C96A				0.373 (9.8)	0.385 (9.8)	#10 (M5) Screw				



KIMS-H500-M4



MBMS-S10-MY



TM2S8-C186



TM2S8-C71



TM3S10-C76



TM3S2510-M39



SMS-A-D15



TCM1X63-2S-D350



THM1SC-M30



TM2PWH25-M



TM2S8-C96A

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

IDENTIFICATION

PXE™ Label Cassettes	109
TDP43ME Thermal Transfer Desktop Printers	115
Ribbons for Use with the TDP43ME Thermal Transfer Desktop Printer	115
TDP43HET and TDP46HET Thermal Transfer Desktop Printers	116
Ribbons for Use with the TDP43HET and TDP46HET Thermal Transfer Desktop Printers	116
Self-Extinguishing Self-Laminating Labels	116
Thermal Transfer Turn-Tell® Labels	116
Thermal Transfer Self-Laminating Labels	117
Thermal Transfer, Military Grade, Single-Sided, Heat Shrink Labels	118
Thermal Transfer Continuous Tape	119
Laser/Ink Jet Self-Laminating Labels	119
Stainless Steel Marker Plates	120
PES400 Embossing System	120
Indoor/Outdoor Embossing Tape System	120
Component Labels	120
Halogen-Free Flame-Retardant Marker Plates	121
Standard Marker Plates	121
Non-Laminated Vinyl Cloth Labels	121
LabelCore® Fiber Optic Cable Identification System	121
Self-Laminating Cable Marker Holders for Large Cables or Cable Bundles	121

PXE™ Label Cassettes



R100X075V1M

Turn-Tell® Label Cassettes

Part Number	Description	Qty. of Labels per Cassette	Printer Compatibility				Width in. (mm)	Length in. (mm)	Min Cable O.D. in. (mm)	Max Cable O.D. in. (mm)	Wire/Cable Size Range	Std. Pkg. Qty.	Std. Ctn. Qty.
			MP75	MP100	MP200	MP300							
R100X075V1M	PXE Cassette, TurnTell Self-Laminating Label, Vinyl, 1.00 in. W x 0.75 in. H, 0.25 in. Print On Area	175	N	N	N	Y	1.00 (25.4)	0.75 (19.1)	0.12 (3.1)	0.16 (4.1)	Cat. 6 28 AWG/ 18 – 14 AWG	1	5
R100X125V1M	PXE Cassette, TurnTell Self-Laminating Label, Vinyl, 1.00 in. W x 1.25 in. H, 0.38 in. Print On Area	125						1.25 (31.8)	0.16 (4.1)	0.22 (5.6)	Cat. 3 UTP/ 12 – 10 AWG		
R100X150V1M	PXE Cassette, TurnTell Self-Laminating Label, Vinyl, 1.00 in. W x 1.5 in. H, 0.5 in. Print On Area	100						1.5 (38.1)	0.22 (5.6)	0.28 (7.1)	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP		
R100X225V1M	PXE Cassette, TurnTell Self-Laminating Label, Vinyl, 1.00 in. W x 2.25 in. H, 0.75 in. Print On Area	75						2.25 (57.2)	0.28 (7.1)	0.39 (9.9)	Cat. 6 FTP/ Cat. 6 UTP/ Cat. 6A FTP/8-4 AWG		



S000X100VAM

Continuous Self-Laminating Label Cassettes

Part Number	Description	Qty. of Labels per Cassette	Printer Compatibility				Width in. (mm)	Length in. (mm)	Min Cable O.D. in. (mm)	Max Cable O.D. in. (mm)	Wire/Cable Size Range	Std. Pkg. Qty.	Std. Ctn. Qty.
			MP75	MP100	MP200	MP300							
S000X100VAM	PXE Cassette, Continuous Self-Laminating Tape, Vinyl, 1.0 in. W x 26 in. L	N	Y	Y	Y	0.945 (24.0)	26.2 (8.0)	0.315 (8.0)	0.10 (2.5)	0.20 (5.1)	12 – 10 AWG	1	5
S000X150VAM	PXE Cassette, Continuous Self-Laminating Tape, Vinyl, 1.0 in. W x 26 in. L, White		N	N		1.417 (36.0)		0.512 (13.0)	0.16 (4.0)	0.32 (8.1)	Cat. 5e/ Cat. 6		

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products



S050X075VAM




S100X400VAM

Die-Cut Self-Laminating Label Cassettes

Part Number	Description	Qty. of Labels per Cass-ette	Printer Compatibility				Width in. (mm)	Length in. (mm)	Print-On Area Height in. (mm)	Min Cable O.D. in. (mm)	Max Cable O.D. in. (mm)	Wire/Cable Size Range	Std. Pkg. Qty.	Std. Ctn. Qty.
			MP75	MP100	MP200	MP300								
S050X075VAM	PXE Cassette, Self-Laminating Label, Vinyl, 0.50 in. W x 0.75 in. H, 0.25 in. Print On Area	425						0.75 (19.1)	0.25 (6.4)	0.08 (2.0)	0.16 (4.0)	Cat. 6 28 AWG/ 18 – 14 AWG		
S050X125VAM	PXE Cassette, Self-Laminating Label, Vinyl, 0.50 in. W x 1.25 in. H, 0.38 in. Print On Area	200					0.50 (12.7)	1.25 (31.8)	0.38 (9.7)	0.12 (3.1)	0.28 (7.0)	Cat. 3 UTP/ 12 – 10 AWG		
S050X150VAM	PXE Cassette, Self-Laminating Label, Vinyl, 0.50 in. W x 1.50 in. H, 0.50 in. Print on Area	175						1.50 (38.1)	0.50 (12.7)	0.16 (4.0)	0.32 (8.1)	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG		
S100X075VAM	PXE Cassette, Self-Laminating Label, Vinyl, 0.50 in. W x 0.75 in. H, 0.25 in. Print On Area	300						0.75 (19.1)	0.25 (6.4)	0.08 (2.0)	0.16 (4.0)	Cat. 6 28 AWG/ 18 – 14 AWG		
S100X125VAM	PXE Cassette, Self-Laminating Label, Vinyl, 0.50 in. W x 1.25 in. H, 0.38 in. Print On Area	200	N	N	N	Y		1.25 (31.8)	0.38 (9.7)	0.12 (3.1)	0.28 (7.0)	Cat. 3 UTP/ 12 – 10 AWG	1	5
S100X150VAM	PXE Cassette, Self-Laminating Label, Vinyl, 0.50 in. W x 1.50 in. H, 0.50 in. Print on Area	175					1.00 (25.4)	1.50 (38.1)	0.50 (12.7)	0.16 (4.0)	0.32 (8.1)	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP/ Cat. 5e FTP/ 10 – 6 AWG		
S100X225VAM	PXE Cassette, Self-Laminating Label, Vinyl, 1.00 in. W x 2.25 in. H, 0.75 in. Print On Area	125						2.25 (57.2)	0.75 (19.1)	0.24 (6.1)	0.48 (12.2)	Cat. 6 FTP/ Cat. 6A UTP/ Cat. 6A FTP/ 8 – 4 AWG		
S100X400VAM	PXE Cassette, Self-Laminating Label, Vinyl, 1.00 in. W x 4.00 in. H, 1.00 in. Print On Area	70						4.00 (101.6)	1.00 (25.4)	0.32 (8.1)	0.95 (24.3)	2 – 1 AWG		
S100X650VAM	PXE Cassette, Self-Laminating Label, Vinyl, 1.00 in. W x 6.50 in. H, 1.50 in. Print On Area	45						6.50 (165.1)	1.50 (38.1)	0.48 (12.2)	1.59 (40.4)	1/0-250 MCM		



H000X025H1M



H000X134HPM

Continuous Heat Shrink Label Cassettes

Part Number	Description	Shrink Ratio	Mil Spec	Printer Compatibility				Width in. (mm)	Length in. (mm)	Min Cable O.D. in. (mm)	Max Cable O.D in. (mm)	Wire/ Cable Size Range	Ribbon & Material Color	Std. Pkg. Qty.	Std. Ctn. Qty.	
				M75	MP 100	MP 200	MP 300									
H000X025H1M	PXE Cassette, Continuous Heat Shrink Tubing, Mil Grade Polyolefin, 0.25 in. W x 8.0 ft. L	3:1	Y	Y	Y	Y	Y	0.27 (6.8)	8.2 (2.5)	0.06 (1.4)	0.16 (4.1)	22 – 18 AWG	Black on White	1	5	
H000X025H2M	Black on Yellow							5								
H000X034H1M	PXE Cassette, Continuous Heat Shrink Tubing, Mil Grade Polyolefin, 0.34 in. W x 8.0 ft. L							0.37 (9.3)		0.07 (1.9)	0.22 (5.7)	18 – 22 AWG	Black on White		5	
H000X034H2M	Black on Yellow															
H000X044H1M	PXE Cassette, ContinuousHeat Shrink Tubing, Mil Grade Polyolefin, 0.44 in. W x 8.0 ft. L		Y	Y				0.48 (12.3)		0.09 (2.4)	0.30 (7.6)	16 - 8 AWG	Black on White		5	
H000X044H2M	Black on Yellow															
H000X064HPM	PXE Cassette, 2:1 Continuous Heat Shrink Tubing, Polyolefin, 0.64 in. W x 8.0 ft. L	2:1	N	N	Y	Y	Y	0.71 (18)	0.21 (5.3)	0.43 (10.9)	8 – 2 AWG	Black on White	5			
H000X064HXM	Black on Yellow															
H000X084HPM	PXE Cassette, 2:1 Continuous Heat Shrink Tubing, Polyolefin, 0.84 in. W x 8.0 ft. L							0.87 (22.5)	0.32 (8.1)	0.54 (13.7)	4 – 1 AWG	Black on White		5		
H000X084HXM	Black on Yellow															
H000X134HPM	PXE Cassette, 2:1 Continuous Heat Shrink Tubing, Polyolefin, 1.34 in. W x 8.0 ft. L							N	N	1.34 (34)	0.43 (10.9)	0.79 (20.1)		1 – 250 MCM AWG	Black on White	5
H000X134HXM	Black on Yellow															

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products



T024X000BPM-BK

Continuous Tape Label Cassettes

Part Number	Description	Printer Compatibility				Width in. (mm)	Length in. (mm)	Ribbon & Material Color	Std. Pkg. Qty.	Std. Ctn. Qty.
		M75	MP100	MP200	MP300					
T024X000BPM-BK	PXE Cassette, Continuous Tape, Polyester, 0.24 in. W x 30 ft. L	Y	Y	Y	Y	0.229 (5.8)	30 (9.1)	Black on White	1	5
T038X000VPM-BK	PXE Cassette, Continuous Tape, Vinyl, 0.38 in. W x 23 ft. L					0.354 (9.0)	23 (7.0)			
T038X000BPM-BK	PXE Cassette, Continuous Tape, Polyester, 0.38 in. W x 30 ft. L						30 (9.1)	Black on Yellow		
T038X000VXM-BK	PXE Cassette, Continuous Tape, Vinyl, 0.38 in. W x 23 ft. L						23 (7.0)			
T038X000BXM-BK	PXE Cassette, Continuous Tape, Polyester, 0.38 in. W x 30 ft. L						30 (9.1)	White on Back		
T038X000YKM-BK										
T038X000BYM-WH										
T050X000VPM-BK	PXE Cassette, Continuous Tape, Vinyl, 0.50 in. W x 23 ft. L					0.472 (12.0)	23 (7.0)	Black on White		
T050X000BPM-BK	PXE Cassette, Continuous Tape, Polyester, 0.50 in. W x 30 ft. L						30 (9.1)			
T050X000VXM-BK	PXE Cassette, Continuous Tape, Vinyl, 0.50 in. W x 23 ft. L						23 (7.0)	Black on Yellow		
T050X000BXM-BK	PXE Cassette, Continuous Tape, Polyester, 0.50 in. W x 30 ft. L						30 (9.1)			
T050X000YKM-BK								White on Back		
T050X000BYM-WH										
T075X000VPM-BK	PXE Cassette, Continuous Tape, Vinyl, 0.75 in. W x 23 ft. L	0.710 (18.0)	23 (7.0)	Black on White						
T075X000BPM-BK	PXE Cassette, Continuous Tape, Polyester, 0.75 in. W x 30 ft. L		30 (9.1)							
T075X000VXM-BK	PXE Cassette, Continuous Tape, Vinyl, 0.75 in. W x 23 ft. L		23 (7.0)	Black on Yellow						
T075X000BXM-BK	PXE Cassette, Continuous Tape, Polyester, 0.75 in. W x 30 ft. L		30 (9.1)		Black on Clear					
T075X000YKM-BK				White on Back						
T075X000BYM-WH										
T100X000MPM-BK	PXE Cassette, Continuous Tape, Magnetic, 1.00 in. W x 4.9 ft. L		4.9 (1.5)		Black on White					
T100X000MXM-BK					Black on Yellow					

Continued on next page.



T100X000YKM-BK

T150X000BYM-WH

Continuous Tape Label Cassettes, continued

Part Number	Description	Printer Compatibility				Width in. (mm)	Length in. (mm)	Ribbon & Material Color	Std. Pkg. Qty.	Std. Ctn. Qty.
		M75	MP100	MP 200	MP300					
T100X000VPM-BK	PXE Cassette, Continuous Tape, Vinyl, 1.00 in. W x 23 ft. L	N	Y	Y	0.945 (24.0)	23 (7.0)	Black on White	1	5	
T100X000BPM-BK	PXE Cassette, Continuous Tape, Polyester, 1.00 in. W x 30 ft. L					4.9 (1.5)				
T100X000VXM-BK	PXE Cassette, Continuous Tape, Vinyl, 1.00 in. W x 23 ft. L					23 (7.0)	Black on Yellow			
T100X000BXM-BK	PXE Cassette, Continuous Tape, Polyester, 1.00 in. W x 30 ft. L					30 (9.1)				
T100X000YKM-BK	PXE Cassette, Continuous Tape, Polyester, 1.00 in. W x 30 ft. L					23 (7.0)	Black on Clear			
T100X000BQM-WH						30 (9.1)	White on Blue			
T100X000BSM-WH							White on Green			
T100X000BUM-BK							Black on Orange			
T100X000BWM-WH							White on Red			
T100X000BYM-WH						White on Back				
T150X000MPM-BK	MP Cassette, Continuous Tape, Magnetic, 1.50 in. W x 4.9 ft. L	N	N	Y	1.471 (36.0)	4.9 (1.5)	Black on White	1	5	
T150X000MXM-BK	Black on Yellow									
T150X000BPM-BK	MP Cassette, Continuous Tape, Polyester, 1.50 in. W x 30 ft.L					30 (9.1)	Black on White			
T150X000VXM-BK	MP Cassette, Continuous Tape, Vinyl, 1.50 in. W x 23 ft. L					23 (7.0)	Black on Yellow			
T150X000BXM-BK	MP Cassette, Continuous Tape, Polyester, 1.50 in. W x 30 ft. L					30 (9.1)				Black on Clear
T150X000YKM-BK							White on Blue			
T150X000BQM-WH							White on Green			
T150X000BSM-WH							Black on Orange			
T150X000BUM-BK							White on Red			
T150X000BWM-WH							White on Back			
T150X000BYM-WH										
T150X000VPM-BK	MP Cassette, Continuous Tape, Viynl, 1.50 in. W x 25 ft. L					25 (7.6)	Black on White			

Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions

Terminals

Wiring Ducts

Stronghold
Contractor
Products

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors


Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products



N050X075C1M

Nylon Cloth Tape Label Cassettes

Part Number	Description	Printer Compatibility				Width in. (mm)	Length in. (mm)	Min Cable O.D. in. (mm)	Max Cable O.D. in. (mm)	Wire Range (AWG)	Labels per Cassette	Ribbon & Material Color	Std. Pkg. Qty.	Std. Ctn. Qty.
		MP75	MP100	MP200	MP300									
N050X075C1M	PXE Cassette, Comp Label, Adhesive Nylon Cloth					0.50 (12.7)								
N100X075C1M	PXE Cassette, Comp Label, Adhesive Nylon Cloth	N	N	N	Y		0.75 (19.1)	0.12 (3.1)	0.16 (4.1)	12-10 AWG	275	Black on White	1	5
N100X125C1M	PXE Cassette, Comp Label, Adhesive Nylon Cloth					1.00 (25.4)	1.25 (31.8)	0.2 (5.1)	0.32 (8.1)	10-6 AWG	180			



T050X000C1M-BK

Continuous Nylon Cloth Tape Label Cassettes

Part Number	Description	Printer Compatibility				Width in. (mm)	Length in. (mm)	Print -On Area Color	Std. Pkg. Qty.	Std. Ctn. Qty.
		M75	MP100	MP 200	MP300					
T050X000C1M-BK	PXE Cassette, Continuous Tape, Nylon Cloth	Y				0.465 (11.82)	19 (6.0)	Black on White	1	5
T075X000C1M-BK			N	Y	Y	0.702 (17.82)				
T100X000C1M-BK		N				0.938 (23.82)				



M300X050Y6M

Marker Plate Label Cassettes

Part Number	Description	Printer Compatibility				Width in. (mm)	Length in. (mm)	Print -On Area Width in. (mm)	Recommended Cable Tie Vertical & Horizontal	Labels per Cassette	Ribbon & Material Color	Std. Pkg. Qty.	Std. Ctn. Qty.
		MP75	MP100	MP200	MP300								
M300X050Y6M	PXE Cassette, Marker Plate, Polyester	N	N	N	Y	3.00 (76.2)	0.50 (12.7)	1.80 (45.7)	PLT2.5I-C	65	Black on Yellow	1	5
M300X050Y7M											Black on White		

Non-Adhesive Polyester Component Labels

Part Number	Description	Printer Compatibility				Width in. (mm)	Length in. (mm)	Labels per Cassette	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
		MP75	MP100	MP200	MP300						
C195X040Y1M	PXE Cassette, Comp Label, Non-Adhesive Polyester	N	N	N	Y	1.95 (49.5)	0.4 (10.2)	125	White	1	5
C261X035Y1M	PXE Cassette, Comp Label, Non-Adhesive Polyester					2.61 (66.3)	0.35 (8.9)	100			



C195X040Y1M

Continuous Terminal Block Label Cassettes

Part Number	Description	Printer Compatibility				Width in. (mm)	Length in. (mm)	Print-On Area Color	Std. Pkg. Qty.	Std. Ctn. Qty.
		MP75	MP100	MP200	MP300					
T024X000FJM-BK	PXE Cassette, Continuous Tape, Polyolefin, 0.24 in. W x 23 ft. L	Y	Y	Y	Y	0.229 (5.82)	23 (7)	Black on White	1	5
T038X000FJM-BK	PXE Cassette, Continuous Tape, Polyolefin, 0.38 in. W x 23 ft. L					0.347 (8.82)				



T024X000FJM-BK

TDP43ME Thermal Transfer Desktop Printers

Part Number	Description	Std. Pkg. Qty.
TDP43ME	300 dpi printer; includes printer, Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, and driver disk; for use in North America	1
TDP43ME-KIT	TDP43ME printer kit. Includes: printer, Easy-Mark Plus™ Labeling Software, RMEH4BL black hybrid ribbon, AC power adapter with US power cord, USB cable, user manual, quick start card, TDP43ME-RS Roll Stand, TDP43ME-CASE, one roll of S100X150VATY labels, and driver disk; for use in North America	



TDP43ME

Ribbons for Use with the TDP43ME Thermal Transfer Desktop Printer

Part Number	Description	Width in. (mm)	Length ft. (m)	Std. Pkg. Qty.
RMEH4BL	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell®, and vinyl cloth labels	4.25 (108.0)	300.0 (91.4)	1
RMER4BL	Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels"			
RHEH1BL-PLA	WrapID™ Thermal Transfer Ribbon is for use with TDP43ME printers and PLA-100 Label Applicator self-laminating labels.			



RMEH4BL

TDP43HET and TDP46HET Thermal Transfer Desktop Printers

Part Number	Description	Std. Pkg. Qty.
TDP43HET	The TDP43HET Desktop Printer for North American usage has 300 dpi printer and includes Easy-Mark™ Plus Labeling Software, and RHEH4BL black hybrid ribbon, a USB cable, user manual, quick start card, driver disk, and a US power cord	1
TDP46HET	The TDP46HET Desktop Printer for North American usage has 600 dpi printer and includes Easy-Mark™ Plus Labeling Software, RHEH4BL black hybrid ribbon, a USB cable, user manual, quick start card, driver disk, and a US power cord	



TDP43HET

Ribbons for use with the TDP43HET and TDP46HET Thermal Transfer Desktop Printers

Part Number	Description	Width in. (mm)	Length ft. (m)	Std. Pkg. Qty.
RHEH4BL	Black hybrid thermal transfer ribbon. Use with heat shrink, self-laminating, Turn-Tell® Labels, and vinyl cloth and tan polyimides labels	4.33 (110.0)	1181.0 (363.0)	1
RHER4BL	Black resin thermal transfer ribbon. Use with polyester labels, continuous vinyl tape, marker plates, and raised panel labels			



RHEH4BL

Self-Extinguishing Self-Laminating Labels

Part Number	Width in. (mm)	Length ft. (m)	Print-On Area Height in. (mm)	Min. Cable O.D. in. (mm)	Max. Cable O.D. in. (mm)	Wire Range AWG	Print-On Area Color	Labels Per Row	Std. Pkg. Qty.
S050X150TAT-A	0.5 (12.7)	1.50 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	10 – 6	White	8	5000

Thermal Transfer Turn-Tell® Labels

Part Number	Width in. (mm)	Length ft. (m)	Print-On Area Height in. (mm)	Min. Cable O.D. in. (mm)	Max. Cable O.D. in. (mm)	Wire Range AWG	Print-On Area Color	Labels Per Row	Labels Per Pkg.
R100X150V1T	1.00 (25.4)	1.50 (38.1)	0.50 (12.7)	0.22 (5.6)	0.28 (7.1)	Cat. 5e UTP/ Cat. 6 UTP/ Cat. 6A UTP	White	4	2500
R100X225V1T		2.25 (57.2)	0.75 (19.1)			Cat. 6 FTP/ Cat. 6 UTP/ Cat. 6A FTP			
R150X150V1T	1.50 (38.1)	1.5 (38.1)	0.5 (12.7)	0.28 (7.1)	0.39 (9.9)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/ Cat. 5e FTP		4	1000
R150X225V1T		2.25 (57.2)	0.75 (19.1)			8-4 AWG Cat. 6 UTP Cat. 6/6A FTP			
R150X400V1T		4.0 (101.6)	1.0 (25.4)	0.39 (9.9)	0.95 (24.1)	2-1 AWG			
R200X225V1T		2.25 (57.2)	0.75 (19.1)	0.22 (5.6)	0.28 (7.1)	Cat. 6 FTP/ Cat. 6A UTP/ Cat. 6A FTP			



R100X150V1T



S050X075VA1Y



S100X250VATY



S200X250VATY

Thermal Transfer Self-Laminating Labels

Part Number	Width in. (mm)	Length ft. (m)	Print-On Area Height in. (mm)	Min. Cable O.D. in. (mm)	Max. Cable O.D. in. (mm)	Wire Range AWG	Print- On Area Color	Labels Per Row	Std. Pkg. Qty.			
S050X075VA1Y	0.5 (12.7)	0.75 (19.1)	0.25 (6.4)	0.08 (2.0)	0.16 (4.1)	Cat. 6 28 AWG/18 – 14 AWG	White	8	5000			
S050X075VATY						Cat. 6 28 AWG/18 – 14 AWG						
S050X125VA1Y		1.25 (31.8)	0.38 (9.7)	0.12 (3.1)	0.28 (7.0)	Cat. 3 UTP/12 - 10 AWG						
S050X125VATY						Cat. 3 UTP/12 - 10 AWG						
S050X150VA1Y		1.50 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG						
S050X150VATY						Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG						
S075X125VATY	0.75 (19.1)	1.25 (31.8)	0.8 (9.7)	0.12 (3.1)	0.28 (7.0)	Cat. 3 UTP/12 -10 AWG		5				
S075X150VATY		1.50 (38.1)	—	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG						
S100X125VA1Y	1.00 (25.4)	1.25 (31.8)	0.38 (9.7)	0.12 (3.1)	0.28 (7.0)	Cat. 3 UTP/12 – 10 AWG		4	2500			
S100X125VATY						Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG			5000			
S100X150VA1Y		1.50 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG			2500			
S100X150VATY						Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG			5000			
S100X150VBTY						Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG						
S100X225VA1Y		2.25 (57.2)	0.75 (19.1)	0.24 (6.1)	0.48 (12.1)	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG						
S100X225VATY						Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG						
S100X250VATY		2.50 (63.5)	1.00 (25.4)	0.32 (8.1)	0.95 (24.3)	6 – 2 AWG						
S100X400VA1Y		4.00 (101.6)				2 – 1 AWG			1000			
S100X400VATY						2 – 1 AWG			2500			
S100X650VATY		6.50 (165.1)	1.50 (38.1)	0.48 (12.1)	1.59 (40.4)	1/0 – 250 MCM			1000			
S150X150VATY	1.50 (38.1)	1.50 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG		5000				
S150X225VATY		2.25 (57.2)	0.75 (19.1)	0.24 (6.1)	0.48 (12.1)	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG						
S150X400VATY		4.00 (101.6)	1.00 (25.4)	0.32 (8.1)	0.95 (24.3)	2 – 1 AWG			2500			
S200X150VATY	2.00 (50.8)	1.50 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG		2	5000			
S200X225VA1Y		2.25 (57.2)	0.75 (19.1)	0.24 (6.1)	0.48 (12.1)	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG			500			
S200X225VATY						Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG			1000			
S200X250VATY		2.50 (63.5)	1.00 (25.4)	0.32 (8.1)	0.95 (24.3)	6 – 2 AWG			500			
S200X400VA1Y		4.00 (101.6)				2 – 1 AWG			1000			
S200X400VATY						2 – 1 AWG			250			
S200X650VA1Y		6.50 (165.1)				1/0 – 250 MCM			1000			
S200X650VATY		1.50 (38.1)	0.48 (12.1)	1.59 (40.4)	1/0 – 250 MCM							



H050X025H1T



H200X025H1T-B

Thermal Transfer, Military Grade, Single-Sided, Heat Shrink Labels

Part Number	Diameter in. (mm)	Width in. (mm)	Length ft. (m)	Min. Cable O.D. in. (mm)	Max. Cable O.D. in. (mm)	Wire Range AWG	Labels Per Row	Labels Per Roll	Available in Bulk	Color	Std. Pkg. Qty. (Roll)			
H050X025H1T	0.13 (3.1)	0.5 (12.7)	0.25 (6.4)	0.04 (1.0)	0.13 (3.3)	22 – 18	2	1000	N	White	1			
H050X025H1T-B									Y					
H050X034H1T	0.19 (4.7)		0.34 (8.6)	0.06 (1.5)	0.19 (4.8)	18 – 12			N					
H050X034H1T-B									Y					
H050X044H1T	0.25 (6.3)		0.44 (11.2)	0.08 (2.0)	0.25 (6.4)	16 – 10			N					
H050X044H1T-B									Y					
H075X025H1T	0.75 (19.1)	0.25 (6.4)	0.04 (1.0)	0.13 (3.3)	22 – 18	N								
H075X034H1T-B		0.19 (4.7)	0.34 (8.6)	0.06 (1.5)	0.19 (4.8)	18 – 12			Y					
H075X044H1T		0.25 (6.3)	0.44 (11.2)	0.08 (2.0)	0.25 (6.4)	16 – 10			N					
H075X044H1T-B									Y					
H100X025H1T	0.13 (3.1)	1.00 (25.4)	0.25 (6.4)	0.04 (1.0)	0.13 (3.3)	22 – 18			N					
H100X025H1T-B									Y					
H100X034H1T	0.19 (4.7)		0.34 (8.6)	0.06 (1.5)	0.19 (4.8)	18 – 12			N					
H100X034H1T-B									Y					
H100X034H2T									N					
H100X044H1T	0.25 (6.3)		0.44 (11.2)	0.08 (2.0)	0.25 (6.4)	16 – 10			Y					
H100X044H1T-B									N					
H100X044H2T-B									Y					
H100X064H1T	0.38 (9.7)	0.64 (16.3)	0.13 (3.3)	0.38 (9.7)	12 – 6	500		N	White					
H100X084H1T	0.5 (12.7)									0.84 (21.3)		0.26 (6.6)	0.95 (24.1)	8 – 1
H100X165H1T	1.00 (25.4)													
H150X034H1T	0.19 (4.7)	1.50 (38.1)	0.34 (8.6)	0.06 (1.5)	0.19 (4.8)			18 – 12		Y				
H150X034H1T-B	0.25 (6.3)									0.44 (11.2)		0.08 (2.0)	0.25 (6.4)	16 – 10
H150X044H1T			Y											
H150X044H1T-B	N													
H200X025H1T	0.13 (3.1)	2.00 (50.8)	0.25 (6.4)	0.04 (1.0)	0.13 (3.3)			22 – 18		Y				
H200X025H1T-B										N				
H200X034H1T	0.19 (4.7)		0.34 (8.6)	0.06 (1.5)	0.19 (4.8)			18 – 12		Y				
H200X034H1T-B										N				
H200X044H1T										0.25 (6.3)		0.44 (11.2)	0.08 (2.0)	0.25 (6.4)
H200X044H1T-B	N													
H200X044H2T	N													
H200X064H1T	0.38 (9.7)		0.64 (16.3)	0.13 (3.3)	0.38 (9.7)			12 – 6	Y					
H200X064H1T-B									N					
H200X084H1T									0.5 (12.7)	0.84 (21.3)		0.26 (6.6)	0.95 (24.1)	8 – 1
H200X165H1T	1.00 (25.4)		1.65 (41.9)	0.62 (12.1)	1.06 (48.2)			4-500 MCM	N					
H200X240H1T	1.5 (38.1)		2.4 (61)	1.20 (24.2)	1.12 (116.4)			1-1000 MCM						

Continued on next page

Thermal Transfer, Military Grade, Double-Sided, Heat Shrink Labels, continued

				Min. Cable O.D. in. (mm)	Max. Cable O.D. in. (mm)	Wire Range AWG	Labels Per Row	Labels Per Roll	Available in Bulk		Std. Pkg. Qty. (Roll)
Part Number	Diameter in. (mm)	Width in. (mm)	Length ft. (m)							Color	
H100X122H1T-2	0.5 (12.7)	1.00 (25.4)	0.84 (21.3)	0.26 (6.6)	0.95 (24.1)	8 – 1	2	1000	N	White	1
H200X044H1T-2-B	0.25 (6.3)	2.00 (50.8)	0.44 (11.2)	0.08 (2.0)	0.25 (6.4)	16 – 10		500	Y		
H200X084H1T-2-B	0.5 (12.7)		0.84 (21.3)	0.26 (6.6)	0.95 (24.1)	8 – 1					



H100X122H1T-2

Thermal Transfer Continuous Tape

Part Number	Material	Width in. (mm)	Length ft. (m)	Color	Std. Pkg. Qty. (Roll)
T400X000YP1	Super-Tack Polyester	4.00 (101.6)	100.0 (30.5)	White	1



T400X000YP1

Laser/Ink Jet Self-Laminating Labels

Part Number	Width in. (mm)	Length ft. (m)	Print-On Area Height in. (mm)	Min. Cable O.D. in. (mm)	Max. Cable O.D. in. (mm)	Wire Range AWG	Print-On Area Color	Labels Per Pkg.
S050X075YAJ	0.5 (12.7)	0.75 (19.1)	0.25 (6.4)	0.08 (2.0)	0.16 (4.1)	18 – 14 AWG	White	5000
S050X125YAJ		1.25 (31.8)	0.38 (9.6)	0.12 (3.0)	0.28 (7.1)	12 – 10 AWG		
S050X150YAJ		1.5 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	10 – 6 AWG		
S075X125YAJ	0.75 (19.0)	1.25 (31.8)	0.38 (9.6)	0.12 (3.0)	0.28 (7.1)	12 – 10 AWG		2500
S075X150YAJ		1.5 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	10 – 6 AWG		
S100X075YAJ	1.00 (25.4)	0.75 (19.1)	0.25 (6.4)	0.08 (2.0)	0.16 (4.1)	18 – 14 AWG		1000
S100X125YAJ		1.25 (31.8)	0.38 (9.6)	0.12 (3.0)	0.28 (7.1)	Cat. 3 UTP/12 – 10 AWG		
S100X150YAJ		1.5 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP/Cat. 5e FTP/10 – 6 AWG		
S100X150YBJ					0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP /Cat. 5e FTP/ 10 – 6 AWG	TIA Blue	
S100X160YAJ		1.6 (40.6)	0.8 (20.3)	0.25 (6.4)	0.25 (6.4)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP /Cat. 5e FTP/10 – 6 AWG	White	2500
S100X220YAJ		2.2 (55.9)	1.1 (27.9)	0.35 (8.9)	0.35 (8.9)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP /Cat. 5e FTP/10 – 6 AWG		
S100X225YAJ		2.25 (57.2)	0.75 (19.1)	0.24 (6.1)	0.48 (12.1)	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG		
S100X400YAJ		4.00 (101.6)	1.0 (25.4)	0.32 (8.1)	0.98 (24.3)	2 – 1 AWG		
S100X650YAJ		6.50 (165.1)	1.5 (38.1)	0.48 (12.1)	1.59 (40.4)	1/0 – 350 MCM		
S200X150YAJ		1.5 (38.1)	0.5 (12.7)	0.16 (4.1)	0.32 (8.1)	Cat. 5e UTP/Cat. 6 UTP/Cat. 6A UTP /Cat. 5e FTP/10 – 6 AWG		500
S200X225YAJ		2.25 (57.2)	0.75 (19.1)	0.24 (6.1)	0.48 (12.1)	Cat. 6 FTP/Cat. 6A UTP/Cat. 6A FTP/8 – 4 AWG		
S200X400YAJ		4.00 (101.6)	1.0 (25.4)	0.32 (8.1)	0.98 (24.3)	2 – 1 AWG		
S200X650YAJ		6.50 (165.1)	1.5 (38.1)	0.48 (12.1)	1.59 (40.4)	1/0 – 350 MCM		
R100X150X1J	1.00 (25.4)	1.5 (38.1)	0.5 (12.7)	0.5 (12.7)	0.22 (5.6)	0.28 (7.1)		1000



S050X075YAJ



R100X150X1J

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Stainless Steel Marker Plates

Part Number	Material	Length/ Diameter in. (mm)	Width/ Diameter in. (mm)	Thickness in. (mm)	Used with Pan-Steel Cable Ties	For Use with MIM, PES197, PES400	Std. Pkg. Qty.	Std. Ctn. Qty.
MMP350-C316	316 Stainless Steel	3.5 (89.0)	0.75 (19.1)	0.010 (0.25)	MLT-S	Y	500	0
MMP350-M316							1000	4000
MMP350-M	304 Stainless Steel		MLT-H					
MMP350H-MAL	Aluminum				MLT-S			
MMP350W38-M316	316 Stainless Steel		0.38 (9.7)					

PES400 Embossing Systems

Part Number	Description	Std. Pkg. Qty.
PES400	Panduit embossing system, 0.188" (5mm) and 0.118" (3mm) characters, 35.8" x 23.6" x 16.5", 154lb. (75kg), 100 to 240 VAC, 50/60Hz	1



PES400

Indoor/Outdoor Embossing Tape System

Part Number	Material	Width in. (mm)	Length in. (mm)	Thickness in. (mm)	Color
METS3-X	316 Stainless Steel	0.5 (12.7)	252 (6401)	0.01 (0.1)	Silver
METS4-X	304 Stainless Steel				



METS3-X

Component Labels

Part Number	Description	Width in. (mm)	Height in. (mm)	Labels Per Row	Std. Pkg. Qty.	Color
C100X025KBT	Polyimide Component Labels	1.00 (25.4)	0.25 (6.4)	3	10000	White
C100X050APT	Raised Panel Component Labels		0.5 (12.7)		500	
C100X050YJT	Polyester Component Labels	3.00 (76.2)	1.00 (25.4)	1	10000	
C300X100APT	Raised Panel Component Labels				500	
C300X100YJT	Polyester Component Labels	3.79 (96.3)	0.30 (7.6)	—	2500	
C379X030YPT	Super-Tack Polyester Component Labels				2500	
C400X100APT	Raised Panel Component Labels	4.00 (101.6)	1.00 (25.4)	1	500	



C100X050APT



C379X030YPT

Halogen-Free Flame-Retardant Marker Plates

Part Number	Width in. (mm)	Height in. (mm)	Print-On Area Width in. (mm)	Labels Per Roll	Std. Pkg. Qty. (Roll)	Color
M200X080UPT-B	2.0 (50.8)	0.42 (10.7)	1.30 (33.0)	2000	1	White



M200X080UPT-B

Standard Marker Plates

Part Number	Width in. (mm)	Height in. (mm)	Print-On Area Wdth in. (mm)	Labels Per Roll	Std. Pkg. Qty. (Roll)	Color
M300X050Y6T	3.00 (76.2)	0.5 (12.7)	2.07 (52.6)	500	1	TIA Yellow
M300X100Y6T		1.00 (25.4)	1.80 (45.7)			White
M300X100Y7T						



M300X050Y6T

Non-Laminated Vinyl Cloth Labels

Part Number	Width in. (mm)	Length ft. (m)	Min. Cable O.D. in. (mm)	Max. Cable O.D. in. (mm)	Wire Range AWG	Color	Labels Per Row	Std. Pkg. Qty.
N050X075CBT	0.5 (12.7)	0.75 (19.1)	0.12 (3.1)	0.16 (4.1)	12 – 10 AWG	White	7	10000
N100X075CBT	1.00 (25.4)						3	



N050X075CBT

LabelCore™ Fiber Optic Cable Identification System

Part Number	Description	Color	Std. Pkg. Qty.
NWSLC-3Y	Orange cable identification sleeve for 3mm simplex cable, 1 in. long, use with labels: S100X150YAJ (Laser/Inkjet); S100X150VAM (MP300 Hand-held Printer); S100X150VA1Y or S100X150VATY (Thermal Transfer Printer).	Orange	100
NWSLC-7Y	White cable identification sleeve for 3mm duplex fiber cable, 1 in. long, use with labels: S100X225YAJ (Laser/Inkjet); S100X225VAM (MP300 Hand-held Printer); S100X225VATY or S200X225VATY (Thermal Transfer Printer).	White	



NWSLC-3Y

Self-Laminating Cable Marker Holders for Large Cables or Cable Bundles

Part Number	Width in. (mm)	Length ft. (m)	Tags Per Pkg.	Std. Pkg. Qty.	Std. Ctn. Qty.
SLCT-WH	3.00 (76.2)	1.31 (33.3)	25	1	4



SLCT-WH

Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions

Terminals

Wiring Ducts

Stronghold
Contractor
Products

POWER CONNECTIONS

Code Conductor, One-Hole, Standard Barrel with Window Lugs.....	123
Code Conductor, One-Hole, Standard Barrel with Window, Narrow Tongue Lugs	124
Flex Conductor, One-Hole, Standard Barrel with Window, Flared NEBS Lugs	124
Code Conductor, One-Hole, Long Barrel Lugs.....	124
Code Conductor, Two-Hole, Standard Barrel with Window Lugs	124
Code Conductor, Two-Hole, Long Barrel Lugs.....	125
Code Conductor, Two-Hole, Long Barrel with Window Lugs.....	125
Code Conductor, Butt Splice.....	125
Flex Conductor, One-Hole, Standard Barrel with Window Lugs	126
Flex Conductor, Two-Hole, Standard Barrel with Window Lugs	126
Flex Conductor, Two-Hole, Long Barrel with Window Lugs	127
Code Conductor, Two-Hole, Aluminum Lugs.....	127
One-Hole, Single-Piece, Straight Fixed, Tongue Lugs	127
Code Conductor, Two-Hole, Aluminum Lugs.....	127
Tin-Plated Copper Compression Lugs, One-Hole, Standard Barrel.....	128
In-Line Splicer/Reducer with Clear Insulation	128
Multi-Tap Connectors with Clear Insulation, Single-Sided	128
CD-2001 Crimp Dies.....	129
CD-22 Crimp Dies.....	129
CD-920 Crimp Dies.....	129
Copper Code Hex Die	129
Copper Mechanical Anti-Rotational Lug.....	129
Access Floor Grounding Clamps.....	129



LCA10-10-L LCA4-14-L LCA1/0-56-X

Code Conductor, One-Hole, Standard Barrel with Window Lugs

Part Number	Copper Conductor Size	Stud Hole Size in. (AWG)	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.	
			Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.							
LCA10-10-L	14 - 10 AWG STR	#10)	0.38	0.38	0.06	1.07	—	—	—	0.4375	—	50	
LCA8-10-L	8 AWG		0.41	0.56	0.08	1.25	P21	49	21	0.6250	Red		
LCA8-14-L			0.25		0.48	0.07							1.34
LCA8-38-L			0.375		0.60	0.05							1.56
LCA6-10-L	6 AWG	#10)	0.45	0.81	0.09	1.52	P24	7	24	0.8750	Blue	50	
LCA6-14-L		0.25	0.48		0.08	1.61							
LCA6-38-L		0.375	0.62		0.06	1.83							
LCA4-14-L	4 AWG	0.25	0.55		0.09	1.63	P29	8	29	0.9375	Gray		
LCA4-56-L		0.3125			1.75								
LCA4-38-L		0.375			0.62	0.07							1.85
LCA2-14-Q	2 AWG	0.25	0.60	0.88	0.10	1.77	P33	10	33	0.9375	Brown	25	
LCA2-38-Q	1 AWG	0.375	0.66		1.97								
LCA2-12-Q	2 AWG	0.5	0.75		0.08	2.21							
LCA1-14-E	1 AWG	0.25	0.70	0.11	1.79	P37	11	37	0.9375	Green	20		
LCA1-38-E		0.375			1.99								
LCA1/0-14-X	1/0 AWG	0.25	0.76	0.94	0.12	1.95	P42	12	42	1.0000	Pink	10	
LCA1/0-38-X		0.375				2.09							
LCA1/0-56-X		0.3125				2.08							
LCA2/0-56-X	2/0 AWG	0.375	0.85	0.98	0.13	2.09	P45	13	45	1.0625	Black		
LCA2/0-38-X						2.15			54				
LCA2/0-12-X						2.40			45				
LCA4/0-12-X	4/0 AWG	0.5	1.06	1.19	0.14	2.45	P54	15	54	1.2500	Purple		10
LCA4/0-38-X		0.375				2.68							
LCA250-12-X	250 kcmil	0.5	1.17	1.25		2.55	P62	16	62	1.3125	Yellow		
LCA250-38-X		0.375				2.78							
LCA350-12-X	350 kcmil	0.5	1.28	1.44	0.17	3.09	P71	18	71	1.5000	Red	6	
LCA400-12-6	400 kcmil		1.39	1.50	0.18	3.22	P78	19	76	1.5625	Blue		
LCA500-12-6	500 kcmil		1.54	1.75	0.22	3.55	P87	20	87	1.8125	Brown		
LCA600-12-6	600 kcmil		1.70		0.26	4.20	P94	22	94		Green		

Code Conductor, One-Hole, Standard Barrel with Window, Narrow Tongue Lugs

Part Number	Copper Conductor Size	Stud Hole Size in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
			Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LCAN2/0-38-X	2/0 AWG	0.375	0.58	0.98	0.13	2.15	P45	13	45	1.0625	Black	10
LCAN250-38-X	350 kcmil		0.77	1.25	0.15	2.55	P62	16	62	1.3125	Yellow	
LCAN3/0-56-X	3/0 AWG	0.3125	0.64	1.14	0.13	2.28	P50	14	50	1.1875	Orange	
LCAN350-38-X	350 kcmil	0.375	0.88	1.44	0.17	2.98	P71	18	71	1.5000	Red	
LCAN4/0-38-X	4/0 AWG		0.71	1.19	0.15	2.45	P54	15	54	1.2500	Purple	



LCAN2/0-38-X

Flex Conductor, One-Hole, Standard Barrel with Window, Flared NEBS Lugs

Part Number	Copper Conductor Size	Stud Hole Size in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
			Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LCAF4/0-12-X	4/0 AWG	0.5	1.17	1.35	0.14	2.88	P62	16	62	1.4375	Yellow	10



LCAF4/0-12-X

Code Conductor, One-Hole, Long Barrel Lugs

Part Number	Copper Conductor Size	Stud Hole Size in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
			Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LCB4/0-12-X	4/0 AWG	0.5	1.06	1.56	0.14	3.22	P54	15	54	1.625	Purple	10



LCB4/0-12-X



LCD10-10A-L

Code Conductor, Two-Hole, Standard Barrel with Window Lugs

Part Number	Copper Conductor Size	Stud Hole Size in. (mm)	Stud Hole Spacing in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
				Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LCD10-10A-L	#14 – #10 AWG STR, #12 – #10 AWG SOL	(#10)	0.63	0.38	0.38	0.06	1.69	—	—	—	0.4375	—	50
LCD10-14A-L	#14 – #10 AWG STR, #12 – #10 AWG SOL	0.25		0.42	0.38	0.05	1.78						
LCD8-10A-L	#8 AWG	(#10)		0.41	0.56	0.08	1.88	P21	49	21	0.625	Red	
LCD8-14A-L	#8 AWG	0.25		0.48	0.56	0.07	1.97						
LCD6-10A-L	#6 AWG	(#10)		0.46	0.81	0.08	2.15	P24	7	24	0.875	Blue	
LCD6-14A-L	#6 AWG	0.25		0.48			2.24						
LCD6-14AF-L	#6 AWG						1.66						
LCD6-14D-L	#6 AWG		2.61										
LCD4-14AF-L	#6 AWG		2.26										
LCD4-14A-L	#4 – #3 AWG STR, #2 AWG SOL		0.63	0.55			0.09	1.74	P29	8	29	Gray	
LCD2-14A-Q	#2 AWG	0.6		0.88	0.1	2.4	P33	10	33	0.9375	Brown	25	

Code Conductor, Two-Hole, Long Barrel Lugs

Part Number	Copper Conductor Size	Stud Hole Size in.	Stud Hole Spacing in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg Qty
				Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LCC6-14A-L	#6 AWG	0.5	0.63	0.48	1.07	0.08	2.56	P24	7	24	1.125	Blue	50
LCC6-38D-L	#6 AWG	0.375	1.00	0.62		0.06	3.15						
LCC4-38D-L	#4 AWG				1.05	0.08	3.17	P29	8	29		Green	
LCC2-14A-Q	#2 AWG	0.25	0.63	0.60	1.16	0.10	2.77	P33	10	33	1.25	Brown	
LCC4/0-12-X	4/0 AWG	0.5	1.75	1.06	1.56	0.14	5.13	P54	15	54	1.625	Purple	
LCC350-12-X	350 kcmil			1.28	2.24	0.17	5.99	P71	18	71	32.3125	Red	
LCC400-12-6	400 kcmil			1.39	2.30	0.18	6.10	P86	19	76	2.375	Blue	
LCC500-12-6	500 kcmil			1.54	2.50	0.22	6.36	P87	20	87	2.5625	Brown	
LCC600-12-6	600 kcm			1.70	2.69	0.26	6.63	P94	22	94	2.75	Green	
LCC750-12-6	750 kcmil			1.89	2.87		7.04	P106	24	106	2.9375	Black	



LCC6-14A-L

Code Conductor, Two-Hole, Long Barrel with Window Lugs

Part Number	Fig No.	Copper Conductor Size	Stud Hole Size in. (mm)	Stud Hole Spacing in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
					W in.	B in.	T in.	L in.						
LCC10-14AW-L	1	#14 – 10 AWG STR, #12 – 10 AWG SOL	0.25	0.63	0.42	0.53	0.05	1.93	—	—	—	0.5625	—	50
LCC8-10AW-L		#8 AWG	(#10)	0.63	0.41	0.70	0.08	2.01	P21	49	2	0.75	Red	
LCC6-14AW-L	2	#6 AWG	0.25		0.48	1.07		2.49	P24	7	24	1.125	Blue	
LCC6-14JAW-L		#6 AWG	0.5	0.50-0.63	1.06	1.56	0.14	4.95	P54	15	54	1.625	Purple	10
LCC4/0-12W-X	1	4/0 AWG		1.75	1.17	1.61	0.17	5.03	P62	16	62	1.6875	Yellow	
LCC250-12W-X		250 kcmil			1.28	2.24		5.76	P71	18	71	2.3125	Red	
LCC350-12W-X		350 kcmil			1.54	2.50	0.22	6.12	P87	20	87	2.5625	Brown	
LCC500-12W-6		500 kcmil			1.7	2.69	0.26	6.36	P94	22	94	2.75	Green	6
LCC600-12W-6		600 kcmil												



LCC10-14AW-L

Code Conductor, Butt Splice

Part Number	Copper Conductor Size	Figure Dimensions		Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg Qty.
		Barrel O.D.	L in.						
Standard Barrel									
SCS6-L	#6 AWG	0.27	1.5	P21	49	21	1.0625	Red	50
Long Barrel									
SCL6-L	#6 AWG	0.31	2.38	P24	7	24	1.125	Blue	50



SCS6-L



SCL6-L



LCAX6-14-L



LCAX250-38-X

Flex Conductor, One-Hole, Standard Barrel with Window Lugs

Part Number	Flex Conductor Size		Code Conductor Size	Stud Hole Size in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
	Class G, H, I, K, M	Diesel Locomotive			Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LCAX6-14-L	#6 AWG	#6 AWG	#6 AWG	0.25	0.48	0.48	0.08	1.28	P24	7	24	0.5625	Blue	50
LCAX4-14-L	#4 AWG	#5, #4, #3 AWG	#4 AWG		0.55	0.53	0.09	1.35	P29	8	29	0.625	Gray	
LCAX2-14-E	#2 AWG	#2 AWG	#2 AWG		3.125	0.7	0.59	0.11	1.5	P33	10	33	1.0625	Brown
LCAX2-56-E				1.63										
LCAX2-38-E				1.7										
LCAX1/0-14-X	1/0 AWG	1/0 AWG	1/0 AWG	0.25	0.85	0.72	0.13	1.82	P42	12	42	0.75	Pink	10
LCAX1/0-56-X				0.3125				1.89						
LCAX1/0-38-X				0.375				1.97						
LCAX2/0-38-X	2/0 AWG	2/0 AWG	2/0 AWG	0.3125	0.96	0.83		2.03	P45	13	45	0.875	Black	
LCAX2/0-56-X				0.375										
LCAX3/0-38-X	3/0 AWG	3/0 AWG	3/0 AWG	0.375	1.06	0.91	0.18	2.17	P50	14	50	1	Orange	
LCAX4/0-14-X	4/0 AWG	4/0 AWG	4/0 AWG	0.25	1.19	1.03	0.16	2.3	P54	15	54	1.0625	Purple	
LCAX4/0-56-X				0.3125				2.53						
LCAX4/0-38-X				0.375				2.64						
LCAX4/0-12-X				0.5				2.57					P62	
LCAX250-38-X	250 kcmil	262.6 kcmil	0.375	1.28	2.68									
LCAX250-12-X				0.5										
LCAX350-38-6	350 kcmil	373.7 kcmil	—	0.375	1.54	1.26	0.22	2.93	P76	19	76H	1.375	Blue	6
LCAX350-12-6						1.29		3.09			76H			
LCAX450-12-6	450 kcmil	444.4 kcmil		0.5	1.7	1.4	0.26	3.6	P87	20	87H	1.4375	Brown	
LCAX500-12-6	500 kcmil	535.3 kcmil			1.89	1.48		3.64	P99	L99	99H	1.5625	Pink	
LCAX750-12-3	750 kcmil	777.7 kcmil				2.17	1.66	0.32	3.94	P115	L15	115H	1.75	Yellow



LCDX8-14A-L

Flex Conductor, Two-Hole, Standard Barrel with Window Lugs

Part Number	Flex Conductor Size		Code Conductor Size	Stud Hole Size in.	Stud Hole Size in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
	Class G, H, I, K, M	Diesel Locomotive				Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LCDX8-14A-L	#8 AWG	#8 AWG	#8 AWG	0.25	0.63	0.48	0.42	0.7	1.83	P24	7	24	1.125	Blue	50
LCDX6-14A-L	#6 AWG	#6 AWG	#6 AWG				0.48	0.08	1.91				0.5625		
LCDX2-14A-E	#2 AWG	#2 AWG	#2 AWG			0.7	0.59	0.11	2.13	P33	10	33	0.6875	Brown	20
LCDX4/0-14A-X	4/0 AWG	4/0 AWG	4/0 AWG			1.19	1.03	0.16	2.74	P54	15	54	1.0625	Purple	10



LCCX6-14A-L



LCCX300-12-6

Flex Conductor, Two-Hole, Long Barrel with Window Lugs

Part Number	Flex Conductor Size		Code Conductor Size	Stud Hole Size in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg Qty.
	Class G, H, I, K, M	Diesel Locomotive			Tongue Width in.	Barrel Length in.	Tongue Thick-ness in.	Overall Length in.						
LCCX6-14A-L	#6 AWG	#6 AWG	#6 AWG	0.25	0.48	1.07	0.08	2.94	P24	7	24	1.125	Blue	50
LCCX4-14A-L	#4 AWG	#4 AWG	#4 AWG		0.55	1.05	9	2.49	P29	8	29		Gray	
LCCX2-14A-E	#2 AWG	#2 AWG	#2 AWG		0.7	1.36	0.11	2.89	P33	10	33	1.4375	Brown	20
LCCX2/0-38D-X	2/0 AWG	2/0 AWG	2/0 AWG	0.375	0.96	1.5	0.13	3.7	P45	13	45	1.565	Black	10
LCCX4/0-38D-X	4/0 AWG	4/0 AWG	4/0 AWG		1.19	2.24	0.16	4.55	P54	15	54	2.3125	Purple	
LCCX4/0-12-X				5.73										
LCCX300-12-6	300 kcmil	313.1 kcmil	—	0.5	1.39	2.3	0.18	5.85	P71	18	71H	2.375	Red	6
LCCX350-12-6	350 kcmil	373.7 kcmil			1.54	2.5	0.22	6.13	P76	19	76H	2.565	Blue	
LCCX450-12-6	450 kcmil	444.4 kcmil			1.7	2.69	0.26	6.37	P87	20	87	2.75	Brown	
LCCX500-12-6	500 kcmil	535.3 kcmil			1.89	2.88		6.66	P99	L99	99H	2.9375	Pink	
LCCX650-12-6	—	646.6 kcmil			1.95	2.94	0.3	6.75	P106	24	106H	3	Black	



LAB500-12-24R

Code Conductor, Two-Hole, Aluminum Lugs

Part Number	Aluminum or Copper Conductor Size	Stud Hole Size in.	Stud Hole Spacing in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
				Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LAB500-12-24R	500 kcmil	0.5	1.75	1.62	3	0.46	0.68	P99	300	99	3.0625	Pink	2
LAB600-12-24F	600 kcmil			1.73		0.5	0.5	P106	473	106		Black	
LAB750-12-24R	750 kcmil			1.69	3.44	0.57	0.57	P125	301	125	3.4375	Red	20

One-Hole, Single-Piece, Straight Fixed Tongue Lugs

Part Number	Copper Conductor Size Range	Stud Hole Size in.	Figure Dimensions					Std Pkg. Qty.
			L in.	W in.	H in.	T in.	M in.	
CXS35-36-C	14 AWG - 6 AWG	0.1875	1.08	0.38	0.39	0.05	0.47	100
CXS70-14-C	14 AWG - 4 AWG	0.25	1.28	0.5	0.5	0.06	0.53	



CXS35-36-C

Code Conductor, Two-Hole, Aluminum Lugs

Part Number	Conductor Size Range	Stud Hole Size in.	Hex Key Size in.	Figure Dimensions						Std Pkg. Qty.
				L in.	W in.	H in.	T in.	P in.	M in.	
LAM2A600-12-6Y	#2 AWG - 600 kcmil	0.5	0.375	3.19	2	1.56	0.44	1.81	2.38	6

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products



LCA2-56-Q

Tin-Plated Copper Compression Lug, One-hole, Standard Barrel

Part Number	Copper Conductor Size	Stud Hole Size in.	Figure Dimensions				Die Index No.	Burndy Die Index No.	T&B Die Index No.	Wire Strip Length in.	Color	Std Pkg. Qty.
			Tongue Width in.	Barrel Length in.	Tongue Thickness in.	Overall Length in.						
LCA2-56-Q	2 AWG	0.3125	0.66	0.88	0.1	1.9	P33	10	10	0.3125	Brown	25
LCA3/0-38-X	3/0 AWG	0.375	0.96	1.14	0.13	2.34	P50	14	50	1.1875	Orange	10
LCAS6-14-L	6 AWG	0.25	0.48	0.48	0.08	1.28	P24	7	24	0.5625	Blue	50

In-Line Splicer/Reducer with Clear Insulation

Part Number	Copper Conductor Size Range	Figure Dimensions			Std Pkg. Qty.
		L in.	W in.	H in.	
PISR250-1	250 kcmil – #10 AWG STR, #8 AWG SOL – #10 AWG SOL	4	1.25	2.24	1



PISR250-1

Multi-Tap Connectors with Clear Insulation, Single-Sided

Part Number	Conductor Size Range	No. of Ports Hole Size in.	Figure Dimensions				Hex Key Size in.	Std Pkg. Qty.
			L in.	W in.	H in.	S in.		
PCSB4-2S-12Y	#4 – #14 AWG STR #10 – #14 AWG SOL	2	1.25	1.25	1.25	0.53	0.125	12
PCSB4-3S-12Y	#4 – #14 AWG STR #10 – #14 AWG SOL	3	1.76					
PCSB2/0-2S-6	2/0 – #14 AWG STR #10 – #14 AWG SOL	2	1.52	1.31	1.38	0.67	0.1875	6
PCSB2/0-3S-6Y	2/0 – #14 AWG STR #10 – #14 AWG SOL	3	2.19					
PCSB250-2S-6Y	250 kcmil – #10 AWG STR	2	2.03	2.0	2.13	0.94	0.3125	12
PCSB4-2-12Y	#4 – #14 AWG STR #10 – #14 AWG SOL		1.23	1.5	1.25	0.53	0.125	
PCSB2/0-2-12	2/0 – #14 AWG STR #10 – #14 AWG SOL		1.52	1.56	1.38	0.67	0.1875	
PCSB250-2-6Y	250 kcmil – #10 AWG STR		2.03	2.63	2.13	0.94	0.3125	6
PCSB250-3-6Y	250 kcmil – #10 AWG STR	3	2.97					



PCSB4-2S-12Y

CD-2001 Crimp Dies

Part Number	Conductor Size Range	Material	Die Index Number	Finishing/Coating	Color Code	Std Pkg. Qty.
CD-2001-1/0-SET	1/0 AWG	Steel	P42	Black Oxide	Pink	1
CD-2001-1-SET	1 AWG	Steel	P37		Green	
CD-2001-2/0-SET	2/0 AWG	Steel	P45		Black	
CD-2001-2-SET	2 AWG	Steel	P33		Brown	
CD-2001-3/0-SET	3/0 AWG	Steel	P50		Orange	
CD-2001-4-SET	4 AWG	Steel	P29		Gray	
CD-2001-4/0-SET	4/0 AWG	Steel	P54		—	
CD-2001-6-SET	6 AWG	Steel	P24		Blue	
CD-2001-8-SET	8 AWG	Steel	P21		Red	
CD-2001-250-SET	250 kcmil	Steel	P62		Yellow	
CD-2001-300-SET	300 kcmil	Steel	P66		White	
CD-2001-350-SET	350 kcmil	Steel	P71		Red	
CD-2001-400-SET	400 kcmil	Steel	P76		Blue	
CD-2001-500-SET	500 kcmil	Steel	P87		Brown	



CD-2001-1/0-SET

CD-22 Crimp Dies

Part Number	Conductor Size Range	Material	Finishing/Coating	Color Code	Std Pkg. Qty.
CD22-2/0	2/0 AWG	Steel	Black Oxide	Black	1
CD22-3/0	3/0 AWG			Orange	

CD-920 Crimp Dies

Part Number	Conductor Size Range	Material	Die Index Number	Finishing/ Coating	Color Code	Std Pkg. Qty.
CD-920-1	1 AWG	Steel	P37	Black Oxide	Green	1
CD-920-1/0	1/0 AWG		P42		Pink	
CD-920-2	2 AWG		P33		Brown	
CD-920-2/0	2/0 AWG		P45		Black	
CD-920-3/0	3/0 AWG		P50		Orange	
CD-920-4	4 AWG		P29		Gray	
CD-920-4/0	4/0 AWG		P54		—	
CD-920-6	6 AWG		P24		Blue	
CD-920-8	8 AWG		P21		Red	
CD-920-250	250 kcmil		P62		Yellow	
CD-920-300	300 kcmil		P66		White	
CD-920-350	350 kcmil		P71		Red	
CD-920-400	400 kcmil		P76		Blue	
CD-920-500			P87		Brown	
CD-920-500A	500 kcmil		P99		Pink	
CD-920-600	600 kcmil		P94		Green	
CD-920-750	750 kcmil		P106		Black	



CD-920-1

Copper Code Hex Die

Part Number	Conductor Size Range	Material	Finishing/Coating	Color Code	Std Pkg. Qty.
KC22-600B	600 kcmil	Steel	Black Oxide	Green	1



KC22-600B

Copper Mechanical Anti-Rotational Lug

Part Number	Series	Height in. (mm)	Length in. (mm)	Width in. (mm)	Finishing/Coating	Std Pkg. Qty.
CLMAR2/0-14-Q	UGB Series	0.87 (22.1)	1.2 (30.6)	0.6 (15.2)	Tin-Plated	25



CLMAR2/0-14-Q

Access Floor Grounding Clamps

Part Number	Max - Min Conductor Size Range	No. of Ports Hole Size in.	Figure Dimensions			Std Pkg. Qty.
			Width in. (mm)	Height in. (mm)	Depth in. (mm)	
GPQC10-1/0	1/0 - 6		3.38 (58.9)	3.19 (81)	4.19 (106.4)	1



GPQC10-1/0

GROUNDING CONNECTORS

Telecommunications Grounding Busbars	131
NEMA Hole Pattern Grounding Busbar	131
Universal Ground Bars and Accessories	131
Grounding Busbar Kits	131
Equipment Bonding Jumper Kit	132
Armored Cable Grounding Kit	133
Retrofit Rack Grounding Kit	133
Green Bonding Cage Nut Kit	133
Auxiliary Cable Bracket	134
Code/Flex Conductor HTAP	135
Clear Covers for HTCT HTAPS	135
E-Style Grounding Connectors	135
Grounding Cross Connectors	136
C-Style Grounding and Power Connector	136
Universal Beam Grounding Clamp	136
Code Conductor, Heavy Duty, CTAP	136
Bronze Service Post Connector	136

Telecommunications Grounding Busbars

Part Number	Bar Size in.	No. of Mounting Positions		Std. Pkg. Qty.
		1/4 in. Stud Hole with Spacing	Change to 3/8 in. Stud Hole with 1 in. Hole Spacing	

Telecommunications Grounding Busbars (TGB)

GB2B0304TPI-1	1/4 x 2 x 10	4	3	1
GB2B0306TPI-1	1/4 x 2 x 12	6		
GB2B0312TPI-1	1/4 x 2 x 12	2		
GB2B0514TPI-1	1/4 x 2 x 24	14	5	

Telecommunications Main Grounding Busbars (TMGB)

GB4B0612TPI-1	1/4 x 4 x 12	12	6	1
GB4B0624TPI-1	1/4 x 4 x 20	24		
GB4B1028TPI-1	1/4 x 4 x 24	28	10	



GB2B0304TPI-1



GB4B0612TPI-1

NEMA Hole Pattern Grounding Busbar

Part Number	Bar Size in.	No. of Mounting Positions		Std. Pkg. Qty.
		1/4 in. Stud Hole with 1 3/4 in. Hole Spacing		
GB4N0016TPI-1	1/4 x 4 x 24	16		1



GB4N0016TPI-1

Universal Ground Bars

Part Number	Number of Ports	Wire Port Wire Range AWG	1/4-28 Wire Port Screw Qty Range AWG	No. of Mounting Positions				Mounting Holes to Panel Width in. (mm)
				Length in. (mm)	Width at Top in. (mm)	Width at Base in. (mm)	Height in. (mm)	
UGB2/0-414-6	6	14-4	8	4.92 (125.0)	0.62 (15.7)	0.44 (11.1)	0.48 (12.2)	2.37 (61.1)
UGB2/0-414-12	12	14-12	14	8.28 (210.3)	0.62 (15.7)	0.44 (11.1)	0.48 (12.2)	5.73 (145.4)
UGB2/0-414-18	18	14-18	20	11.64 (295.7)	0.62 (15.7)	0.44 (11.1)	0.48 (12.2)	9.09 (230.8)



UGB2/0-414-6

Universal Ground Bar Accessories

Part Number	Description	Length in. (mm)	Width in. (mm)	Height in. (mm)
UGB-B-SO	Universal ground bar bonding stand-offs; includes two stand-offs and hardware	2.34 (59.3)	0.63 (15.9)	0.75 (19.1)
UGB-IN-SO	Universal ground bar isolation stand-offs; includes two stand-offs and hardware	1.57 (40)	0.59 (15.0)	0.98 (25.0)



UGB-B-SO

Grounding Busbar Kit for Threaded Rail Fasteners

Part Number	Description	Std. Pkg. Qty.
RGRB19U	Grounding busbar; 19 in. (483mm) length; tin-plated; twenty holes arranged for flexibility in mounting with twenty #12-24 x 0.5 in. hex head screws installed; mounting hole sets have 0.625 in. (15.9mm) spacing; provided with two each #12-24 x 0.5 in., M6 x 12mm thread-forming screws, and two #12 flat washers for mounting	1



RGRB19U

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Grounding Busbar Kit

Part Number	Description	Std. Pkg. Qty.
-------------	-------------	----------------

Grounding Busbar Kit for Threaded Rail Fasteners

RGRB19Y	Grounding busbar; 19 in.(483mm) length; tin-plated copper; fourteen holes arranged for flexibility in mounting; provided with two each #12-24 x 0.5 in. and M6 x 12mm thread-forming screws	1
----------------	---	---

Grounding Busbar Kit for Cage Nut Rail Fasteners

RGRB19CN	Grounding busbar; 19 in. (483mm) length; tin-plated copper; twenty holes arranged for flexibility in mounting with twenty #12-24 x 0.5 in. hex head screws installed; mounting hole sets have 0.625 in. (15.9mm) spacing; provided with two cage nut bonding studs and four #12-24 bonding nuts	1
-----------------	---	---



RGRB19Y

Grounding Strip Kits

Part Number	Description	Length in. (mm)	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.
RGS134-1Y	Grounding strip; 45 RU. Provided with 0.16 oz. (5cc) of antioxidant, one grounding sticker and three each #12-24 x 1/2 in. and M6 x 12mm thread-forming screws	78.65 (2.0)	0.67 (17.0)	0.05 (1.27)	1
RGS13451-1	Grounding strip; 51 RU. Provided with 0.16 oz. (5cc) of antioxidant, one grounding sticker and three each #12-24 x 1/2 in. and M6 x 12mm thread-forming screws	89.15 (2.3)			



RGS134-1Y

Grounding Strip Kits for Cage Nut Rail Fasteners


Part Number	Description	Length in. (mm)	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.
RGS134B-1	Grounding strip; 45 RU. Provided with 0.16 oz. (5cc) of antioxidant, one grounding sticker, three cage nut bonding studs	78.65 (2.0)	0.67 (17.0)	0.05 (1.27)	1
RGS134B48-1	Grounding strip; 48 RU. Provided with 0.16 oz. (5cc) of antioxidant, one grounding sticker, three cage nut bonding studs, eight #12-24 bonding nuts and three strip clips	83.90 (2.1)		0.03 (0.76)	



RGS134B-1

Equipment Jumper Kits

Part Number	Description	Length in. (mm)	Angle	Std. Pkg. Qty.	Std. Ctn. Qty.
RGEJ1024PFY	#10 AWG (6mm²) jumper; bent lug on grounding strip side to straight lug on equipment; provided with 0.16 oz. (5cc) of antioxidant and two each #12-24 x 1/2 in. M6 x 12mm, #10-32 x 1/2 in. and M5 x 12mm thread-forming screws	24 (0.61)	90°	1	10
RGEJ1024URT	#10 AWG (6mm²) jumper, 24 in. (609.6mm) L, pre-terminated with two #10 (5.3mm) stud hole ring terminals to provide a bolt-on solution for grounding network equipment		Straight		



RGEJ1024PFY

Armored Cable Grounding Kit

Part Number	Description	Std. Pkg. Qty.
ACG24K	#6 AWG (16mm ²) jumper for armored cable diameter up to 0.84 in. (21.3mm); 24 in. (609.6mm) length; factory terminated on one end with LCC6 two-hole copper compression lug and the other end with grounding terminal; provided with two each #12-24 and M6 threadforming screws and a black polypropylene terminal cover	1



ACG24K

Retrofit Rack Grounding Kit

Part Number	Description	Std. Pkg. Qty.
RGRKCBNJY	Rack grounding kit to ground the rack; includes one RGRB19U busbar, one HTCT250-2-1 HTAP, and one RGREJ696Y grounding jumper	1



RGRKCBNJY

Green Bonding Cage Nut Kit

Part Number	Description	Std. Pkg. Qty.
CNBK	Green bonding cage nut, includes 50 #12-24 bonding cage nuts 0.06 in. – 0.11 in. thick panel) and 50 #12-24 x 0.5 in. bonding screws with #2 Phillips/slotted combo hex head (use 0.3125 in. or 8mm socket)	1



CNBK

Green Bonding Cage Nut Kit

Part Number	Description	Std. Pkg. Qty.
-------------	-------------	----------------

Bonding Stud Kits for Threaded Rail Fasteners

TRBSK	Bonding stud kit for threaded #12-24 rail fasteners; includes 25 bonding studs and 50 bonding nuts	1
-------	--	---

StructuredGround™ Mounting Hardware for TEBC Kits

HDW1/4-A-KT	Stainless steel mounting hardware for busbar; two 1/4-20 hex bolts, two 1/4-20 hex nuts, four 1/4 flat washers and two 1/4 Belleville compression washers. Mounting hardware for rack or cabinet; two #10-32 thread-forming screws and two MS thread-forming screws	1
-------------	---	---



HDW1/4-A-KT

Auxiliary Cable Bracket

Part Number	Description	Std. Pkg. Qty.	Std. Ctn. Qty.
GACB-2	Auxiliary cable bracket; 1.63 in. (41.4mm) W, 3.95 in. (100.3mm) H; 5.22 in. (132.6mm) D; provided with one mounting screw	1	10



GACB-2

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products




HTCT2-2-1

Code/Flex Conductor HTAP

Part Number	Wire Strand Type	Copper Conductor Size Range				Figure Dimension			Panduit Die Color and Die No.	Wire Strip Length in. (mm)	Std. Pkg. Qty.
		Run	Tap 1	Tap 2	Tap 3	Length in. (mm)	Width in. (mm)	Height in. (mm)			
HTCT2-2-1	Code	#2 – #6 AWG STR/SOL (25 – 16)	#2 – #6 AWG STR/SOL (25 – 16)	#8 – #14 AWG (6 – 2.5)	#8 – #14 AWG (6 – 2.5)	0.76 (19.3)	0.61 (15.5)	1.55 (39.4)	Brown PH2	13/16 (21)	1
	Flex	#2 – #8 AWG (25 – 10)	#2 – #8 AWG (25 – 10)	#8 – #14 AWG (6 – 2.5)	#8 – #14 AWG (6 – 2.5)						

Clear Covers for HTCT HTAPs

Part Number	Use with HTAP Part Number	Figure Dimension			Std. Pkg. Qty.
		Length in.	Width in.	Height in.	
CLRCVR2-1	HTCT2-2-1	5.1	1.66	1.4	1
CLRCVR3-1	HTCT250-2-1, HTCT250-250-1	5.35	2.16		



CLRCVR2-1



GCE1/0-1/0-L

E-Style Grounding Connectors

Part Number	Element	Copper Conductor Size Range AWG (mm²)	Ground Rod Size in. (mm)	Rebar Size in. (mm)	Figure Dimension			Panduit Die Color and Die No.	Panduit Part and Die Index No.	Std. Pkg. Qty.
					Length in.	Width in.	Height In.			
GCE1/0-1/0-L	Main	#6 SOL – 1/0 STR (16 – 50)	—	—	0.94 (23.9)	0.66 (16.8)	1.72 (43.7)	Red	CD-930G-1/0 PG10	1
	Tap									
GCE250-1/0-Q	Main	1/0 STR – 250 kcmil (70 – 120)	0.5 – 0.625 (12.7 – 15.9)	0.375 – 0.5, #3 – #4 (9.5 – 12.7), (#10 – #13)	1.00 (25.4)	1.05 (26.7)	2.18 (55.4)	Black	CD-930G-250 PG25	
	Tap	#6 SOL – 1/0 STR (16 – 50)	—	—						
GCE250-250-Q	Main	1/0 STR – 250 kcmil (70 – 120)	1/0 STR – 250 kcmil (70 – 120)	0.5 – 0.625 (12.7 – 15.9)		0.375 – 0.5, #3 – #4 (9.5 – 12.7), (#10 – #13)	1.08 (27.4)			
	Tap									
GCE500-1/0-X	Main	250 – 500 kcmil (150 – 240)	0.5 – 0.625 (12.7 – 15.9)	0.625 – 0.75, #5 – #6 (15.9 – 19.1), (#16 – #19)	1.36 (34.5)	2.64 (67.1)	Blue	CD-930G-500 PG50		
	Tap	#6 SOL – 1/0 STR (16 – 50)	—	—						
GCE500-250-X	Main	250 – 500 kcmil (150 – 240)	0.5 – 0.625 (12.7 – 15.9)	0.625 – 0.75, #5 – #6 (15.9 – 19.1), (#16 – #19)	1.32 (33.4)	2.85 (72.4)				
	Tap	1/0 STR – 250 kcmil (70 – 120)	—	—						



GCC6X6250-1/0

Grounding Cross Connectors

Part Number	Element	Copper Conductor Size Range AWG (mm²)	Ground Rod Size in. (mm)	Rebar Size in. (mm)	Figure Dimension			Panduit Die Color and Die No.	Panduit Part and Die Index No.	Std. Pkg. Qty.
					Length in.	Width in.	Height in.			
GCC6X6250-1/0	A	#2 SOL – 250 kcmil (35 – 120)	0.5 – 0.625 (12.7 – 15.9)	0.375 – 0.5, #3 – #4 (9.5 – 12.7), (#10 – #13)	1.00 (25.4)	1.06 (26.9)	2.12 (53.8)	Black	CD-930G-250 PG25	1
	B	#6 SOL – 1/0 STR (16 – 50)	—	—	1.00 (25.4)	1.06 (26.9)	1.68 (42.7)		CD-930G-250 PG25	
GCC6X6500-250	A	250 – 500 kcmil (150 – 240)	0.5 – 0.625 (12.7 – 15.9)	0.625 – 0.75, #5 – #6 (15.9 – 19.1), (#16 – #19)	1.00 (25.4)	1.32 (33.4)	2.48 (63.0)	Blue	CD-930G-500 PG50	
	B	#2 SOL – 250 kcmil (35 – 120)	—	—	1.00 (25.4)	1.16 (29.5)	2.29 (58.2)		CD-930G-500 PG50	



CTAPR250-250-L

C-Style Grounding and Power Connectors B

Part Number	Element	Copper Conductor Size Range AWG (mm²)	Ground Rod Size in. (mm)	Figure Dimension			Panduit Part and Die Index No.	Std. Pkg. Qty.
				Length in.	Width in.	Height In.		
CTAPR250-250-L	Main	3/0 STR – 250 kcmil (95 – 120)	0.5 – 0.625 (12.8 – 14.2) Copper Clad	0.88 (22.4)	0.94 (23.9)	2.07 (52.6)	PG25	50
	Tap		N/A					
CTAPR500-2/0-X	Main	300 kcmil – 500 kcmil (185 – 240)	0.75 (17.2) Copper Clad		1.23 (31.2)	2.42 (61.5)	P500	10
	Tap	6 STR – 2/0 STR 6 SOL – 3/0 SOL (16 – 50) (16 SOL – 70 SOL)	N/A					
CTAPR500-250-X	Main				1.34 (33.9)	2.69 (68.2)		
	Tap	300 kcmil – 500 kcmil (185 – 240)						
CTAPR500-500-X	Main	3/0 STR – 250 kcmil (95 – 120)		1.10 (27.9)	1.36 (34.5)	2.92 (74.2)		
	Tap							

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products



GUBC500-6

Universal Beam Grounding Clamp

Part Number	Material	Copper Conductor Size Range AWG (mm²)	Flange Thickness in. (mm)	Thread Size in. (mm)	Figure Dimensions				Hex Size	Std. Pkg. Qty.
					A in. (mm)	L in. (mm)	W in. (mm)	H in. (mm)		
GUBC500-6	Copper	#6 AWG – 500 kcmil (16 – 240)	0.250 – 0.675 (6.3 – 17.1)	0.5 – 13	1.75 (44.4)	3.15 (80.0)	2.13 (54.0)	2.50 (63.5)	0.25	1



CTAP2/0-2-X

Code Conductor, Heavy Duty, CTAP

Part Number	Copper Conductor Size		Figure Dimensions			Panduit Die Index No	Burndy Die Index No	Wire Strip Length in. (mm)	Std. Pkg Qty.
	AWG Run (mm²)	AWG Tap (mm²)	L in. (mm)	T in. (mm)	V in. (mm)				
CTAP2/0-2-X	1/0 – 2/0 AWG STR	#8 – #2 AWG SOL or STR	0.80 (20.3)	0.93 (23.6)	1.32 (8.1)	PO	O	1 1/16 (27)	10
CTAP4/0-2-X	X 3/0 – 4/0 AWG STR	#6 – #2 AWG SOL or STR	0.94 (23.9)	1.08 (27.4)	1.66 (42.2)	PD3	F	1.25 (32)	
CTAP4/0-4/0-X		X 3/0 – 4/0 AWG STR	1.00 (25.4)	1.08 (27.4)	1.57 (39.9)				
CTAP2-2-X	#2 SOL OR STR	#2 SOL OR STR	0.60 (15.3)	0.75 (19.1)	1.05 (26.7)	PC	C	7/8 (22.2)	



SP2-2-C

Bronze Service Post Connectors, Male Stud, Single Conductor

Part Number	Conductor Size Range (AWG)	Stud Size (UNC Threads)	Figure Dimensions		Nut Hex Size	Body Hex Size	Std. Pkg. Qty.
			L in. (mm)	Z in. (mm)			
SP2-2-C	#10 STR – #2 STR	0.375 – 16	1.38	0.63	0.88	0.69	100
SP2-2L-C			1.28	1.13			
SP2-2/0-Q	#2 SOL – 2/0 STR	0.5 – 13	1.88	0.75	1.13	0.88	25
SP2-4/0-Q	#1 SOL – 4/0 STR	0.625 – 11	2.25	1	1.38	1.13	

SAFETY SOLUTIONS

VeriSafe™ Absence of Voltage Testers	138
VeriSafe™ 2.0.....	138
VeriSafe™ 2.0 Network Module	138
VeriSafe™ Insulation Piercing Connectors	138
VeriSafe™ Accessories	138
Electrical Labels in Dispenser	138
Self-Laminating Safety Tag Carriers.....	138
Self-Laminating Fiber Optic Cable Marker Tags	139
Lockout Devices	139
Hazard Tapes and Labels	140

VeriSafe™ Absence of Voltage Testers

Part Number	For Use With	Description	Std. Pkg. Qty.
VS-AVT-C08-L10	3-Phase AC Systems, up to 600 V	Includes three-phase battery powered indicator module, 8 ft. (2.4m) system cable, and 10 ft. (3.0m) sensor leads	1
VS-AVT-C02-L03	3-Phase AC Systems, up to 600 V	Includes three-phase battery powered indicator module, 2 ft. (0.6m) system cable, and 3 ft. (0.9m) sensor leads	



VS2-AVT-1PB-02

VeriSafe™ 2.0

Part Number	For Use With	Description	Std. Pkg. Qty.
VS2-AVT-1PB-02	1-Phase AC or DC Systems, up to 1kV	VeriSafe 2.0 AVT 1P, 2' (0.6m) system cable, Battery Indicator	1
VS2-AVT-1PB-08		VeriSafe 2.0 AVT 1P, 8' (2.4m) system cable, Battery Indicator	
VS2-AVT-1PB-16		VeriSafe 2.0 AVT 1P, 16' (4.8m) system cable, Battery Indicator	
VS2-AVT-1PF-02		VeriSafe 2.0 AVT 1P, 2' (0.6m) system cable, Batt-Free Indicator	
VS2-AVT-1PF-08		VeriSafe 2.0 AVT 1P, 8' (2.4m) system cable, Batt-Free Indicator	
VS2-AVT-1PF-16		VeriSafe 2.0 AVT 1P, 16' (4.8m) system cable, Batt-Free Indicator	
VS2-AVT-3PB-02	3-Phase AC Systems, up to 1kV	VeriSafe 2.0 AVT 3P, 2' (0.6m) system cable, Battery Indicator	
VS2-AVT-3PB-08		VeriSafe 2.0 AVT 3P, 4' (2.4m) system cable, Battery Indicator	
VS2-AVT-3PB-16		VeriSafe 2.0 AVT 3P, 16' (4.8m) system cable, Battery Indicator	
VS2-AVT-3PF-02		VeriSafe 2.0 AVT 3P, 2' (0.6m) system cable, Batt-Free Indicator	
VS2-AVT-3PF-08		VeriSafe 2.0 AVT 3P, 4' (2.4m) system cable, Batt-Free Indicator	
VS2-AVT-3PF-16		VeriSafe 2.0 AVT 3P, 16' (4.8m) system cable, Batt-Free Indicator	

VeriSafe™ 2.0 Network Module

Part Number	Description
VS2-NET	Network Module accessory, for use with VS2-AVT models



VS2-NET

VeriSafe™ 2.0 Accessories

Part Number	For Use With	Std. Pkg. Qty.
VS2-AVT-1IB	VeriSafe 2.0 AVT single-phase Battery Indicator Module	1
VS2-AVT-1IF	VeriSafe 2.0 AVT single-phase Battery Free Indicator Module	
VS2-AVT-3IB	VeriSafe 2.0 AVT three-phase Battery Indicator Module	
VS2-AVT-3IF	VeriSafe 2.0 AVT three-phase Battery Free Indicator Module	



VS2-AVT-1IB

VeriSafe™ Insulation Piercing Connectors

Part Number	Description
VS-CKP14-6	Insulation Piercing Connection Kit for tapping 14 to 6 AWG conductors. Rated for 600 V installations. Kit includes 3 connectors for installation of 1 AVT
VS-CKP4-000	Insulation Piercing Connection Kit for tapping 4 to 3/0 AWG conductors. Rated for 600 V installations. Kit includes 3 connectors for installation of 1 AVT
VS-CKP1K4/0-500	Insulation Piercing Connection Kit for tapping AWG 4/0 to 500MCM copper conductors. Rated for 1KV installations. Kit includes 3 connectors for installation of 1 AVT



VS-CKP14-6

Electrical Label in Dispenser

Part Number	Description	Diameter in.	Std. Pkg. Qty.
PLD-57	300 labels/dispenser	0.75	1



PLD-57

Self-Laminating Safety Tag Carriers

Part Number	Lamination Style	Tag Size in.	Std. Pkg. Qty.
PST-1	Front Only	3 x 2	10




PST-1

Lockout Devices

Self-Laminating Fiber Optic Cable Marker Tags

Part Number	Legend	Color (Legend/ Background)	Width in. (mm)	Height in. (mm)	Tags Per Pkg.	Std. Pkg. Qty.	Std. Ctn. Qty.
PST-FO	CAUTION: FIBER OPTIC CABLE TYPE _____ COUNT _____	Black/Yellow	3.50 (89.0)	2 (51)	5	1	40
PST-FOBLNK	BLANK	Yellow					



PST-FO

PowerLOK™ Circuit Breaker Lockout Device

Part Number	Description	Std. Pkg. Qty.
PSL-PCBNT	PowerLOK™ "No Tool circuit" breaker lockout	1



PSL-PCBNT

Miniature Circuit Breaker Lockout Devices

Part Number	Description	Std. Pkg. Qty.
PSL-MCBNT	"No Tool" miniature circuit breaker lockout	1
PSL-MCBNT-V		5

Universal & I-LINE™ Circuit Breaker Lockout Devices

Part Number	Desription	Std. Pkg Qty.
PSL-CB	Universal circuit breaker lockout	1
PSL-CBNT	“No Tool” Universal circuit breaker lockout	
PSL-CBNT-V		5
PSL-CBILNT	“No Tool” circuit breaker lockout for use with Square D I-LINE™/ Federal Pacific (FPE) circuit breakers	1



PSL-CB



PSL-CBILNT

Lockout Hasps

Part Number	Description	Max No. Locks	Std. Pkg. Qty.	Std. Ctn. Qty.
PSL-MLD	Multiple lockout device; includes lockout hasp and 6.0' (1.8m) vinyl coated galvanized steel cable with loop hole	6	1	20
PSL-MLDH-X	Multiple lockout device (hasp only)		10	—
PSL-1	Hasp with 1.00" (25.40mm) diameter jaw and overlapping tabs		12	144
PSL-1A	Hasp with 1.00" (25.40mm) diameter jaw			



PSL-MLD



PSL-1

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Toggle Switch Cover Device

Part Number	Std. Pkg. Qty.
PSL-WS	1



PSL-WS

Corded AC Plug Cover Lockout Device

Part Number	Description	Std. Pkg. Qty.	Std. Ctn. Qty.
PSL-CL480	Lockout fits 240 – 480 VAC corded plug, 3.25" x 3.25" x 6.50" inside dimensions	12	144



PSL-CL480

Hazard Safety Tapes

Identification Tape, Vinyl


Part Number	Legend	Color (Legend/ Background)	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
PVT-15	FRONT AND BACK: DO NOT OPERATE (and blank write-on area)	Black/White	3 (76.2)	5.75 (146.05)	1	20
PVT-41	DO NOT OPERATE					



PVT-15

Voltage Marker, Vinyl


Part Number	Legend	Color (Legend/ Background)	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
PCV-480BY	480 Volts	Black/Orange	1.125 (28.6)	4.5 (114.3)	5	50



PCV-480BY

Pre-Printed Conductor Earth (Ground) Symbol Label, Polyester

Part Number	Legend	Color (Legend/ Background)	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
PESS-A-ES	EARTH (GROUND)	Black/White	6.75 (171.4)	1.5 (38.1)	10	100



PESS-A-ES

Pre-Printed ISO Warning Symbol Card, Vinyl

Part Number	Legend	Color (Legend/ Background)	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
PESW-B-1Y	CAUTION - RISK OF ELECTRIC SHOCK	Black/Yellow	0.9 (22.86)	0.78 (19.9)	10	200
PPS0204W2100A	WARNING Potential Arc Flash Hazard can shock, burn or cause death	Polyester	Orange/ Black	4 (101.6)	2.25 (57.15)	5
PPS0305W2100	WARNING Potential Arc Flash Hazard can shock, burn or cause death			5 (127)	3 (76.2)	



PESW-B-1Y



PPS0204W2100A



Solar Labels

Part Number	Legend	Material	Color (Legend/ Background)	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.
PPS0106CLSC-L	CAUTION: SOLAR CIRCUIT	Polyester Adhesive	Black/Yellow	6 (152.4)	1 (25.4)	50
PPS0204BLASM-L	Nominal Operating AC Volatge		White/Red	4 (101.6)	2 (50.8)	
PPS0106BRDND-L	Do Not Disconnect Under Load	Reflective Polyester Adhesive		6 (152.4)	1 (25.4)	
PPS0204WL3-L	This Service Meter Is Also Served By A Photovoltaic System	Polyester Adhesive	White/Orange	4 (101.6)	2 (50.8)	
PPS0204WLDNR-L	Power Source Output Connection. Do Not Relocate this Overcurrent Device		Black/Yellow			
PPS0104BRAD2-L	Photovoltaic AC Disconnect, Maximum AC Operating Current, Nominal Operating AC Voltage	Reflective Polyester Adhesive	White/Red	4 (101.6)	1 (25.4)	
PPS0204WL2-L	Turn Off Photovoltaic AC Disconnect Prior to Working Inside Panel	Polyester Adhesive	White/Orange		2 (50.8)	
PPS0204WL7-L	WARNING - Electrical Shock Hazard Do Not Touch Terminals					
PPS0106BRRS-L	Rapid Shutdown for Solar PV System	Reflective Polyester Adhesive	White/Red	6 (152.4)	1 (25.4)	
PPS0104BRSD-L	PV System Disconnect			Polyester Adhesive	White/Orange	
PPS0204WL6-L	WARNING - Electrical Shock Hazard If A Ground Fault Is Indicated	1 (25.4)				
PPS0104WLDPS-L	WARNING - Dual Power Source Second Source is Photovoltaic System	2 (50.8)				
PPS0204WL5-L	WARNING - Electrical Shock Hazard					
PPS0106BRMSD-L	Main Photovoltaic System Disconnect	Reflective Polyester Adhesive	White/Red	6 (152.4)	1 (25.4)	
PPS0104WL1-L	WARNING - PV Source Circuit	Polyester Adhesive	Black/White/Orange	4 (101.6)		
PPS0106BRRSS-L	Rapid Shutdown Switch for Solar PV System	Reflective Polyester Adhesive	White/Red	6 (152.4)		
PPS0106CRDNI-L	Do Not Install Additional Loads in this Panel			4 (101.6)		
PPS0104BRERS-L	Photovoltaic System Equipped with Rapid Shutdown	Polyester Adhesive	White/Orange	6 (152.4)	2 (50.8)	
PPS0204WL4-L	WARNING - Dual Power Supply	Reflective Polyester Adhesive	White/Red	6 (152.4)	1 (25.4)	
PPS0106BRSDC-L	Solar PV DC Circuit	Polyester Adhesive		4 (101.6)	2 (50.8)	
PPS0104BRDD-L	Photovoltaic DC Disconnect	Reflective Polyester Adhesive		6 (152.4)	1 (25.4)	
PPS0204BLMRC-L	Max Rated Output Current	Polyester Adhesive		4 (101.6)	2 (50.8)	
PPS0106BRDSC-L	DC Photovoltaic Source Circuit	Reflective Polyester Adhesive	White/Red	6 (152.4)	1 (25.4)	
PPS0104BRMSAD-L	Main Photovoltaic System AC Disconnect	Polyester Adhesive		4 (101.6)	2 (50.8)	
PPS0204BLDD-L	Photovoltaic System DC Disconnect	Reflective Polyester Adhesive		6 (152.4)	1 (25.4)	
PPS0106BRDOC-L	DC Photovoltaic Output Circuit	Polyester Adhesive		4 (101.6)	2 (50.8)	
PPS0406BLERS-L	Solar PV System Equipped with Rapid Shutdown	Polyester Adhesive	Black/White/Yellow	4 (101.6)	2 (50.8)	
PPS0204BLPS-L	Direct Current Photovoltaic Power Source					
PPS0204BLRAC-L	Rated AC Operating Current	Reflective Polyester Adhesive	White/Red	6 (152.4)	1 (25.4)	
PPS0104BRAD-L	Photovoltaic AC Disconnect					
PPS0106WRPS-L	Photovoltaic Power Source	Polyester Adhesive	White/Red	4 (101.6)	2 (50.8)	
PPS0204BLPS2-L	Rated Max Power-Point Current	Polyester Adhesive	White/Red	4 (101.6)	2 (50.8)	

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products



Electric Line Tape, Aluminum

Part Number	Legend	Color (Legend/Background)	Width in. (mm)	Length ft. (m)	Std. Ctn. Qty.	Std. Pkg. Qty.
HTDU6R-E	CAUTION ELECTRIC LINE BURIED BELOW	Black/Red	6.27 (159.25)	1 (304.8)	1	0



T200X000VP1Y

Printable Labeling Tape, Vinyl

Part Number	Part Number	Color	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.
T200X000VP1Y	Thermal Transfer	White	2	RL1	1
T200X000VX1Y		Yellow			
T400X000VP1Y		White	4		
T400X000VW1Y		Red			
T400X000VX1Y		Yellow			

TERMINALS

Ring Terminal, Insulated	144
Ring Terminal, Large Wire, Vinyl Insulated	145
Ring Terminal, Non-Insulated	145
Fork Terminal, Insulated	146
Ring Terminal, Nylon Insulated, Non-Funnel Entry	146
Ring Terminal, Nylon Insulated, Funnel Entry	147
Ring Terminal, Insulated, Funnel Entry	147
Locking Fork Terminal, Vinyl Insulated, Funnel Entry	147
Female Disconnect, Nylon Fully Insulated, Funnel Entry	147
Female Disconnect, Nylon Fully Insulated, Expanded Wire Entry	148
Female Disconnect, Nylon Fully Insulated, Right Angle	148
Female Disconnect, Vinyl Barrel Insulated, Funnel Entry	148
Male Disconnect, Nylon Fully Insulated, Funnel Entry	148
D-Ring Terminals, Funnel Entry	148
Male/Female Couplers, Nylon Insulated, Funnel Entry	149
Insulated Ferrules on Reels, Single Wire and Mini Reels	150
Pin Terminals, Vinyl Insulated, Funnel Entry	150
Parallel Splice, Non-Insulated	150
Wire Joints, Nylon Insulated	150
Butt Splices, Insulated	151
Butt Splice, Nylon Insulated	151
Heat Shrink, Butt Splices	151
Non-Insulated, Butt Splices	151
Insulated Ferrules, Single/Twin Wire DIN End Sleeve	152
Ferrules, Non-Insulated	152
Ferrules, Non-Insulated	152

Ring Terminals, Insulated

Part Number	Wire Range AWG	Stock Thick. in.	Max Wire Insul Dia. in.	Stud Size	Figure Dimensions			Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
					L in.	W in.	C in.				
Ring Terminals, Nylon Insulated											
PN18-6R-C	22 – 18	0.03	0.145	#6	0.8	0.25	0.22	CT-100, CT-1550, CT-1551, CT-2300/ST, CT-2500/L. UP-14ZLW	100	500	Red
PN18-8R-C				#8	0.86	0.31	0.25				
PN18-10R-C				#10	0.88						
PN14-6R-C	18 – 14	0.162	#6	0.85	0.31	0.25			1000	0	Blue
PN14-6R-M			#6				100		500		
PN14-8R-C			#8				1000		0		
PN14-8R-M			#8				100		500		
PN14-10R-C			#10	1000	0						
PN14-10R-M			1/4 in.	1.05	0.46	0.38	100		500		
PN14-14R-C			#8	1.06	0.37	0.31	50				
PN10-8R-L	#10	0.38	500		0						
PN10-10R-L	12 – 10	0.04	0.225	1/4 in.	1.21	0.52	0.38		500	500	Yellow
PN10-10R-D									500	0	
PN10-14R-L				3/8	1.29	0.58	0.43		50	500	
PN10-14R-D									50	500	
PN10-38R-L									50	500	



PN18-6R-C

Ring Terminals, Vinyl Insulated, Funnel Entry

PV18-6R-CY	22 – 18	0.03	0.15	#6	0.86	0.25	0.22	CT-100, CT-1550, CT-1551, CT-2300/ST, CT-2500/L. UP-14ZLW	100	500	Red
PV18-6R-MY									1000	0	
PV18-8R-CY				#8	0.91		0.26		100	500	
PV18-10R-CY				#10	0.94	0.27	100		500		
PV18-10R-MY							1000		0		
PV14-6R-C	16 – 14	0.03	0.17	#6	0.92	0.31	0.25		100	500	Blue
PV14-6R-M									1000	0	
PV14-8R-C				#8					100	500	
PV14-8R-M									1000	0	
PV14-10R-C				#10					100	500	
PV14-10R-M	12 – 10	0.04	0.225		1.12	0.46	0.38		1000	0	Yellow
PV14-14R-C									100	500	
PV14-14R-M				1/4 in.					1000	0	
PV10-14R-D									500	500	
PV10-8R-L				#8					1.05	0.31	
PV10-8R-D	#10	500	0								
PV10-10R-L		50	500								
PV10-10R-D		500	0								
PV10-14R-L	1/4 in.	1.23	0.52	0.38	50	500					
PV10-56R-L	5/6										
PV10-38R-L	3/8						1.31		0.58	0.41	
PV8-10R-TY	8	0.28	0.28	#10	1.53	0.47	0.31		200	0	Red
PV8-10RX-TY				1/4 in.							
PV8-14R-TY											



PV18-6R-CY

Continued on next page

Ring Terminal, Large Wire, Vinyl Insulated

Part Number	Wire Range AWG	Stock Thick. in.	Max Wire Insul Dia. in.	Stud Size	Figure Dimensions			Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
					L in.	W in.	C in.				

Ring Terminals, Large Wire, Vinyl Insulated

PV8-10R-QY	8	0.04	0.28	#10	1.53	0.47	0.43	CT-2600/LBT, CD-2600-PV8	25	250	Red
PV8-14R-QY				1/4 in.							

Ring Terminal, Large Wire, Vinyl Expanded Insulation

PV6-14RX-X	6	0.05	0.146	1/4 in.	1.61	0.47	0.51	CT-2600/LBT, CD-2600-PV8	20	200	Blue
------------	---	------	-------	---------	------	------	------	--------------------------	----	-----	------



PV8-10R-QY

Ring Terminals, Non-Insulated

Part Number	Wire Range AWG	Stock Thickness in.	Max Wire Insul Dia. in.	Stud Size	Figure			Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
					L in.	W in.	C in.			

Ring Terminal, Non-Insulated

P18-10R-M	22 – 18	0.07	0.07	#10	0.71	0.31	0.31	CT-100, CT-200, CT-1550, CT-1551, CT-2300/ST, CT-2500/L. UP-14ZLW	1000	0
P14-10R-C	18 – 14	0.03	0.09				0.25		100	1000
P14-10R-M									1000	0
P14-14R-C				#14	0.91	0.46			0.38	100
P10-10R-L	14 – 10	0.04	0.13	#10	0.81	0.38	0.31		50	500
P10-10R-D							500		0	
P10-14R-L							#14		0.96	0.52
P10-14R-D				500	0					
P8-14R-Q				8	0.19	1.14				
P8-14R-T	200	0								
P6-14R-E	6	0.045	0.23	1.21	0.23		CT-1701, CT-2600 (CD-2600-P6)	20	200	
P6-14R-T										
P4-38R-T	4	0.05	0.29	3/8	1.46	0.68	0.29	CT-1701, CT-2600 (CD-2600-P4)	200	0
P2-38R-T	2	0.06	0.37							



P18-10R-M

Ring Terminal, Non-Insulated, High Temperature

P18-10RHT6-M	18 - 22	0.7	0.07	#10	0.71	0.31	0.31	CT-100, CT-200, CT-1550, CT-1551, CT-2300/ST, CT-2500/L. UP-14ZLW	1000	0
P10-10RHT6-L	14 - 10	0.04	0.13		0.81	0.38			50	500

Fork Terminals, Insulated

Part Number	Wire Range AWG	Stock Thickness in.	Max Wire Insul Dia. in.	Stud Size	Figure Dimensions			Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
					L in.	W in.	C in.				

Fork Terminals, Nylon Insulated

PN18-8F-C	22 – 18	0.03	0.145	#8	0.85	0.32	0.23	CT-100, CT-1550, CT-1551, CT-2300/ST, CT-2500/L, UP-14ZLW	100	500	Red
PN14-6F-C	18 – 14		0.162	#6	0.79	0.28	0.19				Blue
PN14-8F-C				#8	0.85	0.31	0.23				
PN14-10F-C				#10	0.87	0.34	0.24				
PN10-8F-L	12 – 10	0.04	0.225	#8	1.03	0.37	0.22		50	Yellow	
PN10-10F-L				#10	1.04						



PN18-8F-C

Fork Terminals, Vinyl Insulated

PV18-6F-CY	22 – 16	0.03	0.15	#6	0.86	0.3	0.21	CT-100, CT-1550, CT-1551, CT-2300/ST, CT-2500/L, UP-14ZLW	100	500	Red
PV18-8F-CY				#8	0.93	0.32	0.25				
PV18-10F-CY				#10		0.35					
PV14-6F-C	16 – 14	0.17	0.17	#6	0.84	0.28	0.19		1000	0	Blue
PV14-8F-C				#8	0.9	0.31	0.23				
PV14-8F-M				#8							
PV14-10F-C	14 – 10	0.04	0.225	#10	0.92	0.34	0.24	100	500	Yellow	
PV10-6F-L				#6	1.01	0.31	0.25				
PV10-8F-L				#8	1.04	0.37					
PV10-10F-L	#10										



PV18-6F-CY

Locking Fork Terminals, Vinyl Insulated, Funnel Entry

PV14-6LF-C	18 – 14	0.03	0.17	#6	0.9	0.25	0.22	CT-100, CT-1550, CT-1551, CT-2300/ST, CT-2500/L, UP-14ZLW	100	500	Blue
PV14-8LF-C				#8	0.97	0.29	0.25				
PV14-8LF-M											
PV10-8LF-L	12 – 10	0.04	0.225	#10	1.05	0.3	0.23		1000	0	
PV10-10LF-L					1.04	0.34					
									50	500	Yellow



PV14-6LF-C

Lock Fork Terminals, Nylon Insulated

PN14-8LF-M	18 – 14	0.03	0.162	#8	0.92	0.29	0.23	CT-100, CT-1550, CT-1551, CT-2300/ST, CT-2500/L, UP-14ZLW	1000	0	Blue
------------	---------	------	-------	----	------	------	------	---	------	---	------



PN14-8LF-M

Ring Terminals, Nylon Insulated, Non-Funnel Entry

Part Number	Wire Range AWG	Stock Thickness in.	Max Wire Insul Dia. in.	Stud Size	Figure Dimensions			CA9 Series Crimp Die	CA-800/ EZ Series Crimp Die	Pieces Per Reel	Color Code
					L in.	W in.	C in.				
PN18-10R-3K	22 – 18	0.03	0.145	#10	0.86	0.31	0.25	CD9-1A	CD-800-1	3000	Red
PN14-10R-3K	16 – 14		0.162					CD9-2A	CD-800-2		Blue



PN18-10R-3K

Ring Terminals, Insulated, Funnel Entry

Part Number	Wire Range AWG	Stock Thickness in.	Max Wire Insul Dia. in.	Stud Size	Figure Dimensions			CA9 Series Crimp Die	CA-800/EZ Series Crimp Die	Pieces Per Reel	Color Code
					L in.	W in.	C in.				

Ring Terminals, Nylon Insulated, Funnel Entry

PNF18-10R-3K	22 – 18	0.03	0.145	#10	0.86	0.31	0.25	CD9-1A	CD-800-1	3000	Red
PNF14-8LF-3K	16 – 14		0.162	#8	0.85		0.29	CD9-2A	CD-800-2		Blue
PNF14-10R-3K				#10	1.06						
PNF10-10R-2K	12 – 10	0.04	0.225	1/4 in.	1.21	0.52	0.38	CD9-3B	CD-800-3	2000	Yellow
PNF10-14R-2K											



PNF18-10R-3K

Ring Terminals, Vinyl Insulated, Funnel Entry

PV18-6RB-3K	22 – 18	0.03	0.15	#6	78	0.25	0.2	CD9-1A	CD-800-1	3000	Red			
PV18-8RB-3K				#8	0.86	0.31	0.25							
PV18-10RB-3K				#10										
PV18-14RB-3K				1/4 in.								1.06	0.45	0.38
PV18-38RB-2K				3/8 in.	1.15	0.53	0.43	CD9-1B		2000				
PV14-8RB-3K	16 – 14	0.17	#8	0.86	0.31	0.25	CD9-2A	CD-800-2	3000	Blue				
PV14-10RB-3K			#10											
PV14-14RB-3K			1/4 in.				1.05				0.45	0.38	CD9-2B	
PV14-56RB-2K			5/6 in.	1.06										
PV10-10RB-2K	12 – 10	0.04	0.225	#10	1.02	0.31	0.31	CD9-3B	CD-800-3	2000	Yellow			
PV10-14RB-2K				1/4 in.										
PV10-8RB-2K				#8								1.2	0.52	0.38
PV10-38RB-2K				3/8 in.										
PV10-56RB-2K				5/6 in.	1.23	0.58	0.43							



PV18-6RB-3K

Locking Fork Terminals, Vinyl Insulated, Funnel Entry

Part Number	Wire Range AWG	Stock Thickness in.	Max Wire Insul Dia. in.	Stud Size	Figure Dimensions			CA9 Series Crimp Die	CA-800/ EZ Series Crimp Die	Pieces Per Reel	Color Code
					L in.	W in.	C in.				
PV18-6LFB-3K	22 – 18	0.03	0.15	#6	0.8	0.27	0.19	CD9-1A	CD-800-1	3000	Red
PV18-8LFB-3K				#8	0.87	0.29	0.23	D9-1A			
PV10-8LFB-2K	12 – 10	0.04	0.225		1.04	0.3	0.21	CD9-3B	CD-800-3	2000	Yellow



PV18-6LFB-3K

Female Disconnects, Nylon Fully Insulated, Funnel Entry

Part Number	Wire Range AWG	Max Wire Insul Dia. in.	Figure Dimensions			Tab Size in. (mm)	CA9 Series Crimp Die	CA-800/EZ Series Crimp Die	Pieces Per Reel	Color Code
			L in.	W in.	C in.					
DNF10-250FIB-2K	12 – 10	0.22	0.96	0.35	0.23	0.250 x 0.032 (6.3 x 0.8)	CD9-13B	CD-800-13	2000	Yellow
DNF14-250FIB-3K	16 – 14	0.16	0.84		0.22		CD9-5A	CD-800-5	3000	Blue
DNF14-250FIM-2K										
DNF14-250FIMB-K										
DPF14-250FIB-3K										
DNF18-111FIB-3K	22 – 18	0.12	0.71	0.19	0.15	0.110 x 0.02 (2.8 x 0.5)	CD9-7A	CD-800-7	3000	Red
DNF18-188FIB-3K		0.136	0.78	0.29	0.16	0.187 x 0.02 (4.8 x 0.5)	CD9-4A	CD-800-4		
DNF18-206FIB-3K				0.31	0.22	0.187/0.205 x 0.020 (4.8/5.2 x 0.5)				
DNF18-250FIB-3K				0.84		0.35				



DNF10-250FIB-2K

Female Disconnects, Nylon Fully Insulated, Expanded Wire Entry

Part Number	Wire Range AWG	Max Wire Insul Dia. in.	Figure Dimensions			Tab Size in. (mm)	CA9 Series Crimp Die	CA-800/EZ Series Crimp Die	Pieces Per Reel	Color Code
			L in.	W in.	C in.					
DNF18206FIBX-2K	22 – 18	0.21	0.87	0.31	0.22	0.187/0.205 x 0.032 (4.8/5.2 x 0.8)	CD9-6B	CD-800-6	2000	TAA
DNF18250FIBX-2K			0.93	0.35						Blue
DNF14250FIBX-2K	16 – 14	0.24				0.250 x 0.032 (6.3 x 0.8)	CD9-8B	D-800-8		



DNF18206FIBX-2K

Female Disconnects, Nylon Fully Insulated, Right Angle

Part Number	Wire Range AWG	Max Wire Insul Dia. in.	Figure Dimensions				Tab Size in. (mm)	CA9 Series Crimp Die	CA-800/EZ Series Crimp Die	Pieces Per Reel	Color Code
			L in.	W in.	H in.	D in.					
DNFR18205FIB-KD	22 – 18	0.178	0.57	0.37	0.21	0.6	0.187/0.205 x 0.032 (4.8/5.2 x 0.8)	CD9-9C	CD-800-9	1500	Red
DNFR18206FIB-KD											
DNFR18250FIB-KD											
DNFR14250FIB-KD	16 – 14						0.250 x 0.032 (6.3 x 0.8)				Blue



DNFR18205FIB-KD

Female Disconnects, Vinyl Barrel Insulated, Funnel Entry

			Figure Dimensions							
Part Number	Wire Range AWG	Max Wire Insul Dia. in.	L in.	W in.	H in.	Tab Size in. (mm)	CA9 Series Crimp Die	CA-800/EZ Series Crimp Die	Pieces Per Reel	Color Code
DV10-250-2K	12 – 10	0.23	0.95	0.29	0.12	0.250 x 0.032 (6.3 x 0.8)	CD9-3A	CD-800-3	2000	Yellow
DV14-250B-3K	16 – 14	0.17	0.83				CD9-2A	CD-800-2	3000	Blue
DV18-250B-3K	22 – 18	0.15					CD9-1A	CD-800-1		Red



DV10-250-2K

Male Disconnects, Nylon Fully Insulated, Funnel Entry

Part Number	Wire Range AWG	Max Wire Insul Dia. in.	Figure Dimensions			Tab Size in. (mm)	CA9 Series Crimp Die	CA-800/EZ Series Crimp Die	Pieces Per Reel	Color Code
			L in.	W in.	H in.					
DNF18-250FIM-2K	22 – 18	0.133	0.9	0.42	0.3	0.250 x 0.032 (6.3 x 0.8)	CD9-4B	CD-800-4	2000	Red
DNF18-250FIMB-K		0.135	0.91	0.45	0.34				1000	



DNF18-250FIM-2K

D-Ring Terminals, Funnel Entry

Part Number	Wire Range AWG	Figure Dimensions		Recommended Installation Tool	Std. Pkg. Qty.	Color
		L in. (mm)	W in. (mm)			
PNF10-10R-D	12 – 10	1.06 (26.9)	0.37 (0.04)	CT-100, CT-1550, CT-1551, CT-2300/ST (CD-550), CT-2500/L (CT-2550CH), UP14ZLW (CD-550)	500	Yellow



PNF10-10R-D

Male/Female Couplers, Nylon Insulated, Funnel Entry

Part Number	Wire Range (AWG)	Max Wire Insul Dia. in.	Figure Dimensions			Tab Size in.	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
			L in.	W in.	H in.					

Male Disconnects, Nylon Fully Insulated, Funnel Entry

DNF18-250FIM-L	22 – 18	0.133	0.9	0.42	0.27	0.250 x 0.032	CT-100, CT-1525, CT-2300/ST, CT-2500/L, UP-14ZLW	50	250	Red
DNF18-250FIM-M Male								1000	0	
DNF18-250FIB-C Female		0.136						100	1000	
DNF18-250FIB-M Female								1000	0	
DNF14-250FIM-L Male	16 – 14	0.158	0.84	0.35	0.22	0.250 x 0.032	CT-1525, CT-2300/ST, CT-2500/L, UP-14ZLW	50	250	Blue
DNF14-250FIM-M Male								1000	0	
DNF14-250FIB-C Female		0.16					CT-100, CT-1525, CT-2300/ST, CT-2500/L, UP-14ZLW	100	1000	
DNF14-250FIB-M Female								1000	0	
DNF10-250FIB-L Female	12 - 10	0.22	0.96	0.23			CT-1525, CT-2300/ST (CD-525), CT-2500/L (CT-2525CH), UP14ZLW (CD-525)	50	250	Yellow
DNF10-250FIB-D Female								500	0	

Female Disconnects, Nylon Fully Insulated, Funnel Entry

DNF18-110FIB-C	22 – 18	0.12	0.71	0.19		0.110 x 0.032	CT-100, CT-1525, CT-2300/ST, CT-2500/L, UP-14ZLW	100	1000	Red
DNF18-188FIB-M		0.14	0.78	0.29	0.16	0.187 x 0.020"	CT-1525, CT-2300/ST (CD-525), CT-2500/L (CT-2525CH), UP14ZLW (CD-525)	1000	0	

Female Disconnect, Nylon Fully Insulated, Funnel Entry, Metal Collar

DNF10-250FI-L	12 – 10	0.22	0.95	0.36	0.27	0.25 x 0.032	CT-100, CT-1525, CT-2300/ST, CT-2500/L, UP-14ZLW	50	500	Yellow
DNF10-250FI-D								500	0	

Female Disconnects, Nylon Barrel Insulated, Funnel Entry

DNF18-111-M	22 – 18	0.1	0.69	0.15	0.07	0.110 x 0.020	CT-1525, CT-2300/ST (CD-525), CT-2500/L (CT-2525CH), UP14ZLW (CD-525)	1000	0	Red
DNF14-250-C	16 – 14	0.162	0.83	0.29	0.12	0.250 x 0.032	CT-1550, CT-1551, CT-2300/ST, CT-2500/L, UP-14ZLW	100	500	Blue
DNF14-250-M								1000	0	

Female Disconnects, Vinyl Barrel Insulated

DV14-250B-C	16 – 14	0.17	0.81	0.29	0.12	0.250 x 0.032	CT-1525, CT-2300/ST (CD-525), CT-2500/L	100	500	Blue
DV10-250-L	12 – 10	0.119	1.03	0.3	0.13		CT-1550, CT-1551, CT-2300/ST (CD-525), CT-2500/L (CT-2525CH), UP14ZLW (CD-525)	50	500	Yellow

Right Angle Female Disconnect, Nylon Insulated, Funnel Entry

DNFR18-250B-M	22 – 18	0.13	0.62	0.62	0.2	0.250 x 0.032	CT-300-1	1000	0	Red
DNFR14-250B-L	16 – 14	0.155	0.78	0.36			CT-1525, CT-2300/ST, CT-2500/L	50	100	Blue
DNFR14-250B-M								1000	0	

Right Angle Female Disconnect, Nylon Fully Insulated, Funnel Entry

DNFR18-250FIB-M	22 – 18	0.18	0.6	0.6	0.21	0.250 x 0.032	CT-300-1	1000	0	Red
DNFR14-250FIB-M	16 – 14						CT-300-1		0	Blue



DNF18-250FIM-L



DNF18-110FIB-C



DNF10-250FI-L



DNF18-111-M



DV14-250B-C



DNFR18-250B-M



DNFR18-250FIB-M

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Insulated Ferrules on Reels, Single Wire and Mini Reels

Part Number	Wire Range AWG (mm ²)	CP-881 Inserts	Max Wire Insul Dia. in. (mm)	Stud Size	Figure Dimensions			Wire Strip Length in. (mm)	Color Code
					L in. (mm)	P in. (mm)	ID in. (mm)		
FSD77-8-3K2	– (1)	Red	0.11 (2.8)	Ferrules	0.57 (14.5)	0.31 (8)	0.06 (1.5)	13/32 (10.0)	Red
FSD78-8-2KD0	16 (1.5)		0.13 (3.2)				0.07 (1.8)		Black
FSD77-8-K	– (1)		0.11 (2.8)				0.06 (1.5)		Red



FSD77-8-3K2

Pin Terminals, Vinyl Insulated, Funnel Entry

Part Number	Wire Range AWG	Max Wire Insul Dia. in.	Figure Dimension			Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
			L in.	W in.	P in.				
PV18-P47-CY	22 – 18	0.15	0.97	0.07	0.49	CT-100, CT-260, CT-1550, CT-1551, CT-2300/ST, CT-2500/L	100	1000	Red
PV14-P47-C	16 – 14	0.17							Blue



PV18-P47-CY

Parallel Splice, Non-Insulated

Part Number	Wire Range (AWG)	Figure Dimension Length in.	Wire Strip Length in.	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.
PS12-L	14 – 12	0.38	7/16	CT-100, CT-200	50	500



PS12-L

Wire Joints, Nylon Insulated

Part Number	Wire Range (AWG)	Figure Dimension Length in.	Wire Strip Length in.	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
JN218-216-C	(2) #22 – (2) #16	0.78	7/16	CT-1550, CT-1551, CT-2300/ST, CT-2500/L	100	1000	Clear
JN224-318-M	(2) #24 – (2) #14	0.79		CT-1550, CT-1551, CT-2500/L (CT-2550CH)			
JN218-216-M	(2) #22 – (2) #14	0.78		CT-100, CT-1550, CT-1551, CT-2500/L (CT-2550CH)			
JN314-412-C	(3) #14 – (4) #12	0.97	5/8	CT-100, CT-1550, CT-1551, CT-2300/ST, CT-2500/L			
JN418-212-C	(4) #18 – (2) #12	0.93	1/2	CT-100, CT-260			
JN418-212-D	(4) #18 – (2) #10			CT-100, CT-1550, CT-1551, CT-2500/L (CT-2550CH)			



JN218-216-C

Butt Splices, Insulated

Part Number	Wire Range (AWG)	Max Ins. in.	Figure Dimension Length in.	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
-------------	------------------	--------------	-----------------------------	-------------------------------	----------------	----------------	-------

Butt Splices, Nylon Insulated

BSN22-C	26 – 22	0.08	0.79	CT-1525, CT-2300/ST, CT-2500/L CT-100, CT1550, CT-1551, CT-2300/ST, CT-2500/L, UP-14ZLW	100	1000	Yellow
BSN18-C	22 – 18	0.115	1.15			1000	Red
BSN18-M		1.15	9/32		1000	0	
BSN14-C	16 – 14	0.148	1.15		100	1000	Blue
BSN14-M		1.15	9/32		1000	0	
BSN10-L	12 – 10	0.21	1.14		50	50	Yellow

Butt Splices, Vinyl Insulated

BSV18X-LY	22 – 18	0.17	1.03	CT-100, CT1550, CT-1551, CT-2300/ST, CT-2500/L, UP-14ZLW	50	500	Red
BSV18X-MY		1.04	5/16		1000	0	
BSV14X-L	16 – 14	0.2	1.04		50	500	Blue
BSV14X-M		1.04	5/16		1000	0	
BSV10X-Q	12 – 10	0.25	1.18		25	250	Yellow
BSV10X-D		1.18	5/16		1000	0	

Butt Splices, Nylon Insulated

Part Number	Wire Range AWG	Max Wire Insul Dia. in.	Figure Dimensions Length in.	CA9 Series Crimp Die	CA-800/EZ Series Crimp Die	Color Code
BSN14-3K	18 – 14	0.17	0.95	CD9-2A	CD-800-2	Blue
BSN18-3K	22 – 16	0.15		CD9-1A	D-800-1	Red

Heat Shrink, Butt Splices

Part Number	Wire Range AWG	Max Ins. in.	Figure Dimension Length in.	Wire Strip Length in.	Recommended Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
BSh18-Q	22 – 18	0.17	1.45	5/16	CT-310	25	125	Red
BSh14-Q	16 – 14	0.19						Blue
BSh10-E	12 – 10	0.24	1.64			20	100	Yellow

Non-Insulated, Butt Splices

Part Number	Wire Range (AWG)	Figure Dimensions			Std. Pkg. Qty.	Std. Ctn. Qty.
		L in.	W in.	H in.		
BS10-D	12 – 10	0.63	0.22	0.23	500	0



BSN22-C



BSV18X-LY



BSN14-3K



BSh18-Q



BS10-D

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Insulated Ferrules, Single/Twin Wire DIN End Sleeve

Part Number	Wire Range AWG (mm ²)	Max Wire Insul Dia. in. (mm)	Figure Dimensions			Wire Strip Length in. (mm)	Recom- mended Installation Tool	Std. Pkg. Qty.	Color		
			L in. (mm)	P in. (mm)	ID in. (mm)						
Insulated Ferrules, Single Wire DIN End Sleeve											
FSD73-8-D	24 (0.25)	0.07 (2.0)	0.49 (12.5)	0.31 (8.0)	0.03 (0.8)	15/32 (11.9)	CT-1002, CT-1123, CT-2523CH		Yellow		
FSD74-8-D	24 – 22 (0.34)										
FSD75-8-D	22 – 20 (0.5)	0.09 (2.5)	0.53 (13.5)	0.39 (10.0)	0.04 (1.1)				White		
FSD75-10-D			0.61 (15.5)			17/32 (13.5)					
FSD76-8-D	18 (0.75)	0.11 (2.8)	0.55 (14.0)	0.31 (8.0)	0.05 (1.3)	15/32 (11.9)			Gray		
FSD76-10-D			0.63 (16.0)			0.39 (10.0)				17/32 (13.5)	
FSD77-6-D	– (1.0)		0.49 (12.5)	0.24 (6.0)		3/8 (9.5)		500	Red		
FSD77-8-D			0.57 (14.5)			0.31 (8.0)				0.06 (1.5)	15/32 (11.9)
FSD77-10-D			0.65 (16.5)			0.39 (10.0)					17/32 (13.5)
FSD77-12-D	16 (1.5)	0.12 (3.0)	0.73 (18.5)	0.47 (12.0)		5/8 (15.9)			Black		
FSD78-8-D			0.57 (14.5)			0.31 (8.0)				0.07 (1.8)	15/32 (11.9)
FSD78-10-D			0.65 (16.5)			0.39 (10.0)					17/32 (13.5)
FSD78-12-D	14 (2.4)	0.17 (4.2)	0.73 (18.5)		0.07 (1.8)	5/8 (15.9)			Blue		
FSD80-8-D			0.59 (15.0)			0.09 (2.3)				15/32 (11.9)	
FSD80-12-D	12 (4.0)	0.19 (4.8)	0.75 (19.0)		0.11 (2.9)	17/32 (13.5)			Gray		
FSD81-10-D			0.69 (17.5)								
FSD81-12-C	10 (6.0)	0.24 (6.2)	0.79 (20.0)		0.14 (3.6)	5/8 (15.9)		100	Yellow		
FSD82-12-C											
FSD83-12-C	8 (10.0)	0.30 (7.5)	0.83 (21.0)						Red		



FSD73-8-D

Insulated Ferrules, Twin Wire DIN End Sleeve

FTD75-8-D	22 – 20 (0.5)	0.87 (2.2)	0.59 (15.0)	0.31 (8)	0.06 (1.5)	7/16 (11.2)	CT-1002, CT-1003, CT-1090, CT-1123, CT-1160, CT-1170, CT-2300/ST WITH CD-090, CT-2500/L (CT-2523CH), CTFP-25, CTFP-40	500	White
FTD77-8-D	– (1.0)	0.11 (2.27)			0.67 (17.0)				0.39 (10)
FTD77-10-D			16 (1.5)	0.12 (3.0)		0.63 (16.0)			
FTD78-8-D	14 (2.5)	0.15 (3.7)			0.73 (18.5)			0.39 (10)	0.11 (2.9)
FTD78-12-D			12 (4.0)	0.17 (4.3)		0.91 (23.0)			
FTD80-10-TL	10 (6.0)	0.19 (4.8)			0.98 (25.0)			0.55 (14)	0.18 (4.6)
FTD80-13-TL			250	100		Yellow			
FTD81-12-C									
FTD82-14-C									



FTD75-8-D

Insulated Ferrules on Strips, Single Wire

FSD78-8-DSL0	16 (1.5)	0.13 (3.2)	0.60 (15.2)	0.31 (8.0)	0.09 (2.3)	13/32 (10.0)	CT-1000	500	Black
---------------------	----------	------------	-------------	------------	------------	--------------	---------	-----	-------



FSD78-8-DSL0

Ferrules, Non-Insulated

Part Number	Wire Range AWG (mm ²)	Figure Dimensions			Wire Strip Length in. (mm)	Recommended Installation Tool	Std. Pkg. Qty.
		L in. (mm)	ID in. (mm)	OD in. (mm)			
F82-10-M	10 (6)	0.39 (10)	0.14 (3.5)	0.15 (3.9)	13/32 (10)	CT-1002, CT-1003, CT-1123, CT-1090, CT-1160, CT-1170, CT-2300/ST (CD-090), CT-2500/L (CT-2523CH)	1000
F83-12-D	8 (10)	0.47 (12)	0.18 (4.5)	0.19 (4.9)	15/23 (12)	CD-090, CT-1003, CR-1004, CT-1090, CT-1104, CT-1123, CT-1160, CT-1170, CR-1504CH, CT-2523CH	500
F86-25-C	2 (35)	0.98 (25)	0.33 (8.3)	0.34 (8.7)	31/32 (25)	CT-1005	100
F89-25-L	2/0 (70)		0.49 (12.5)	0.52 (13.3)		CD-920-F89, CD-2001-F89	50



F82-10-M

WIRING DUCTS

Panduct® Type F Narrow Slot Wiring Duct	154
Panduct® Type G Wide Slot Wiring Duct	155
Panduct® Flush Cover Type D Round Hole Wiring Duct	156
Panduct® Type FS Solid Wall Wiring Duct	156
Panduct® Type NE Halogen-Free Wiring Duct	156
Panduct® Type NNC Halogen-Free Metric Wiring Duct	156
Panduct® Type MC Metric Narrow Slot Wiring Duct	156
Panduct® Type H Hinged Cover Wide Slot Wiring Duct	156
Panduct® PanelMax™ Corner Wiring Duct	157
Panduct® PanelMax™ DIN Rail Wiring Duct	157
Panduct® Type FL Flexible Wiring Duct	157
Panduct® Type G and H Wiring Duct Wire Retainers	157
Panduct® Divider Wall	157

Panduct® Type F Narrow Slot Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part number	Base Ctn. Qty.	Cover Ctn. Qty.	Color	
F.75X1.5LG6	0.94 x 1.57 (23.6 x 39.9)	0.20 (5.0)	C.75LG6	120	120	Light Gray	
F.75X1.5WH6			60	White			
F1X1LG6			120	C1LG6		Light Gray	
F1X1WH6				C1WH6		White	
F1X1.5LG6	C1LG6			Light Gray			
F1X1.5WH6	C1WH6			White			
F1X2LG6	1.25 x 2.12 (32.0 X 53.8)		C1LG6	Light Gray			
F1X2WH6			C1WH6	White			
F1X3LG6			1.25 x 3.13 (32.0 X 79.4)	C1LG6		Light Gray	
F1X3WH6				C1WH6		White	
F1X4LG6	1.25 x 4.10 (32.0 x 104.1)			C1LG6		Light Gray	
F1X4WH6				C1WH6		White	
F1.5X1.5LG6			1.75 x 1.62 (44.5 x 41.1)	C1.5LG6		Light Gray	
F1.5X2LG6				120		C1.5WH6	White
F1.5X2WH6	C1.5LG6					Light Gray	
F1.5X3LG6	C1.5WH6					White	
F1.5X3WH6	1.75 x 3.12 (44.5 x 79.2)		C1.5LG6			Light Gray	
F1.5X4LG6			1.75 x 4.10 (44.5 x 104.1)	C1.5WH6		White	
F2X2LG6				2.25 x 2.12 (57.2 x 53.8)		C2LG6	Light Gray
F2X2WH6						C2WH6	White
F2X3LG6	2.25 x 3.14 (57.2 x 79.8)					C2LG6	Light Gray
F2X3WH6			C2WH6			White	
F2X4LG6				Light Gray			
F2X4WH6				White			
F2X5LG6	2.25 x 5.10 (57.2 x 129.5)			C2LG6		Light Gray	
F2X5WH6			C2WH6	White			
F2.5X3LG6			2.75 x 3.12 (69.9 x 79.2)	C.52LG6		Light Gray	
F3X2LG6				C2LG6		60	
F3X2WH6	C2WH6			White			
F3X3LG6	C2LG6			Light Gray			
F3X3WH6	3.25 x 3.13 (82.6 x 78.7)		C2WH6	White			
F3X4LG6			3.25 x 4.10 (82.6 x 104.1)	C2LG6		Light Gray	
F3X4WH6				C2WH6		White	
F3X5WH6						3.25 x 5.10 (82.6 x 129.5)	Light Gray
F3X5LG6	White						
F4X3LG6	4.25 x 3.12 (108.0 x 79.2)		C2LG6				Light Gray
F4X3WH6			C2WH6	White			
F4X4LG6			4.25 x 4.10 (108.0 x 104.1)	C2LG6		Light Gray	
F4X4WH6				C2WH6		White	
F4X5WH6	4.25 x 5.10 (108.0 x 129.5)					C2LG6	
F4X5LG6							
F6X4LG6		6.25 x 4.15 (158.8 x 105.4)	C4LG6		Light Gray		



F.75X1.5LG6



F2X4WH6

Panduct® Type G Wide Slot Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part number	Base Ctn. Qty.	Cover Ctn. Qty.	Color																											
G.5X2LG6	0.69 x 2.03 (17.5 x 51.6)	0.31 (7.9)	C.5LG6	120	120	Light Gray																											
G.75X2LG6	0.94 x 2.03 (23.6 x 51.7)		C.75LG6																														
G1X1LG6	1.25 x 1.12 (32.0 x 28.4)		C1LG6																														
G1X1LG6-A																																	
G1X1.5LG6	1.25 X 1.62 (32.0 X 41.1)																																
G1X1.5WH6																																	
G1X2LG6	1.25 x 2.12 (32.0 X 53.8)																																
G1X2LG6-A																																	
G1X2WH6	C1WH6																																
G1X3LG6	C1LG6																																
G1X3LG6-A	1.25 x 3.12 (32.0 x 79.2)		C1WH6																														
G1X3WH6																																	
G1X4LG6	1.25 x 4.10 (32.0 x 104.1)		C1LG6	60																													
G1X4WH6			C1WH6																														
G1.5X1.5LG6	1.75 x 1.62 (44.5 x 41.1)		C1.5LG6	120																													
G1.5X2LG6	1.75 x 2.12 (45.5 x 53.8)		C1.5WH6																														
G1.5X2WH6																																	
G1.5X3LG6	1.75 x 3.12 (44.5 x 79.2)		C1.5LG6																														
G1.5X3WH6			C1.5WH6																														
G1.5X4LG6	1.74 x 4.10 (44.5 104.1)		C1.5LG6	60																													
G1.5X4WH6			C1.5WH6																														
G2X1.5LG6	2.25 x 1.62 (57.2 x 41.1)		C2LG6	120																													
G2X2LG6	2.25 x 2.12 (57.2 x 53.8)		C2LG6																														
G2X2WH6			C2WH6																														
G2X2BL6			C2BL6																														
G2X2LG6EMI			C2LG6																														
G2X3LG6	C2WH6																																
G2X3LG6-A																C2BL6																	
G2X3WH6																																	
G2X3BL6																																	
G2X4LG6																																	
G2X4WH6																																	
G2X5LG6																																	
G3X2LG6																																	
G3X3LG6																																	
G3X3WH6																																	
G3X3BL6																																	
G3X4LG6																																	
G3X4WH6																																	
G3X5LG6																																	
G4X3LG6																																	
G4X4LG6																																	
G4X4WH6																																	
G4X4BL6																																	
G4X5LG6																																	
G6X4LG6																																	
G6X4WH6																																	



G.5X2LG6



G1.5X3WH6

Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions

Terminals

Wiring Ducts

Stronghold
Contractor
Products

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

Panduct® Flush Cover Type D Round Hole Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part Number	Base Ctn. Qty.	Cover Ctn. Qty.	Color
D1.5X4LG6	1.75 x 4.10 (44.5 x 104.1)	—	C2LG6	60	120	Light Gray
D2X4LG6	2.25 x 4.10 (57.2 x 104.1)					



D1.5X4LG6

Panduct® Type FS Solid Wall Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part Number	Base Ctn. Qty.	Cover Ctn. Qty.	Color
FS2X2LG6NM	2.25 x 2.14 (57.2 x 54.4)	—	C2LG6	120	120	Light Gray



FS2X2LG6NM

Panduct® Type NE Halogen-Free Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part Number	Base Ctn. Qty.	Cover Ctn. Qty.	Color
NE1X1WH6	1.14 x 1.06 (29.0 x 26.9)	0.31 (7.9)	NE1WH6	120	120	White
NE1X2WH6	1.14 x 2.06 (29.0 x 52.3)					
NE1X3WH6	1.14 x 3.06 (29.0 x 77.7)			60		
NE1X4WH6	1.14 x 4.06 (29.0 x 103.1)		NE2WH6	120		
NE2X1WH6	2.14 x 1.08 (54.4 x 27.7)					
NE2X2WH6	2.14 x 2.08 (54.4 x 52.8)			60		
NE2X2WH6-A						
NE2X3WH6	2.14 x 3.08 (54.4 x 77.7)		NE3WH6			
NE2X4WH6	2.14 x 4.08 (54.4 x 103.1)					
NE3X4WH6	3.14 x 4.06 (79.8 x 103.1)					
NE3X5WH6	3.14 x 5.06 (79.8 x 128.5)	0.38 (9.7)	NE4WH6			
NE4X3WH6	4.14 x 3.06 (105.2 x 77.7)	0.31 (7.9)				
NE4X4WH6	4.14 x 4.06 (105.2 x 103.1)					



NE1X1WH6

Panduct® Type NNC Halogen-Free Metric Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part Number	Base Ctn. Qty.	Cover Ctn. Qty.	Color
NNC50X75LG2	1.95 x 2.85 (49.5 x 72.4)	0.39 (9.7)	—	10	10	Light Gray
NNC75X75WH2	2.97 x 2.85 (75.4 x 72.4)					White



NNC50X75LG2

Panduct® Type MC Metric Narrow Slot Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part Number	Base Ctn. Qty.	Cover Ctn. Qty.	Color
MC50X75IG2	1.95 x 2.85 (49.5 x 72.4)	0.20 (5.0)	—	10	10	International Gray



MC50X75IG2

Panduct® Type H Hinged Cover Wide Slot Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part Number	Base Ctn. Qty.	Cover Ctn. Qty.	Color
H1.5X2LG6	1.75 x 1.98 (44.5 x 50.3)	0.31 (7.9)	H1.5LG6	120	120	Light Gray
H1.5X2BL6			H2LG6	60		Black
H2X4LG6	2.17 x 4.10 (55.1 x 104.1)					Light Gray



H1.5X2LG6

Panduct® PanelMax™ Corner Wiring Duct

Part Number	Duct Size W x H in. (mm)	Slot Width in. (mm)	Cover Part Number	Base Ctn. Qty.	Cover Ctn. Qty.	Color
CWD3LG6	4.40 x 3.57 (111.8 x 90.7)	0.20 (5.0)	C2LG6	24	120	Light Gray
CWD4LG6	5.33 x 4.58 (135.3 x 115.7)					



CWD3LG6

Panduct® PanelMax™ DIN Rail Wiring Duct

Part Number	Description	Color	Std. Ctn. Qty.
DRD22LG6	2 in. height PanelMax™ DIN Rail Wiring Duct with dual wiring channels. 6.25 in. W x 2.12 in. H (158.7mm x 54.0mm). Base, covers and DIN rail fasteners included.	Light Gray	6 ft.
DRD33LG6	3 in. height PanelMax™ DIN Rail Wiring Duct with dual wiring channels. 7.25 in. W x 3.14 in. H (184.1mm x 79.9mm). Base, covers and DIN rail fasteners included.		
DRD44LG6	4 in. height PanelMax™ DIN Rail Wiring Duct with dual wiring channels. 8.23 in. W x 4.12 in. H (209.0mm x 104.8mm). Base, covers and DIN rail fasteners included.		
DRD44WH6		White	



DRD22LG6

Panduct® Type FL Flexible Wiring Duct

Part Number	Duct Size W x H in. (mm)	Length in. (mm)	Std. Pkg. Qty.
FL12X12LG	0.47 x 0.47 (12 x 12)	19.7 (500)	112
FL12X12LG-AV			
FL25X25LG	0.98 x 0.98 (25 x 25)		70
FL25X25LG-AV			
FL50X50LG	1.97 x 1.97 (50 x 50)		32
FL50X50LG-AV			



FL12X12LG

Panduct® Type G and H Wiring Duct Wire Retainer

Part Number	For Nominal Duct Width in. (mm)	For Nominal Duct Height in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
WR2-C	2.00 (50.8)	2.00 – 4.00 (50.8 – 101.6)	100	100



WR2-C

Panduct® Divider Wall (Mounting Base)

Part Number	Used with Anchors	Std. Pkg. Qty.	Std. Ctn. Qty.
DB-C	Panduit NR1 or #8, #10, M4 or M5 screw	100	100



DB-C

Panduct® Divider Wall (Slotted Divider Wall)

Part Number	For Nominal Duct Width in. (mm)	Length ft.	Std. Pkg. Qty.	Std. Ctn. Qty.	Color
SD2H6	2.0 (50)	6	6	120	Light Gray
SD3H6	3.0 (75)				
SD3EMI					
SD4EMI	4.0 (100)				
SD4H6					



SD2H6



STRONGHOLD CONTRACTOR PRODUCTS

StrongHold Electrical Tape.....	159
StrongHold Terminals.....	160
StrongHold Wire Marker Books	162
StrongHold Supports and Fasteners.....	163

StrongHold Electrical Tape



ST88-075-66BK



ST35-075-66BU

Heavy Duty Electrical PVC Vinyl Tape Offering

Part Number	Cast Qty.	Min. Order Qty.	Thickness in. (mm)	Dimension	Color
ST88-075-66BK	100	20	0.0085 (0.21)	0.75 in. x 0.0085 in. x 66 ft.	Black
ST88-100-108BK	80		Electrical Tape	1.0 in. x 0.0085 in. x 66 ft.	
ST88-150-66BK	100			1.5 in. x 0.0085 in. x 66 ft.	
ST88-200-66BK	40			2.0 in. x 0.0085 in. x 66 ft.	

Professional Grade Electrical PVC Vinyl Tape Offering

ST35-075-66BU	20	20	0.007 (0.18)	0.75 in. x 0.007 in. x 66 ft.	Blue
ST35-075-66BR					Brown
ST35-075-66GY					Gray
ST35-075-66GR					Green
ST35-075-66VI					Violet
ST35-075-66OR					Orange
ST35-075-66WH					White
ST35-075-66RD					Red
ST35-075-66VI					Violet
ST35-075-66YL					Yellow
ST43-075-66BK					Black

Copper Cabling Systems

Fiber Optics Systems

Industrial Networks

Audio Video Systems

NetKey Cabling Systems

Racks and Cabinet Systems

Power Management

Cable Routing Systems

Cable Management Accessories

Abrasion Protection

Cable Cleats

Cable Ties

Cable Accessories

Identification

Power Connectors

Grounding Connections

Safety Solutions

Terminals

Wiring Ducts

Stronghold Contractor Products

StrongHold Electrical Tape, continued

High Voltage Electrical PVC Vinyl Tape Offering

Part Number	Part Description	Width in. (mm)	Length ft. (m)	Thickness in. (mm)	Voltage	Temp-erature	Moisture Resistant	UV Resis-tant	Min. Order Qty.	Color
ST130-075-30BK	Linerless High Voltage Rubber Tape	0.75 (19)	30 (9.1)	0.3 (0.76)	600V - 69KV	90°C Max	Y	Y	20	Black
ST130-100-30BK		1.0 (25)								
ST130-150-30BK		1.5 (38)							10	



ST130-075-30BK



ST23-075-30BK

ST23 Series High Voltage, Rubber Tape with Liner

ST23-075-30BK	High Voltage Rubber Tape with Liner	0.75 (19)	30 (9.1)	0.3 (0.76)	600V - 69KV	90°C Max	Y	Y	20	Black
---------------	-------------------------------------	-----------	----------	------------	-------------	----------	---	---	----	-------

ST2155 Series Mid-Grade Rubber, Splicing Tape with Liner, Rubber Splicing Tape, Splicing Tape with Liner

ST2155-075-22BK	Mid Grade Rubber Splicing Lined	0.75 (19)	22 (6.7)	0.3 (0.76)	600V Max	80°C Continuous	N	N	100	Black
-----------------	---------------------------------	-----------	----------	------------	----------	-----------------	---	---	-----	-------



ST2242-075-15BK

ST2242 Series Linerless Mid-Grade, Rubber Splicing Tape, Splicing Tape with Liner, Rubber Splicing Tape Splicing Tape with Liner

ST2242-075-15BK	Linerless Mid Grade Rubber Splicing Tape	0.75 (19)	15 (4.6)	0.3 (0.76)	600V - 69KV	90°C Max	Y	Y	35	Black
ST2242-150-15BK		1.5 (38)	Electrical Tape							

ST2210 Series Vinyl Mastic Tape, Rubber Splicing Tape, Splicing Tape with Liner, Rubber Splicing Tape, Splicing Tape with Liner

ST2210-400-10BK	Vinyl Mastic	4.0 (102)	10 (3)	0.05 (1.2)	600V Max	90°C Max	Y	Y	10	Black
-----------------	--------------	-----------	--------	------------	----------	----------	---	---	----	-------



ST2210-400-10BK

ST2210 Series Vinyl Mastic Tape, Rubber Splicing Tape, Splicing Tape with Liner, Rubber Splicing Tape, Splicing Tape with Liner

ST2200-650-400P	Vinyl Mastic	6.05 (165)	4.0 (102)	0.13 (3.3)	600V Max	90°C Max	Y	Y	50*	Black
-----------------	--------------	------------	-----------	------------	----------	----------	---	---	-----	-------



ST2200-650-400P

ST2226 Series Insulating Mastic Tape

ST2226-375-10BK	Insulating Mastic	3.75 (95)	10 (3)	0.125 (3.2)	600V Max	90°C Max	Y	Y	10	Black
-----------------	-------------------	-----------	--------	-------------	----------	----------	---	---	----	-------



ST2226-375-10BK

ST2228 Series Rubber Mastic Tape

ST2228-100-10BK	Rubber Mastic	1.0 (25)	10 (3)	0.065 (1.7)	2KV Max	90°C Max	Y	Y	20	Black
ST2228-200-10BK		2.0 (52)							10	



ST2228-200-10BK

ST2229 Series Insulating Mastic Pad Tape

ST2229-375P	Insulating Mastic Pad	3.75 (95)	0.312 (0.095)	0.125 (3.2)	600V Max	90°C Max	Y	Y	30	Black
-------------	-----------------------	-----------	---------------	-------------	----------	----------	---	---	----	-------



ST2229-375P

ST1755 Series Friction Tape

ST1755-075-60BK	Friction Tape	0.75 (19)	60 (18)	0.015 (0.38)	N/A	80°C Continuous	N	N	100	Black
-----------------	---------------	-----------	---------	--------------	-----	-----------------	---	---	-----	-------



ST1755-075-60BK

StrongHold Terminals

Ring Terminal

Part Number	Wire Range AWG	Stud/Tab Size	Color	Std. Pkg. Qty.
EV10-10RB-Q	12 – 10	#10	Yellow	25
EV10-8RB-Q		#8		
EV10-14RB-Q		1/4 in.		
EV10-6RB-Q		#6		
EV14-10RB-Q		#10		
EV14-14RB-Q	16 – 14	1/4 in.	Blue	
EV14-6RB-Q		#6		
EV14-8RB-Q		#8		
EV18-10RB-Q	22 – 18	#10	Red	
EV18-14RB-Q		1/4 in.		
EV18-6RB-Q		#6		
EV18-8RB-Q		#8		



EV10-10RB-Q

Fork Terminal

EV10-10FB-Q	12 – 10	#10	Yellow	25
EV10-8FB-Q		#8		
EV10-14FB-Q		1/4 in.		
EV10-6FB-Q		#6		
EV14-10FB-Q	16 – 14	#10	Blue	
EV14-14FB-Q		1/4 in.		
EV14-6FB-Q		#6		
EV14-8FB-Q		#8		
EV18-10FB-Q	22 – 18	#10	Red	
EV18-6FB-Q		#6		
EV18-14FB-Q	22 – 16	1/4 in.		



EDV10-250-Q

Female Disconnect Terminals

EDV10-250-Q	12 – 10	0.25 in. x 0.032 in.	Yellow	25
-------------	---------	----------------------	--------	----



Male Disconnect Terminals

EDV10-250M-Q	12 – 10	0.25 in. x 0.032 in.	Yellow	25
--------------	---------	----------------------	--------	----

EDV10-250M-Q

Copper Cabling
Systems

Fiber Optics
Systems

Industrial
Networks

Audio Video
Systems

NetKey Cabling
Systems

Racks and Cabinet
Systems

Power
Management

Cable Routing
Systems

Cable
Management
Accessories

Abrasion
Protection

Cable Cleats

Cable Ties

Cable
Accessories

Identification

Power
Connectors

Grounding
Connections

Safety
Solutions

Terminals

Wiring Ducts

Stronghold
Contractor
Products

Butt Splices

Part Number	Wire Range AWG	Color	Std. Pkg. Qty.
ESV10BX-Q	12 – 10	Yellow	25
ESV14BX-Q	16 – 14	Blue	5
ESV18BX-Q	22 – 18	Red	25



ESV10BX-Q

Step Down Splices

ESV10-ESV14-Q	#12-10 to 16-14, Yellow with Blue Color Ring	Yellow	25
ESV10-ESV18-Q	#12-10 to 22-18, Yellow with Red Color Ring		
ESV14-ESV18-Q	#16-14 to 22-18, Blue with Red Color Ring	Blue	
ESV6-ESV8-Q	#6 to 8, Blue with Red Color Ring		
ESV8-ESV10-Q	#8 to 12-10, Red with Yellow Color Ring	Red	
ESV8-ESV14-Q	#8 to 16-14, Red with Blue Color Ring		



ESV10-ESV14-Q

StrongHold Wire Marker Books

Pre-Printed Marker Books

Part Number	Legend	Total Markers Each Legend	Std. Ctn. Qty.	Min Order Qty. Book(s)
PCMB-1	0 thru 0	45	10	10
PCMB-2	A thru Z, 0 thru 15, +, -, /	10		
PCMB-3	1 thru 45	–		
PCMB-4	1, 2, 3	150		
PCMB-5	A , B, C,	–		
PCMB-6	T1, T2, T3			
PCMB-7	L1, L2, L3			
PCMB-8	1 thru 15	6		
	16 thru 90	4		
	A thru Z, +, -, /, 0	2		
PCMB-9	1, 2, 3, A, B, C	45		
	L1, L2, L3, T1, T2, T3	30		
PCMB-11	1 thru 30	15		
PCMB-12	A thru Z	15		
	+	8		
	-	7		
	Blank (write-on)	21		
PCMB-13	+, -, AC, DC	45		
	POS, NEG, GND NEUT	21		
	SPARE, Blank (write-on)	21		
		21		
PCMB-14	46 thru 90	10		
PCMB-15	0, +, -	15		
	1 thru 45	10		
PCMB-16	0 thru 33, A, B, C, +, -, L1, L2, L3, T1, T2, T3	10		
PCMB-25	5 0 thru 9 – L1, L2, L3, T1, T2, T3	45		
		15		



PCMB-1

Blank Self-Laminating Write-On Cable Marker Books

Part Number	Print-on Area in.	Width in. (mm)	Length in. (mm)	Markers Per Book	Std. Pkg. Books(s)	Std. Qty. Book(s)
PSCB-3Y	0.75	1.0 (25.4)	3.0 (76.2)	60	1	10
PSCB-5Y	1.0		5.0 (127.0)	30		
PSCB-6Y			6.0 (152.4)			
PSCB-12Y	0.62	0.50 (12.7)	1.5 (38.1)	180		
PSCB-13Y	0.75	1.5 (38.1)	3.0 (76.2)	40		
PSCB-16Y	1.0		6.0 (152.4)	20		



PSCB-3Y

Pre-Printed Marker Cards- PCM Types

Part Number	Legend	Width in. (mm)	Length in. (mm)	Markers per Card	Std. Pkg. Cards(s)	Std. Qty. Cards(s)
PCM-1	1	0.25 (6.35)	1.5 (38.1)	36	25	100
PCM-2	2					
PCM-3	3					
PCM-4	4					
PCM-5	5					
PCM-1-33	1 thru 33	0.27 (6.91)		33		



PCM-1

Cable Marker Dispensers

Part number	Description	Material	Color	Std. Pkg. Qty.
S100X225VARY	Self-Laminating Label Kit	Vinyl	White	1 roll 200 labels
S100X125VARY	Blank Self-Laminating Write-On Cable Marker Tape Dispenser Kit			
S100X225VAFY	Blank Self-Laminating Write-On Cable Marker Label Roll		White/ Clear	
S100X125VAFY	Blank Self-Laminating Write-On Cable Marker Label Roll			



S100X225VARY

StrongHold Supports and Fasteners

Electrical Box Mounting Support Brackets

Part Number	St. Depth in.	Std. Pkg. Qty.
PH4	2 1/2, 3 1/2, and 4	100
PH6	6	
PH23	2 1/2 and 3 1/2	



PH4

Stud Wall Adjustable Screw Gun Box Mounting Brackets

Part Number	Description	Std. Pkg. Qty.
PTSGB16	Mount box between studs spaced 11 in. – 18 in.	50



PTSGB16

J-Pro Hook with Drop Wires and Rod Clips

Part Number	Description	Std. Pkg. Qty.
J-Pro™ JP131 Series		
JP131DW-L20	Drop wire and threaded rod clip mount	50
JP131HBC25RBL20	Hammer-on beam clamp mount – 1/8 in. – 1/4 in. flange. Rotates 360°	
JP131SBC50RBL20	Screw-on beam clamp mount – up to 1/2 in. flange. Rotates 360°	
JP131CMB-L20	Ceiling mount – 3/16 in., 1/4 in., and 3/8 in. mounting holes	
JP131HBC50RBL20	Hammer-on beam clamp mount – 5/16 in. – 1/2 in. flange. Rotates 360°	
JP131W-L20	Wall mount – one 1/4 in. mounting hole	
JP4CMB-X20	Ceiling mount – 3/16 in., 1/4 in., and 3/8 in. mounting holes	
JP4HBC50RB-X20	Hammer-on beam clamp mount – 5/16 in. – 1/2 in. flange. Rotates 360°	
JP4SBC50RB-X20	Screw-on beam clamp mount – up to 1/2 in. flange. Rotates 360°	
JP4HBC25RB-X20	Hammer-on beam clamp mount – 1/8 in. – 1/4 in. flange. Rotates 360°	
J-Pro™ JP2 Series		
JP2HBC50RB-L20	Hammer-on beam clamp mount – 5/16" – 1/2" flange. Rotates 360°	50
JP2HBC25RB-L20	Hammer-on beam clamp mount – 1/8" – 1/4" flange. Rotates 360°	
JP2CMB-L20	Ceiling mount – 3/16 in., 1/4 in., and 3/8 in. mounting holes	
JP2DW-L20	Drop wire and threaded rod clip mount	
JP2SBC50RB-L20	Screw-on beam clamp mount – up to 1/2 in. flange. Rotates 360°	
JP2W-L20	Wall mount – one 1/4 in. mounting hole	
JP4DW-X20	Drop Wire and Rod Clip	
J-Pro™ JP75 Series		
JP75DW-L20	Drop wire and threaded rod clip moun	50
JP75HBC25RB-L20	Hammer-on beam clamp mount – 1/8 in. - 1/4 in. flange. Rotates 360°	
JP75CMB-L20	Ceiling mount – 3/16 in., 1/4 in., and 3/8 in. mounting holes	
JP75SBC50RB-L20	Screw-on beam clamp mount – up to 1/2" flange. Rotates 360°	
JP75HBC50RB-L20	Hammer-on beam clamp mount – 5/16 in. – 1/2 in. flange. Rotates 360°	
JP75W-L20	Wall mount – one 1/4 in. mounting hole	
J-Pro™ JP4 Series		
JP4W-X20	Wall mount – one 1/4 in. mounting hole	50



JP131DW-L20



JP2HBC50RB-L20



JP75DW-L20



JP4W-X20

Acoustical Box to T-Bar Fasteners

Part Number	Description	Std. Pkg. Qty.
P512	Box to T-bar fastener for flush or 3/4 in. offset mount	50
P512A	Box to T-bar fastener allows up to 8 in. of height adjustment	25



P512

StrongHold ISO Risk of Electrical Shock Labels

Part Number	Legend	Color (Legend/ Background)	Width in. (mm)	Height in. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.
WL32Y	RISK OF ELECTRIC SHOCK SYMBOL	Black/Yellow	1.5 (38.1)	1.5 (38.1)	1	10
WL33Y	RISK OF ELECTRIC SHOCK SYMBOL		4.5 (114.3)	4.5 (114.3)		
WL35Y	CAUTION - HOT SURFACE WARNING		2 (50.8)	2 (50.8)		
WL36Y	WARNING - HOT SURFACE WARNING		2 (50.8)	2 (50.8)		



WL32Y



LEARN MORE:

www.panduit.com/government

CONTACT OUR DEDICATED FEDERAL TEAM:

FedGov@panduit.com