



## WORK INSTRUCTION

### PIN Code Management

<b>Applies to:</b>	SmartZone Users, EPA126 and EPA064 Gateways, Security
<b>Objective:</b>	Set up and manage PIN User Codes
<b>Documentation Reference:</b>	SmartZone DCIM User Manual – System Configuration Topics – Sensor
<b>Pre-Requisites:</b>	SmartZone user must have PIN Code access privileges

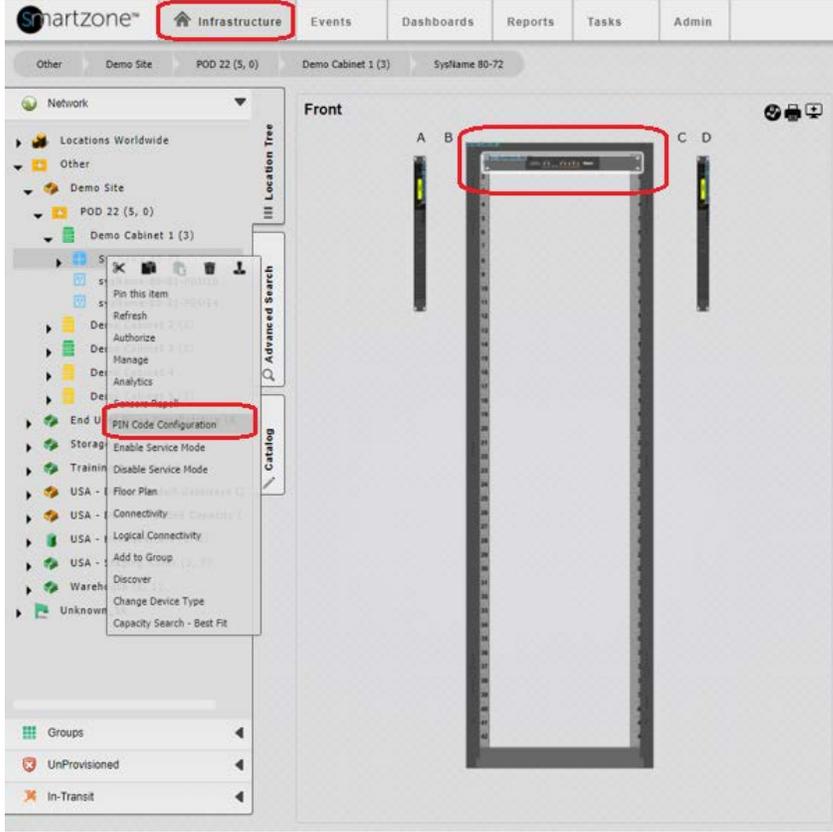
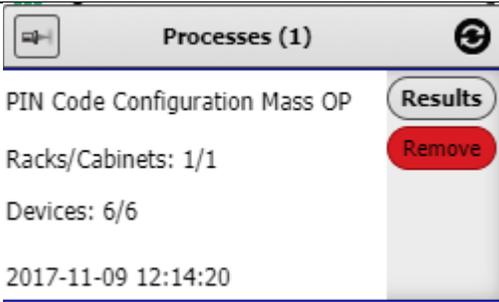
#### Description

Users can employ SmartZone DCIM and the SmartZone EPA126 or EPA064 Gateway Web Management Interface to enter PIN User Codes for temporary or permanent cabinet door access with expiration dates. The user can also stipulate the number of characters required for PIN User Codes based on settings in the Gateways.

#### Performing the Procedure

**Note:** This procedure applies only to EPA126 and EPA064 Gateways.

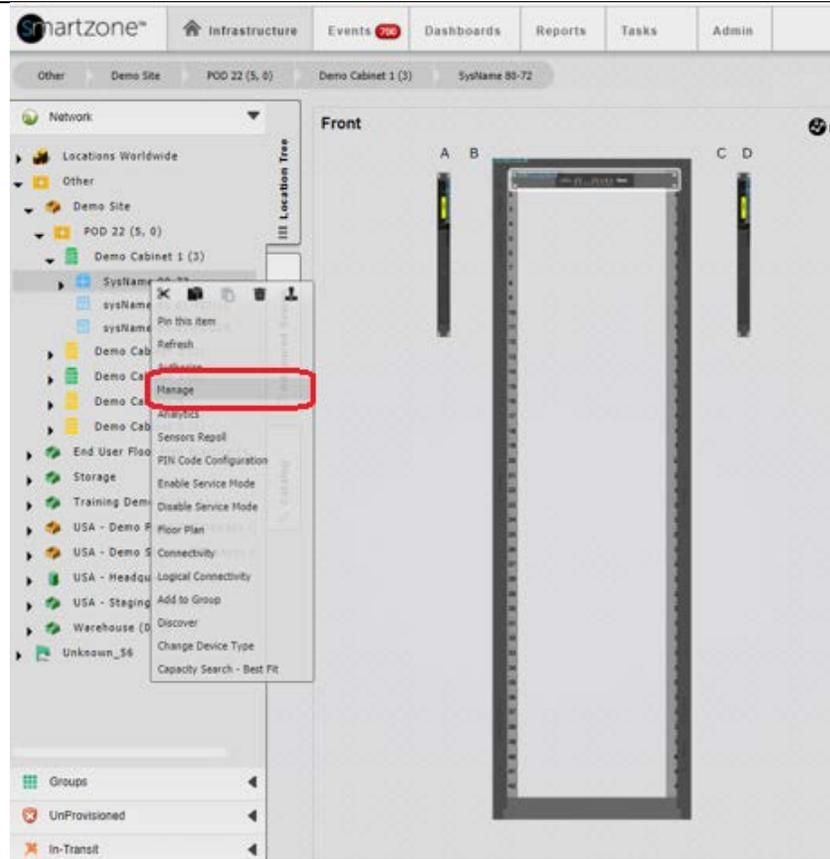
## PIN Code Management Tasks

Step	Instruction	Graphic	Result
1	<p>In SmartZone DCIM, go to the Infrastructure Module and find the cabinet with the desired Gateway(s) in the Location Tree. Right-click the cabinet and select PIN Code Configuration.</p>		<p>The Processes dialog box displays for the PIN Code Configuration Mass Operation.</p>
2	<p>Click <b>Results</b> in the Processes dialog box.</p>		<p>The PIN Code Configuration dialog box opens.</p>



4

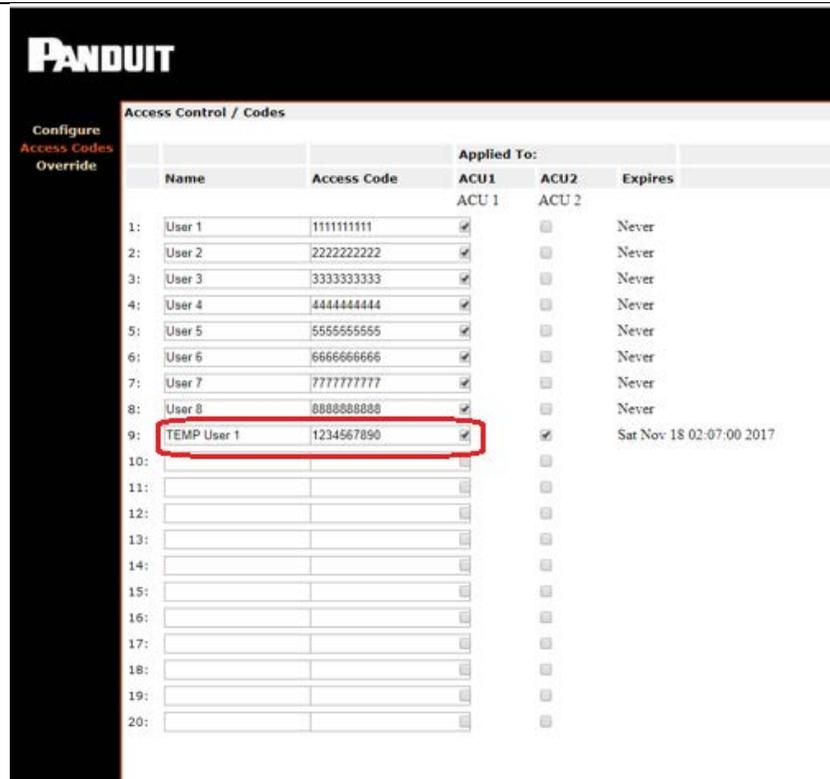
In the Location Tree, right-click the desired Gateway and select **Manage**.



The selected Gateway's Web Management Interface opens in a new browser tab to the Access Control/ Codes page.

5

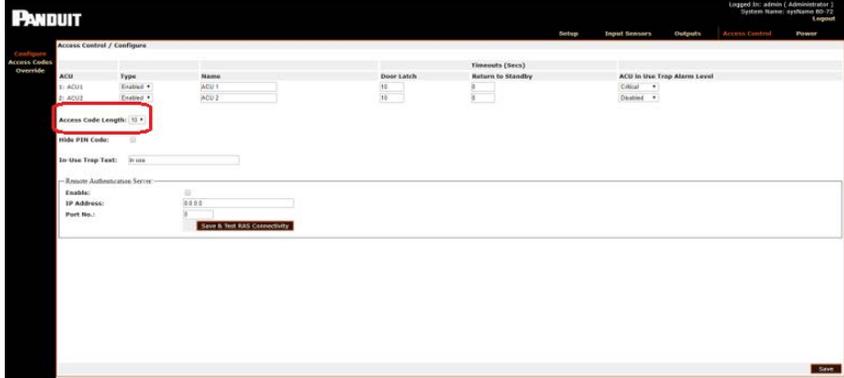
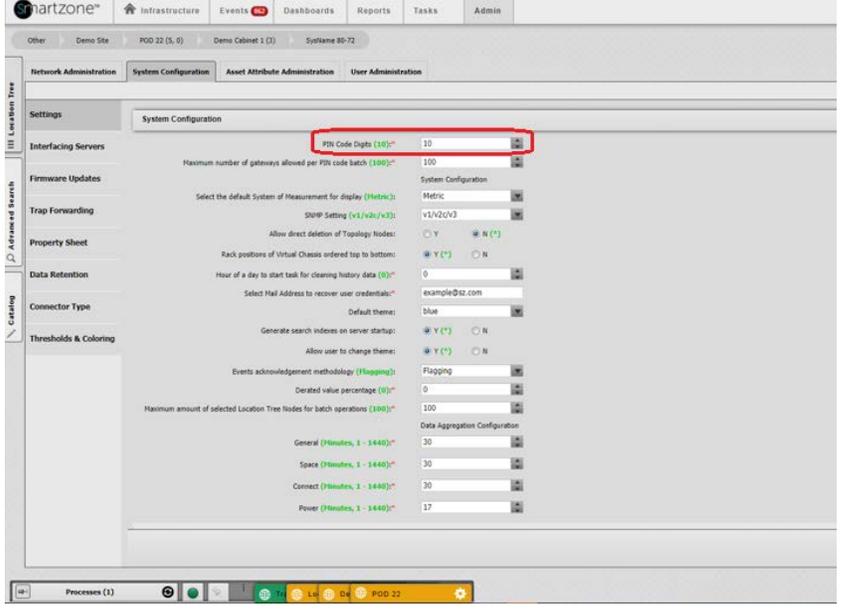
Review the page to verify that the changes were made.



The changes should be reflected on the Gateway Web Management Interface.

End of Steps

# Administrator Tasks

Step	Instruction	Graphic	Result
1	At the SmartZone Gateway Web Interface, go to Access Control/ Configure and enter the Access Code Length.		The length of the User Access PIN Code is set for the Gateway.
2	Go to Access Control/ Codes and enter the users and their associated codes.		The users and their PIN Codes are configured in the Gateway.
3	In SmartZone DCIM, go to Admin/System Configuration and set the Global PIN Code Digits to match the Gateway settings for Access Codes.		The PIN Code configuration in SmartZone DCIM matches the configuration settings in the Gateways.
<b>End of Steps</b>			

## End State

PIN User Codes are set for the Gateways in both SmartZone DCIM and the Gateway Web Management Interface, and the information is consistent across both platforms.