

Panduit SiteCommand Utility

Device Management Utility Software for Panduit Devices

User Manual

Software Version: 1.2.0

Document Revision: 1.1

Table of Contents

Section 1: Installing SiteCommand Utility	1
Section 2 – System Overview	3
SiteCommand Utility Software	3
System Requirements	3
Supported Web Browsers	3
Section 3 – Web Graphical User Interface (GUI).....	3
Connecting to SiteCommand Utility	3
Web Configuration	4
Introduction to the Web GUI	5
Side Bar	6
Header	7
Workspace.....	7
Section 4 – Firmware Management.....	8
Bulk Upload Firmware	8
Section 4 – Configuration Management	9
Bulk Upload Configuration	9
System Management	11
Section 6 – Help & Support	16
Appendix A: Uninstall SiteCommand Utility	17
Appendix B: Password Reset	18
Appendix C: System Restart.....	19

Table of Figures

Figure 1: Installation Completed	1
Figure 2: Launch SiteCommand Utility.....	2
Figure 3: Icon on Desktop	4
Figure 4: Login Page	4
Figure 5: Change Password	5
Figure 6: Web GUI Overview	5
Figure 7: Expanded/Collapsed Side Bar	6
Figure 8: Header	7
Figure 9: Workspace	7
Figure 10: Firmware Upload	8
Figure 11: Configuration Landing Page.....	9
Figure 12: Create Configuration Page.....	10
Figure 13: System Management Window	11
Figure 14: Apply Configuration	12
Figure 15: Configuration Submitted	12
Figure 16: Task History	13
Figure 17: Task Options	14
Figure 18: Failed Task.....	15
Figure 19: Help & Support Menu	16
Figure 20: About Window	16
Figure 21: Installed App	17
Figure 22: Restart Service	19

Section 1: Installing SiteCommand Utility

1. Double click / run the SiteCommand Utility installer file.
Note: Latest version of SiteCommand Utility is available at Panduit.com located here:
<https://www.panduit.com/en/support/download-center/power-distribution-units.html>
2. Follow the prompts on screen to complete the installation.
3. When prompted it is recommended to create **Desktop shortcut** to make it easier to launch the application.
4. After the installation is completed, click on the **Finish** button.

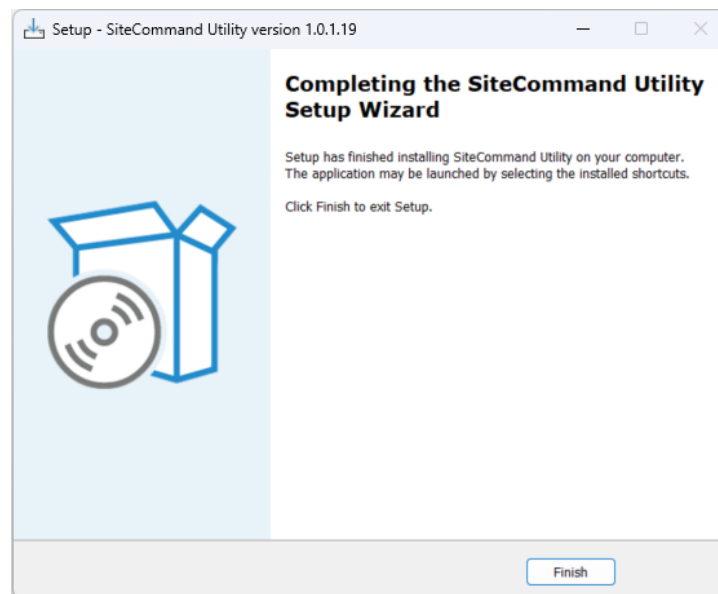


Figure 1: Installation Completed

5. Follow the instructions to launch the application.

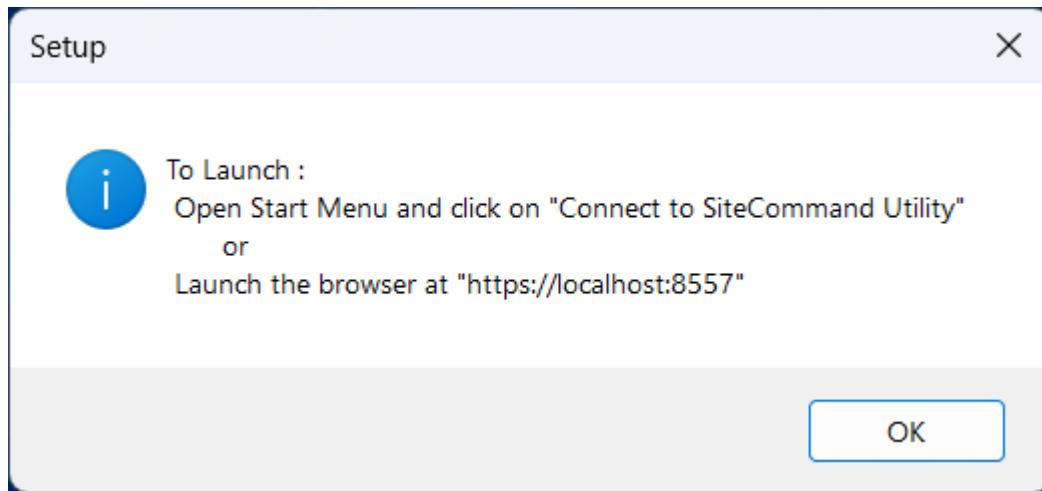


Figure 2: Launch SiteCommand Utility

Section 2 – System Overview

SiteCommand Utility Software

Panduit SiteCommand Utility is a web-based application that streamlines configuration and firmware management for multiple network-connected Panduit PDUs through a centralized interface.

Bulk Firmware Update enables administrators to maintain system security by easily updating device firmware at scale. By uploading a firmware file to SiteCommand Utility, administrators can initiate updates across all managed devices with a single action.

Bulk Configuration allows administrators to create device configurations using a CSV template and deploy them across multiple PDUs through SiteCommand Utility with just a few additional steps.

System Requirements

Operating System:

- 64-bit Windows OS

Hardware Minimum Requirements:

- Dual Core processor 2 GHz or faster
- 4 GB RAM or higher
- 10 GB hard drive

Supported Web Browsers

SiteCommand Utility is tested with the most recent version of Microsoft Edge, Google Chrome, and Firefox at the time of release.

Section 3 – Web Graphical User Interface (GUI)

Connecting to SiteCommand Utility

SiteCommand Utility is accessed via a web browser. Click on the “Connect to SiteCommand Utility” icon that was added to your desktop.




Figure 3: Icon on Desktop

Web Configuration

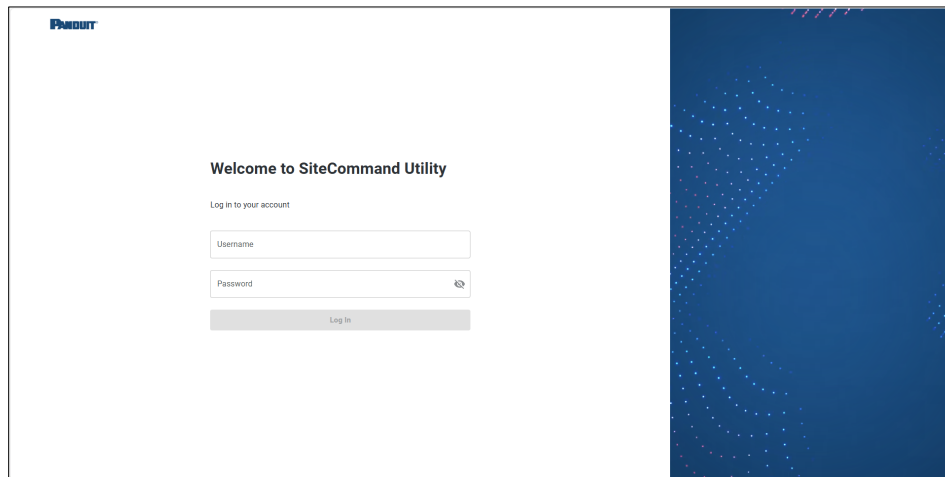



Figure 4: Login Page

Initial Login

For the initial login, enter **admin** in both the **Username** and **Password** fields.

You will then be prompted to create a new password:

1. Enter your current password.
2. Enter a new password. The password must be 8 to 40 characters and include at least one letter, one number, and one special character (e.g., !, @, #, \$).
3. Re-enter the new password to confirm.
4. Click **Submit** to complete the password update.

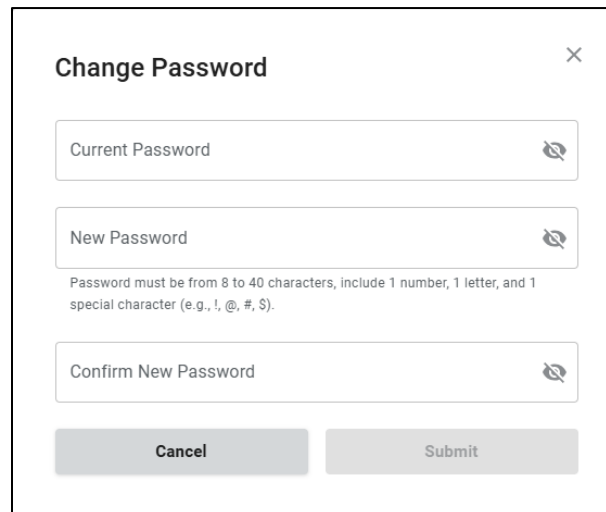

A modal dialog box titled "Change Password" with a close button (X) in the top right corner. It contains three input fields: "Current Password", "New Password", and "Confirm New Password". Each field has a toggle icon (an eye with a slash) to the right. Below the "New Password" field, there is a text requirement: "Password must be from 8 to 40 characters, include 1 number, 1 letter, and 1 special character (e.g., !, @, #, \$)." At the bottom of the dialog are two buttons: "Cancel" and "Submit".

Figure 5: Change Password

Introduction to the Web GUI

The SiteCommand Utility interface comprises three areas, shown below.

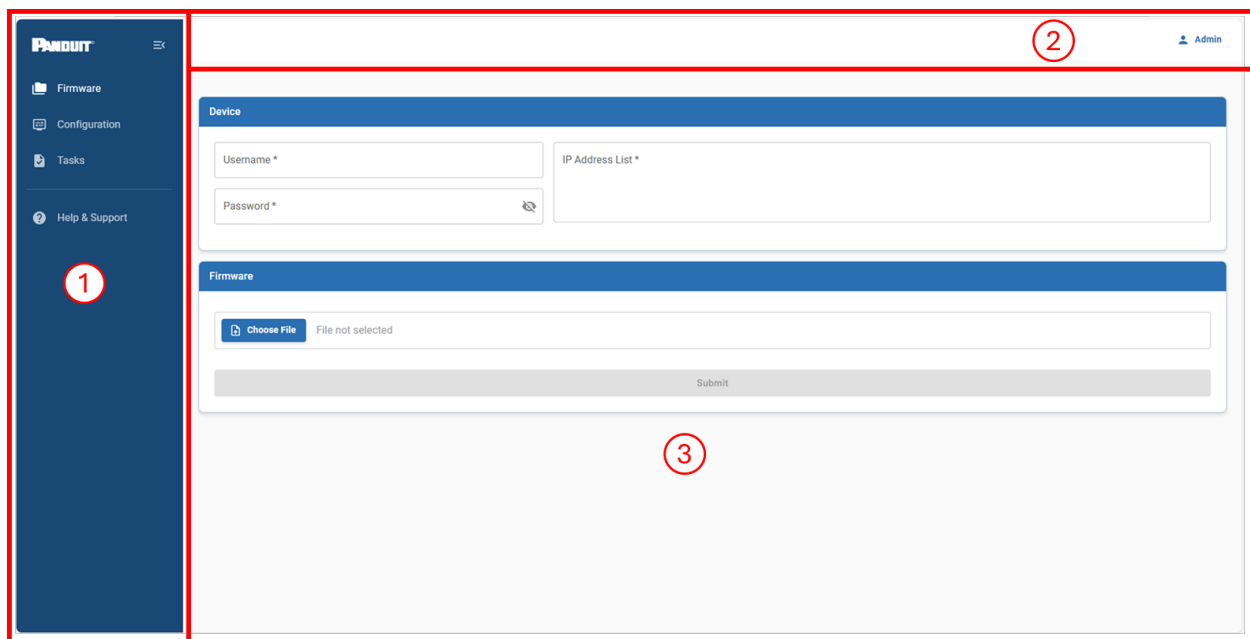


Figure 6: Web GUI Overview

1. Side Bar – Where the main menu is located.
2. Header – For admin tasks.

3. Workspace – Where users make changes / execute tasks.

Side Bar

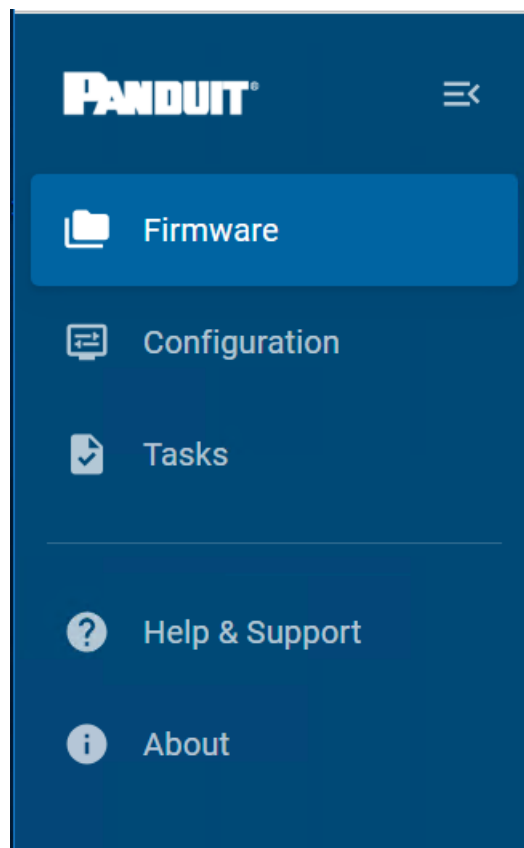


Figure 7: Expanded/Collapsed Side Bar

Option	Description
Firmware	Perform firmware updates to one or more managed devices
Configuration	Manage configuration updates to one or more managed devices
Tasks	View the status of a task (Firmware or Configuration)
Help & Support	Find additional information about SiteCommand Utility
About	Find the version number and copyright status

Header



Figure 8: Header

The Header is used to change the password or to log out.

Workspace

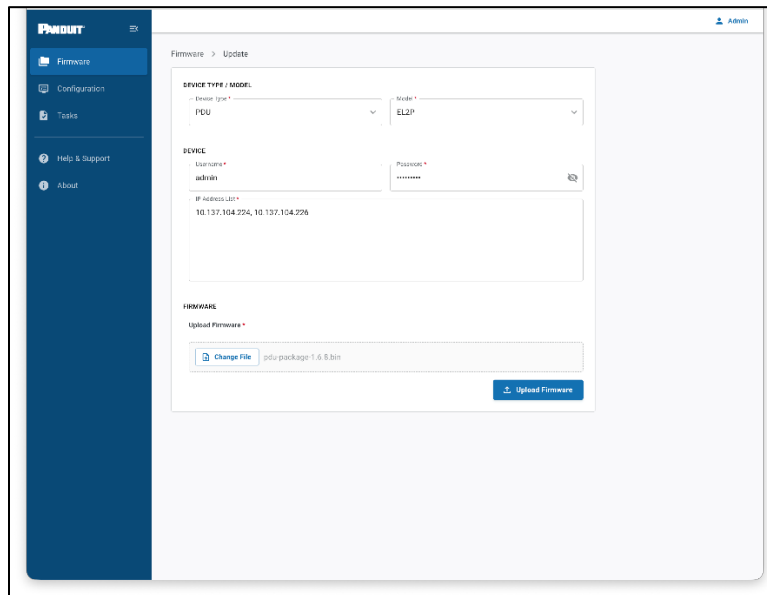


Figure 9: Workspace

Use the Workspace to perform tasks related to firmware updates or configuration changes, for example.

Section 4 – Firmware Management

Bulk Upload Firmware

To perform firmware updates, you have to be in the Firmware section, which is the default section after you log in.

1. Type the username and password of the managed device(s) that you want to connect to.

*Note: The username and password **must be the same** for all devices you want to bulk upload the firmware on.*

2. Enter the list of IP addresses separating them with a comma.
3. Click **Choose File** to select the firmware file from your local computer.
4. Confirm that all information is correct and then click **Submit**.
5. A pop-up window will show up confirming that a new task was created and that you can go to the Tasks section to view more details about the firmware upload process.

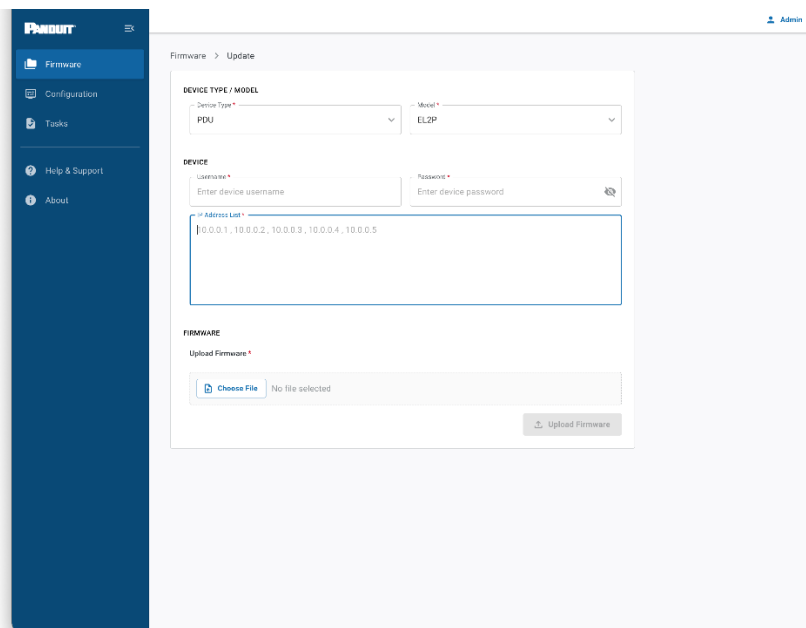
The screenshot shows the 'Firmware > Update' page in the Panduit SiteCommand Utility. On the left is a dark blue sidebar with navigation links: 'Firmware' (selected), 'Configuration', 'Tasks', 'Help & Support', and 'About'. The main content area is light gray. At the top right of the main area is a user profile icon labeled 'Admin'. The page title is 'Firmware > Update'. Below the title is a form with three sections: 'DEVICE TYPE / MODEL' with dropdowns for 'Device Type' (set to 'PDU') and 'Model' (set to 'EL2P'); 'DEVICE' with input fields for 'Username' and 'Password' (both with placeholder text 'Enter device username' and 'Enter device password' respectively); and 'FIRMWARE' with a file upload section. The file upload section has a 'Choose File' button and the text 'No file selected'. At the bottom right of the form is an 'Upload Firmware' button. Above the file upload section, there is a text area for 'IP Address List' containing the example text '10.0.0.1, 10.0.0.2, 10.0.0.3, 10.0.0.4, 10.0.0.5'.

Figure 10: Firmware Upload

Section 4 – Configuration Management

Bulk Upload Configuration

From the Configuration section:

1. Click the **Create Configuration** button. The Create Configuration allows the user to create a custom configuration directly from the SiteCommand Utility Tool.

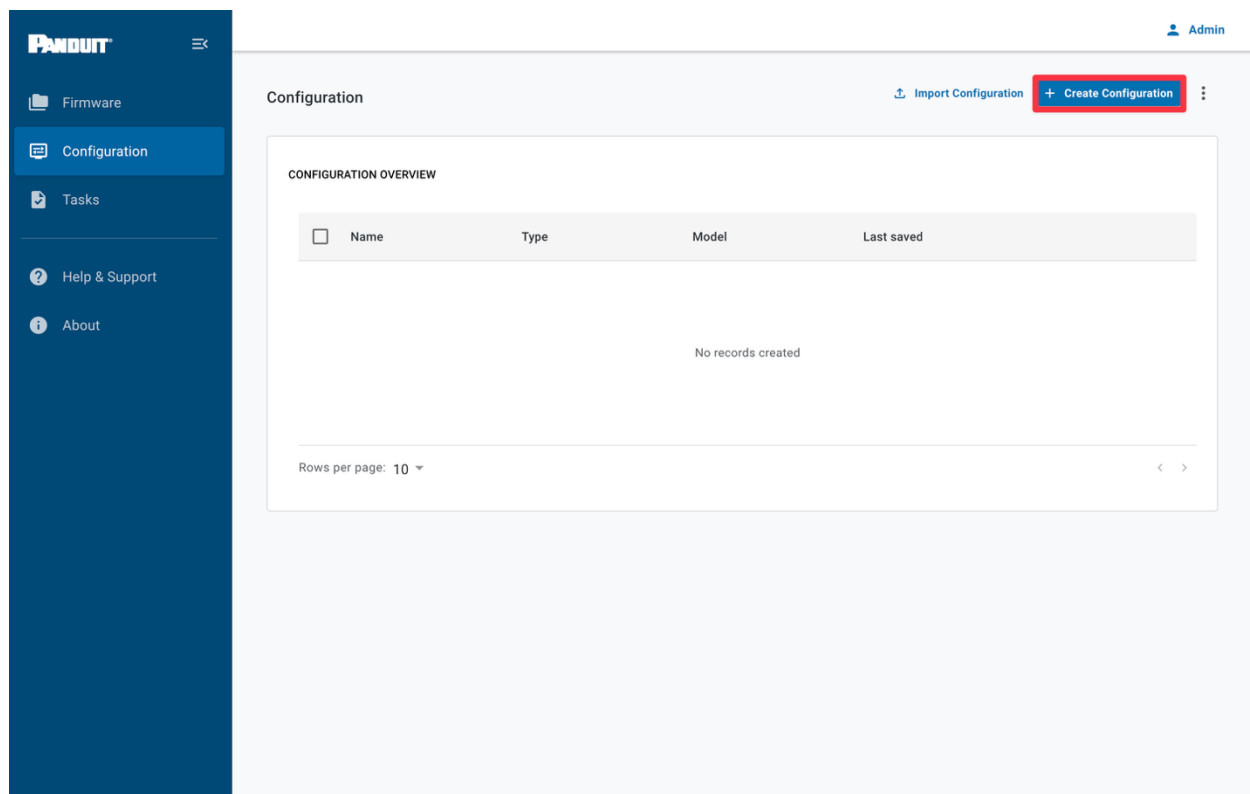


Figure 11: Configuration Landing Page

The Create Configuration popup window displays.

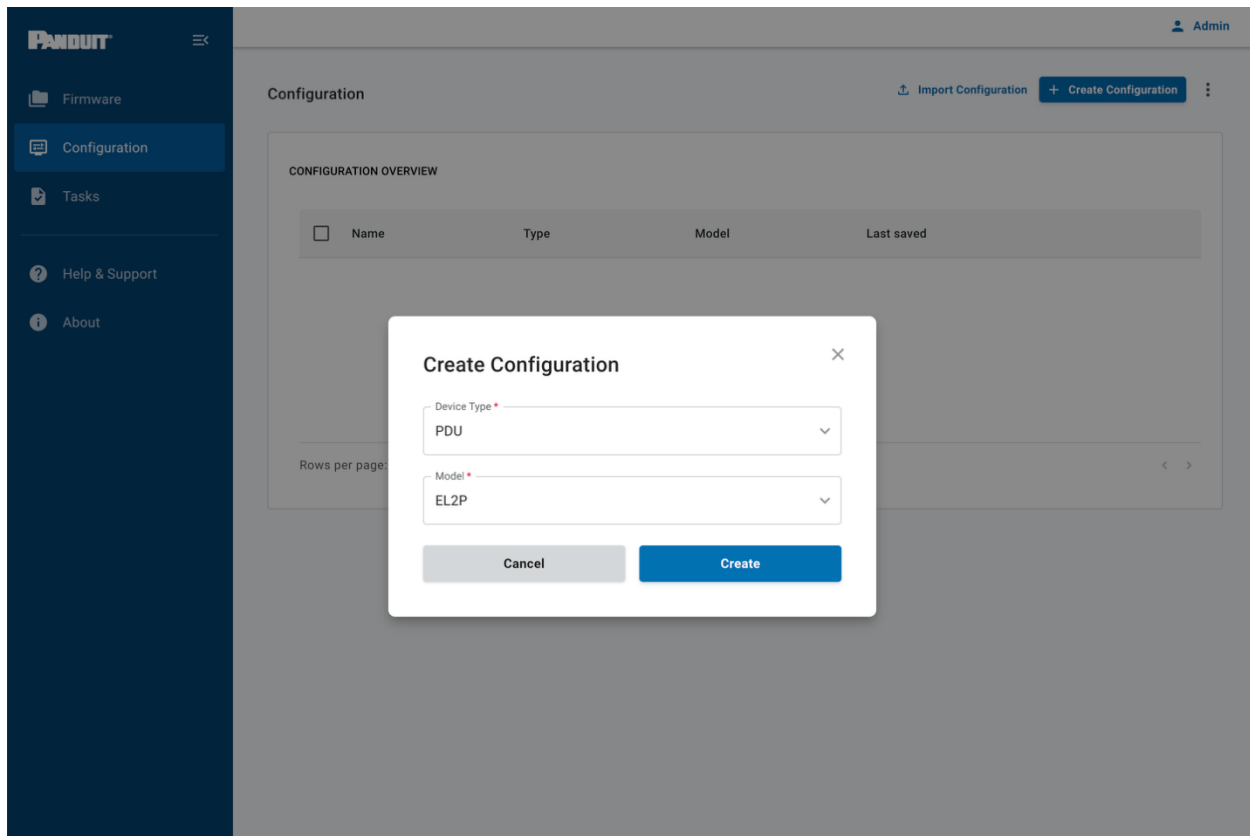


Figure 12: Create Configuration Page

2. Select the Device Type and Model you want to connect to from the dropdown menus.

Note: The username and password **must be the same** for all devices you want to upload the configuration file on.

3. Click **Create**.
4. The Configuration screen is displayed with the System Management tab selected by default. The navigation tabs provide access to the various configuration sections, each of which closely mirrors the corresponding configuration screen on the device..

System Management

1. In the **System Management** tab, update the desired fields. Repeat this process for any other configuration sections, such as Network and SNMP. When you have finished making your changes, click Save Configuration. A summary of your selected configuration changes is then displayed.

Configuration > * Unnamed *

Type: PDU | Model: EL2P

Save Configuration Apply Configuration

Red Save

System Management

SYSTEM INFORMATION

System Name: PDU 01

Contact Name: John Doe

Contact Email: john.doe@xyz.com

Contact Phone: +1 2398907867

Contact Location:

DATE & TIME

Select Date: 05/25/2026

Select Time: 13:05:05

Time Zone: (UTC-08:00) Pacific Time

Custom Time Zone:

REGION CONFIGURATION

Region: North America

LINK CONFIGURATION

Mode:

Role:

LCD CONFIGURATION

Enable USB Port: Do Not Change Status

Rotation:

Language:

Screen Mode:

Location:

Sleep Mode:

Location Color:

PDU 1 + Add PDU

UNIT INFORMATION

Unit Name: RD1_Primary

RACK LOCATION

Room Name: Room1

Room Number: RD1

Rack Name: Rack 1

Rack ID:

Rack Height:

POWER PANEL & CORE LOCATION

Power Panel Name:

Core Location:

Core U. Position:

Figure 13: System Management Window

- Review the selections and click **Confirm Configuration**. The Save Configuration popup displays.
- Enter a name for the configuration and click **Save**. Your new configuration displays.
- Click the **Apply Configuration** button in the upper right corner of the window. The Apply Configuration popup displays.

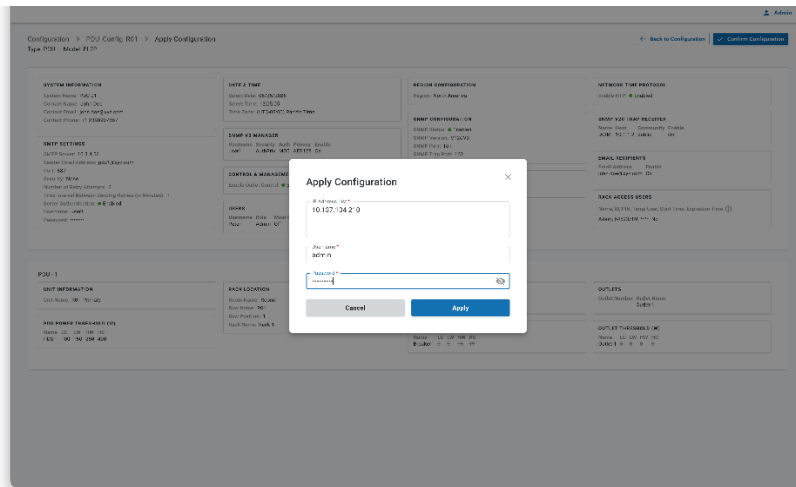


Figure 14: Apply Configuration

- Click **View Task** in the Configuration Submitted popup.

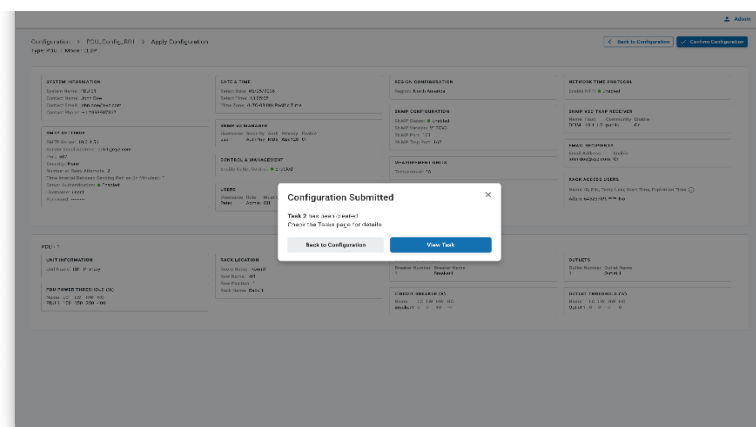


Figure 15: Configuration Submitted

Section 5 – Task Overview

After a firmware upload or configuration upload is done, a task is created and can be viewed under the **Tasks** section.

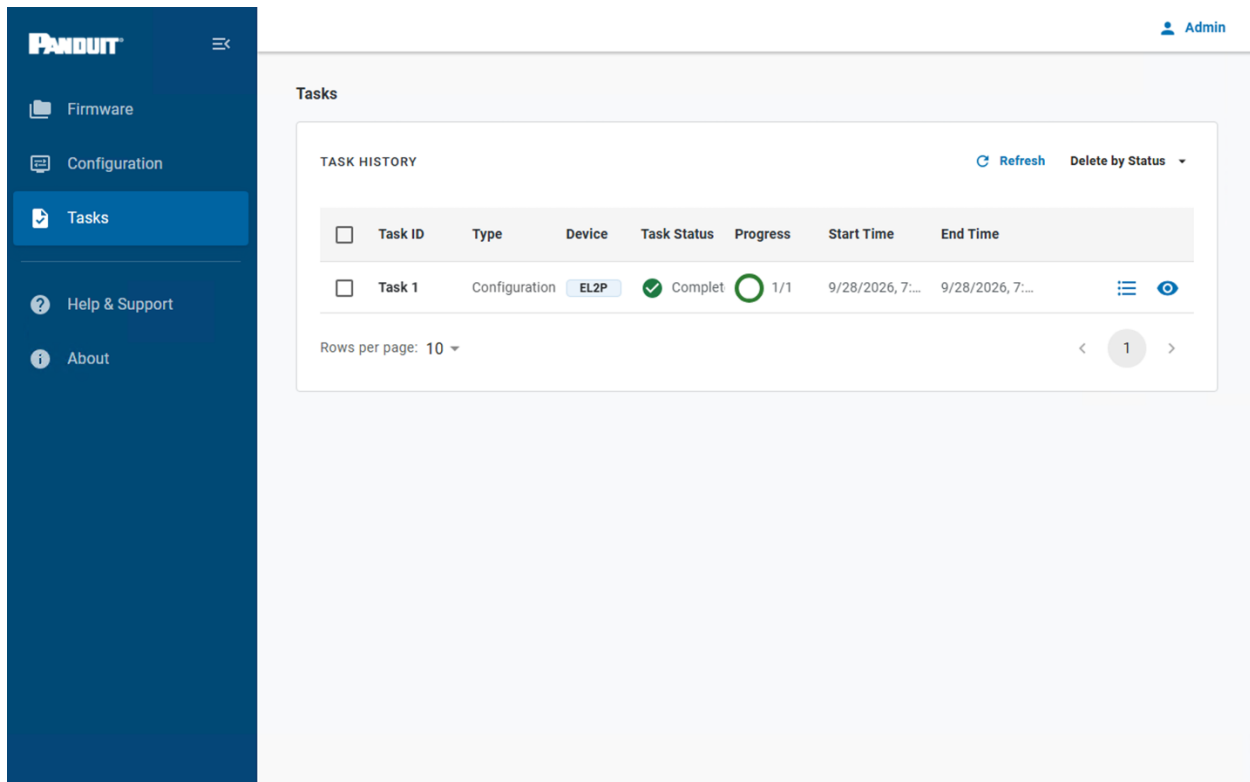


Figure 16: Task History

Option	Description
Task ID	Identifies the task for future reference
Type	Informs if the task is related to firmware or configuration
Device	Identifies the type of device
Task Status	Shows if the task for all managed devices is running, completed successfully or if it failed
Progress	Informs the progress of the task
Start Time	Informs the date/time when a task for a managed device started
End Time	Informs the date/time when a task for a managed device ended
Details (icon)	Shows the task details in a window
Eye (icon)	Recover the failed task

Managing Tasks

When a task is running, you can click the **Refresh** icon to update information related to that task.

For tasks that are completed, you can delete them by clicking the **Delete** button. Three options are available:

- Delete selected tasks: Click the check box close to the Task ID you want to delete and then click the **Delete** icon.
- Delete all completed tasks: Click the arrow next to the **Delete** button and select **Delete All Completed**.
- Delete all failed tasks: Click the arrow next to the **Delete** button and select **Delete All Failed**.

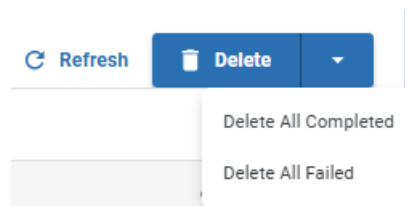


Figure 17: Task Options

When a task fails, you will see the Failed status on both the Task (Task Status) and the at the specific managed device (Device Status). Click on the **Details** icon and a drawer window will show up providing information about the error.

A failed task can be recovered for retry. Click on the **Recover** button that corresponds to the failed task. A pop-up window will appear asking you to confirm that action. You will be redirected to the specific section (Firmware or Configuration) and the username, password and IP address(es) from the failed devices will be auto filled for you.

Device Status	Start Time	End Time	Type	Task Status	
	29.07.2025 12:16 PM	29.07.2025 12:16 PM	Firmware Update	 Failed	 Recover
 Failed	29.07.2025 12:16 PM	29.07.2025 12:16 PM			

 **Firmware update failed.** Error message is shown below, please make appropriate changes and try again.
java.lang.RuntimeException: java.net.ConnectException: Failed to connect to /10.0.0.1:443

Figure 18: Failed Task

Section 6 – Help & Support

These sections provide useful information about the SiteCommand Utility.

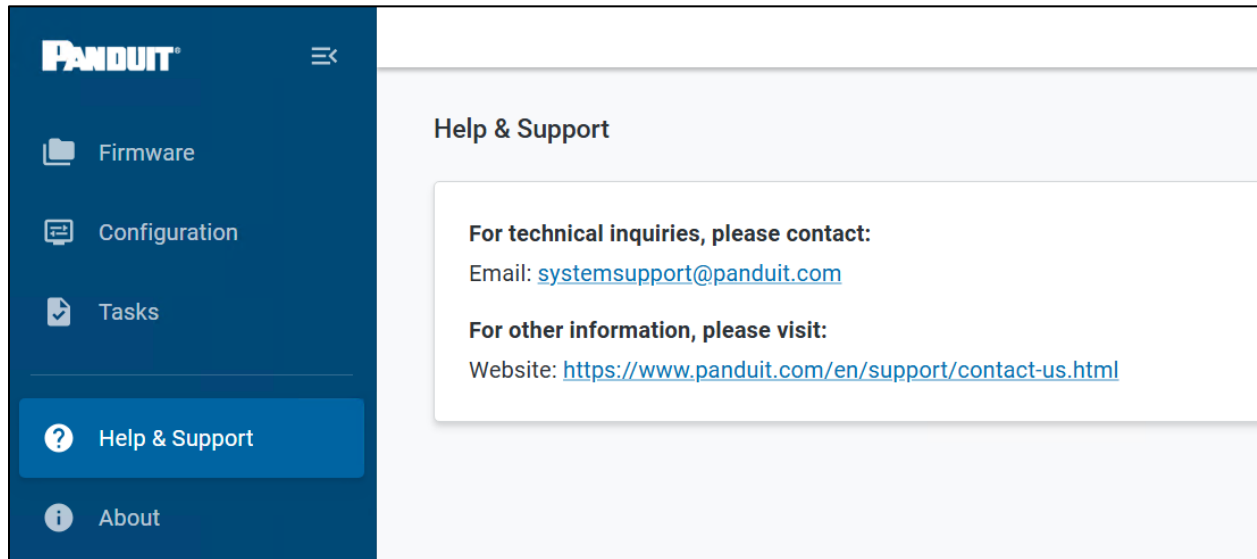


Figure 19: Help & Support Menu

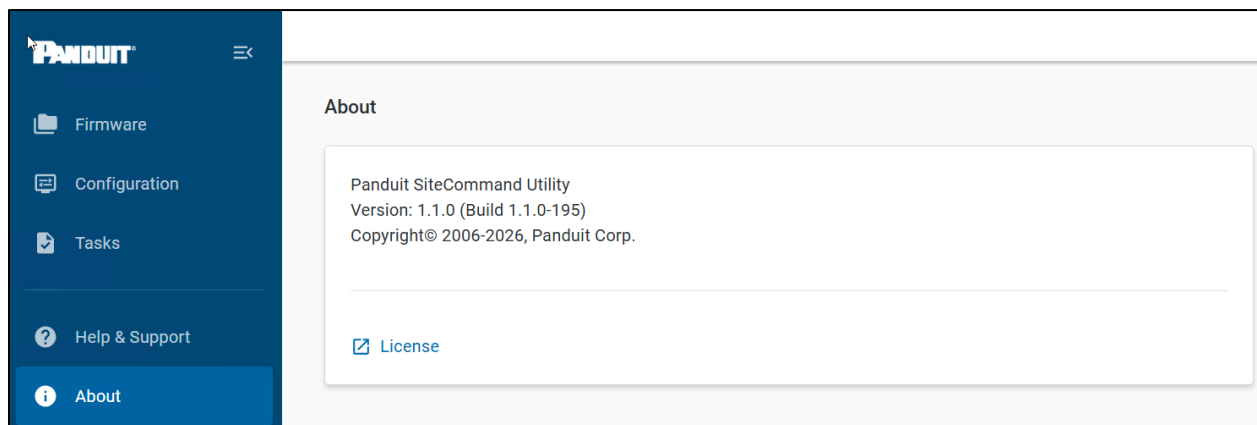


Figure 20: About Window

Appendix A: Uninstall SiteCommand Utility

If you no longer need SiteCommand Utility, you can safely uninstall it from your Windows system. The following steps are for Windows 11.

Note: You need admin privileges to proceed with these instructions.

1. Click on the Windows search option located on the taskbar.
2. Type "Add or Remove Programs" in the search box.
3. Scroll through the list or use the search bar to find **SiteCommand Utility**.

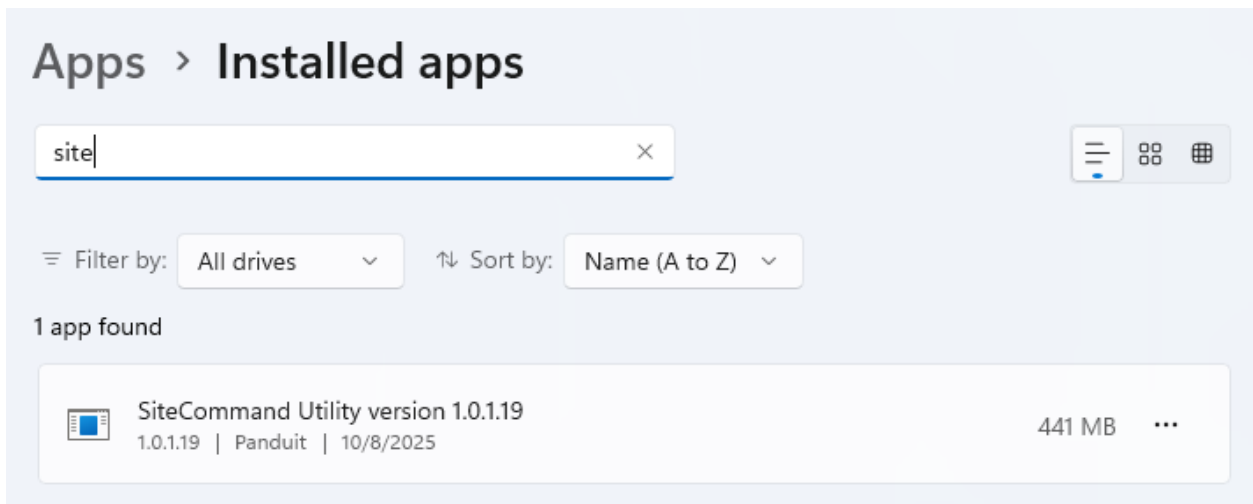


Figure 21: Installed App

4. Click on **SiteCommand Utility**, then click the **Uninstall** button, click the three-dot menu (...) and choose **Uninstall**.
5. Click on **Yes** when you are prompted with a message to confirm the uninstall process.

Note: Some uninstallations may require you to restart your computer. If prompted, save your work and proceed with a system reboot.

Appendix B: Password Reset

If you have changed the default password and cannot remember the current one, the steps below will reset the password to its default.

Note: If you don't have enough admin privileges in your computer, you might have to follow the instructions to uninstall SiteCommand Utility ([Appendix C: Uninstall SiteCommand Utility](#)) and install it again ([Appendix A: Install SiteCommand Utility](#)) in order to reset the password.

1. Using File Explorer, navigate to the directory where SiteCommand Utility was installed, (the default location is in `C:\Program Files\Panduit\SiteCommandUtility`).
2. Create a folder called “config”.
3. Create a file called `additional.properties` inside the folder “config”.
4. Open the file with a notepad application and add the following entry:
`reset.password=true`
5. Go to the Services app and restart SiteCommand Utility service (Right-click on its line and select **Restart** to restart the service or click on the **Restart** link located at the top left corner of the window).
6. Open SiteCommand Utility to login with the default password.
7. You will be prompted to change the password.
8. Go back to the directory where SiteCommand Utility was installed and delete the folder “config” that includes the file you created.
9. Go to the Services app and restart SiteCommand Utility service one last time (Right-click on its line and select **Restart** to restart the service or click on the **Restart** link located at the top left corner of the window).

Appendix C: System Restart

If your browser cannot load SiteCommand Utility login page, check if its service is running on your computer.

1. Click on the Windows search option located on the taskbar.
2. Type "services" in the search box.
3. Select the **Services** app from the search results.
4. Search for the service named SiteCommand Utility in the list.
5. Click on the service to view its status.
6. If the service is running, right-click on its line and select **Restart** to restart the service or click on the **Restart** link located at the top left corner of the window.

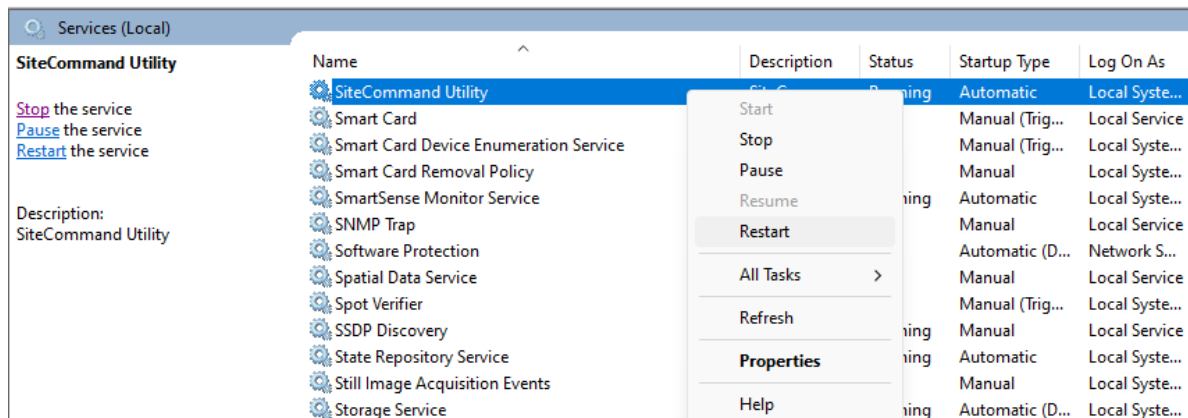


Figure 22: Restart Service

7. If the service is not running, right-click on its line and select **Start**, or click on the **Start** link located at the top left corner of the window.

Note: If you still cannot see SiteCommand Utility login page, you might have to uninstall it ([Appendix C: Uninstall SiteCommand Utility](#)) and install it again ([Appendix A: Install SiteCommand Utility](#))