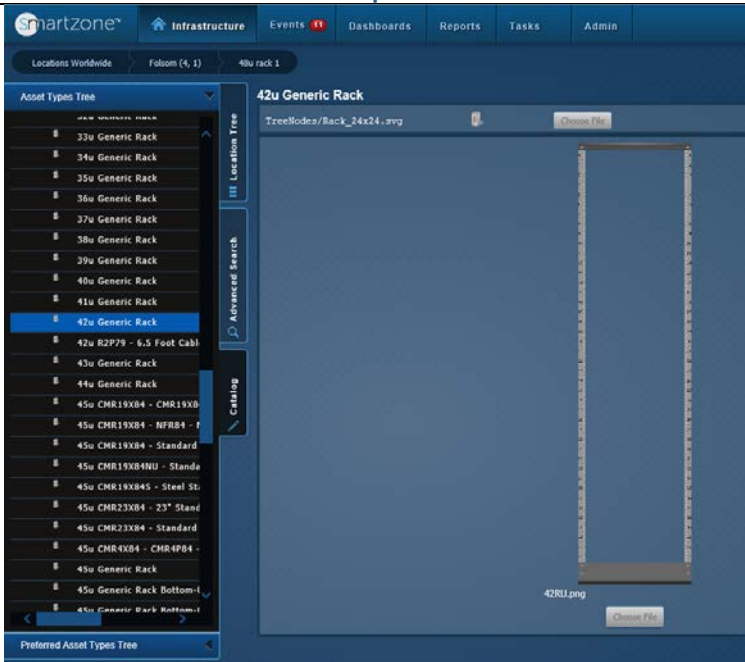
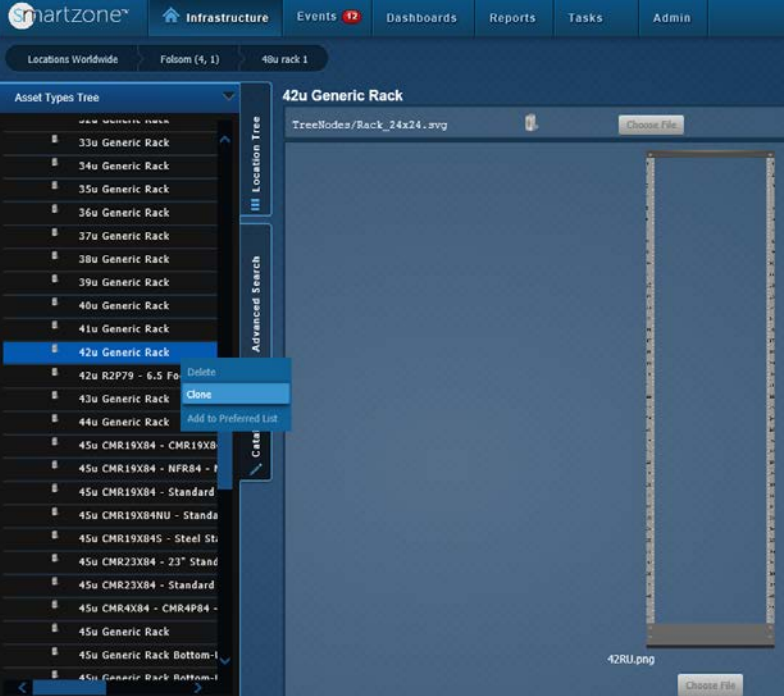
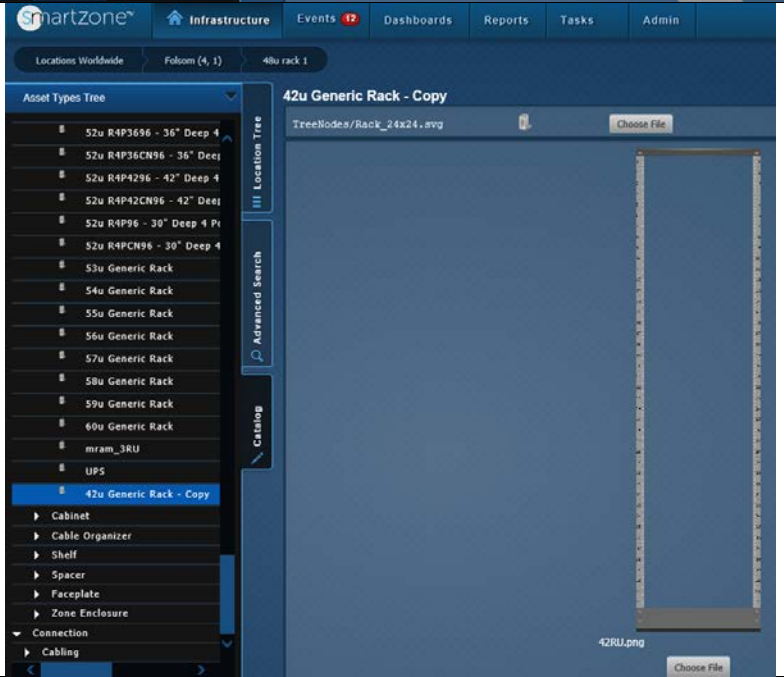
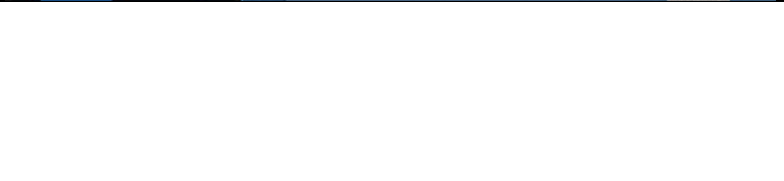
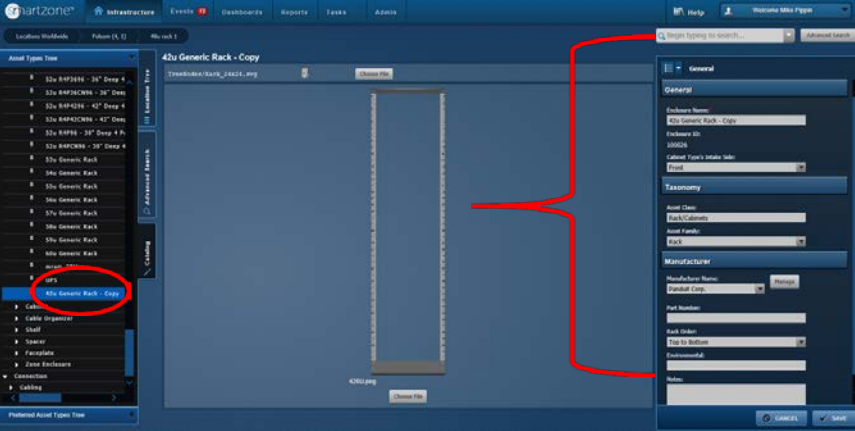
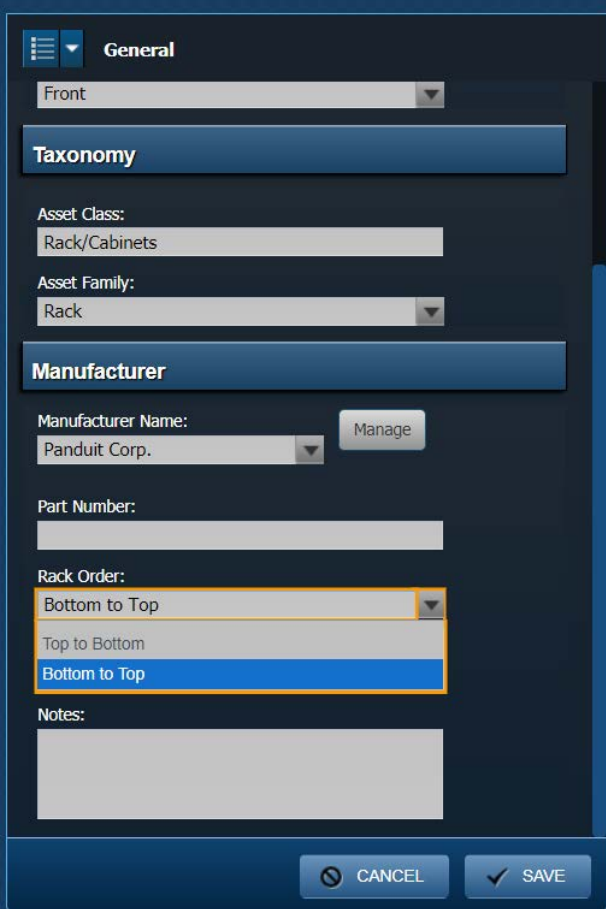




| How to Make a Reverse Rack in SmartZone |  |
|---|--|
| <b>Applies to:</b>                      | SmartZone Software                                   |
| <b>Objective:</b>                       | Create a rack with RUs numbering from top to bottom. |
| <b>Pre-Requisites:</b>                  | SmartZone 5.1.0 and later                            |

### Performing the Procedure


| Step | Instruction   | Graphic  |
|------|---|--|
| 1    | Find the desired rack size in the <b>Device Catalog</b> . In this example, <b>42u Generic Rack</b> is used. |  <p>The screenshot shows the SmartZone web interface. On the left, the 'Asset Types Tree' is expanded to show '42u Generic Rack' selected. The main area displays '42u Generic Rack' with a 'TreeNodes/Rack_24x24.png' image and a 'Choose File' button. The top navigation bar includes 'Infrastructure', 'Events', 'Dashboards', 'Reports', 'Tasks', and 'Admin'.</p> |

|          |  |  |
|----------|--|--|
| <p>2</p> | <p>Highlight the rack, right-click, and select <b>Clone</b>.</p>   |    |
| <p>3</p> | <p>Find the cloned rack in the Catalog. The cloned rack will usually appear at the bottom of the rack category. It will have <b>-Copy</b> attached to the original name.</p> |   |
| <p>4</p> | <p>Select the cloned rack on the left and look to the right-hand side for the <b>General</b> tab.</p>  |  |

|   |   |   |
|---|---|---|
|   |   |   |
| 5 | <p>Scroll down until you find <b>Rack Order</b>.</p> <p>Select the option <b>Bottom to Top</b>.</p> |  |
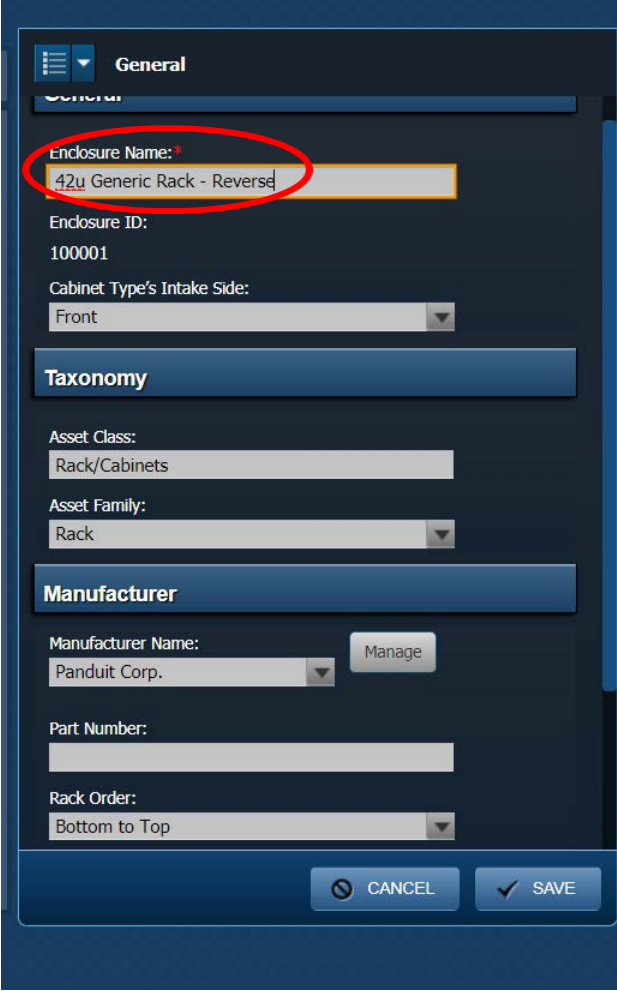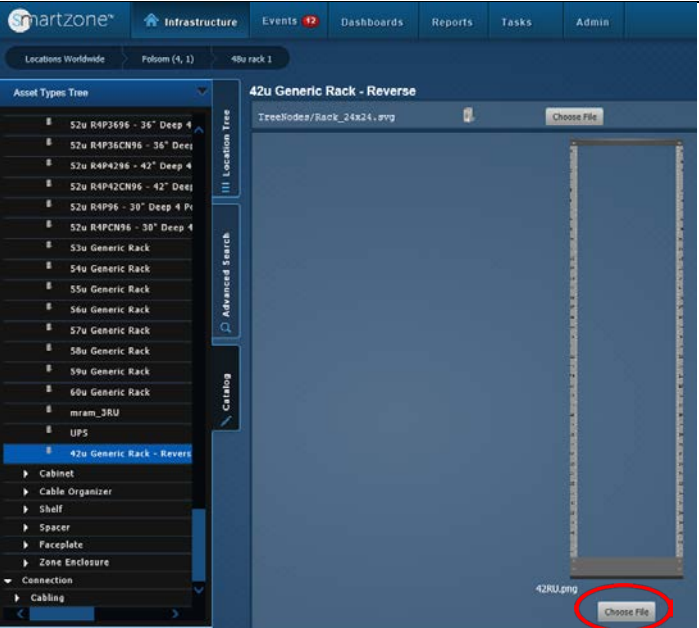
|          |   |  |
|----------|---|--|
| <p>6</p> | <p>Change the rack name if desired. I.e. "42u Generic Rack—Reverse"</p> <p>Press <b>Save</b>.</p>   |   |
| <p>7</p> | <p>Replace the default rack image with the <b>Reverse Rack</b> image.</p> <p>Select <b>Choose File</b> at the bottom of the rack image.</p> |  |

|    |   |   |
|----|---|---|
| 8  | All available rack images will display.   |   |
| 9  | Type <b>Reverse</b> into the search box to limit the rack images to the ones appropriate for reverse order racks. |   |
| 10 | Choose the <b>42RU_Reverse</b> image and select <b>Save</b> in the lower right-hand corner.                       |  |
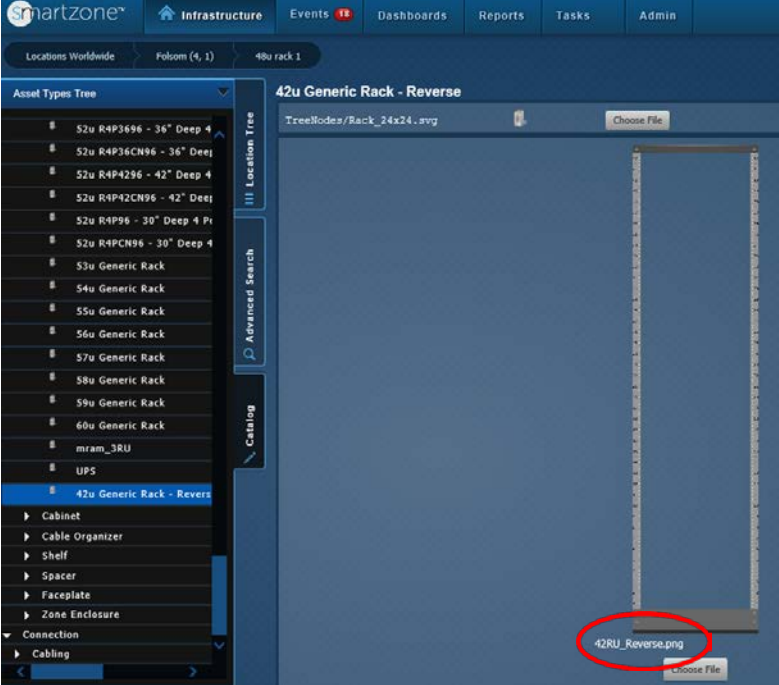
|    |  |  |
|----|--|--|
| 11 | The new rack has been added to the Catalog with an image that shows RU1 at the bottom. |  <p>The screenshot shows the Smartzone Infrastructure Catalog interface. On the left, the 'Asset Types Tree' lists various rack models, with '42u Generic Rack - Reverse' selected. On the right, the '42u Generic Rack - Reverse' page displays a file named '42RU_Reverse.png' which is circled in red. The interface includes navigation tabs like 'Locations Worldwide', 'Folsom (4, 1)', and '42u rack 1', and a top navigation bar with 'Infrastructure', 'Events', 'Dashboards', 'Reports', 'Tasks', and 'Admin'.</p> |
|----|--|--|

## End State

A with reverse numbering has been added to the Catalog.

