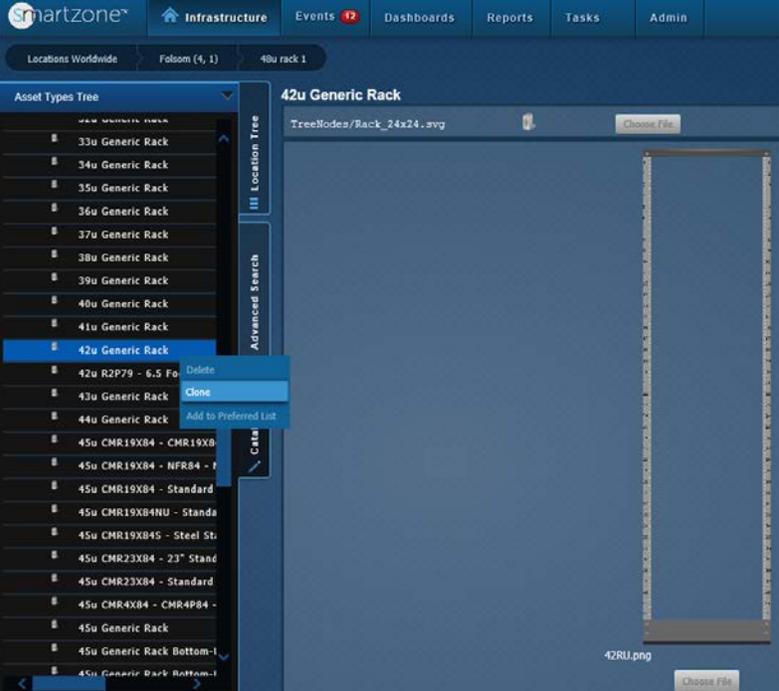
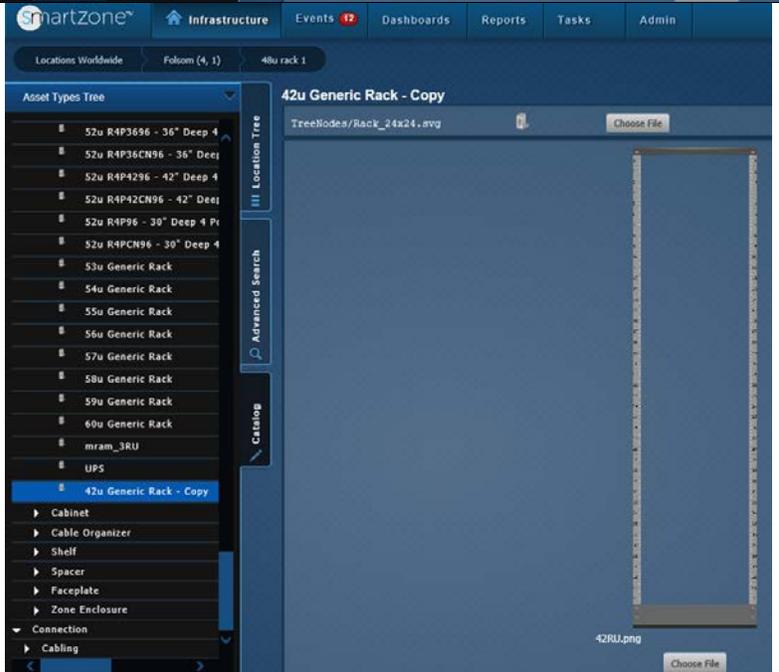
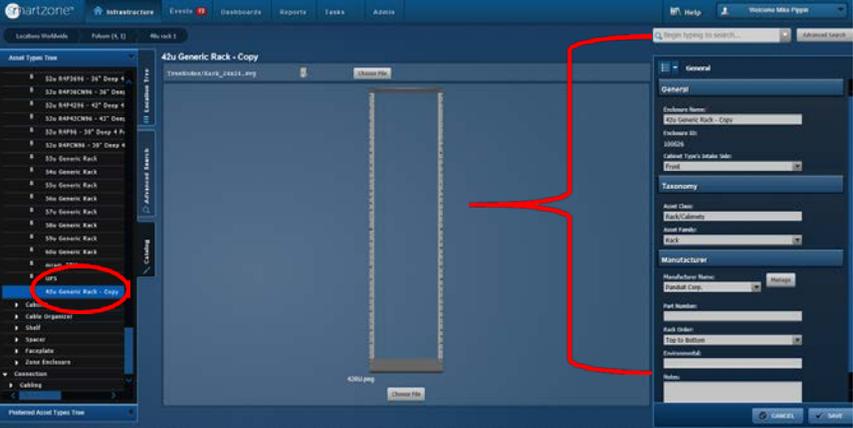
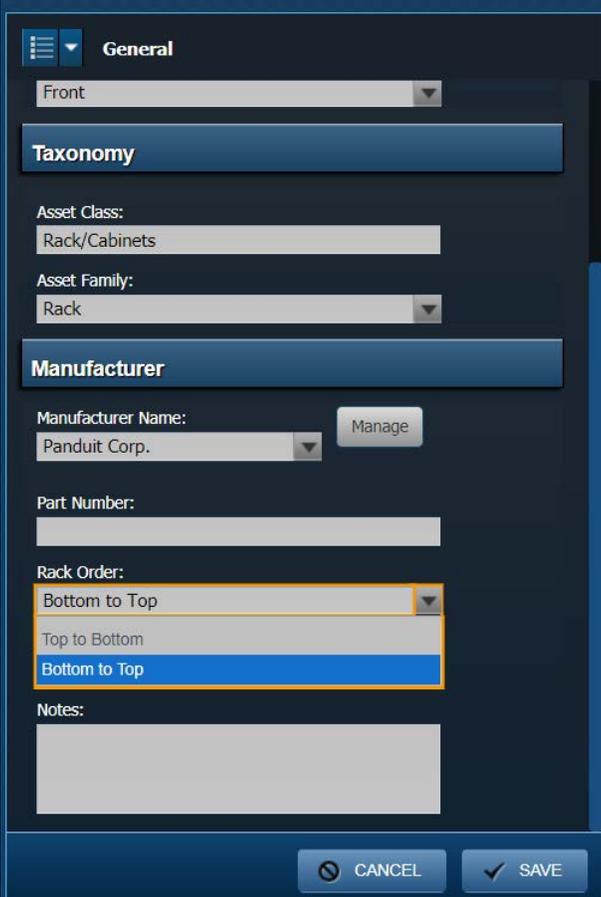


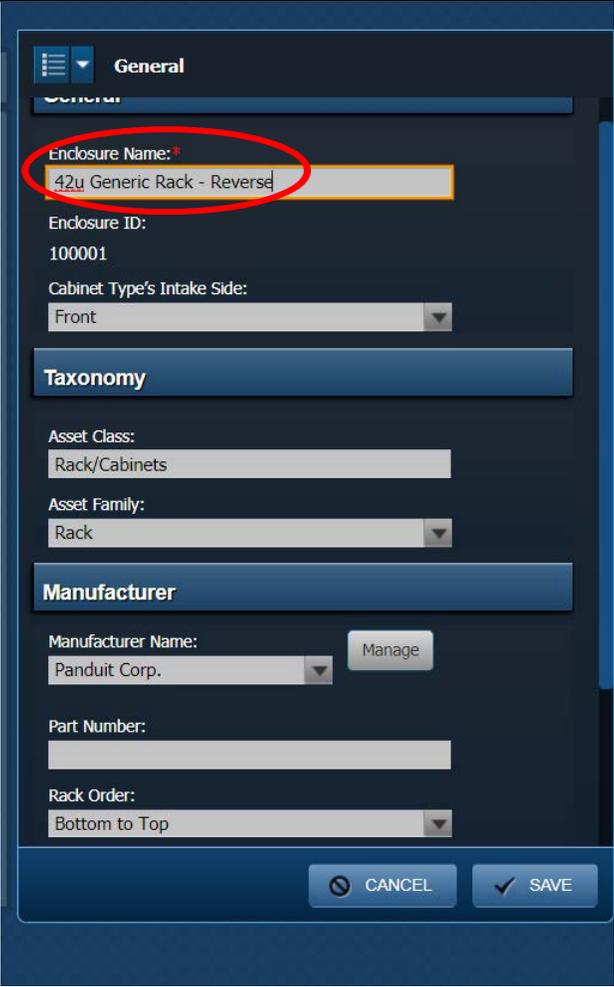
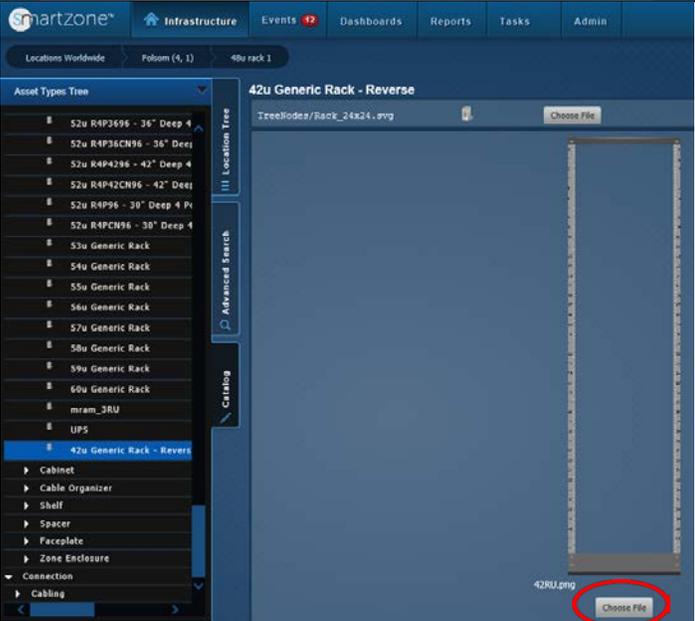
How to Make a Reverse Rack in SmartZone	
Applies to:	SmartZone Software
Objective:	Create a rack with RUs numbering from top to bottom.
Pre-Requisites:	SmartZone 5.1.0 and later

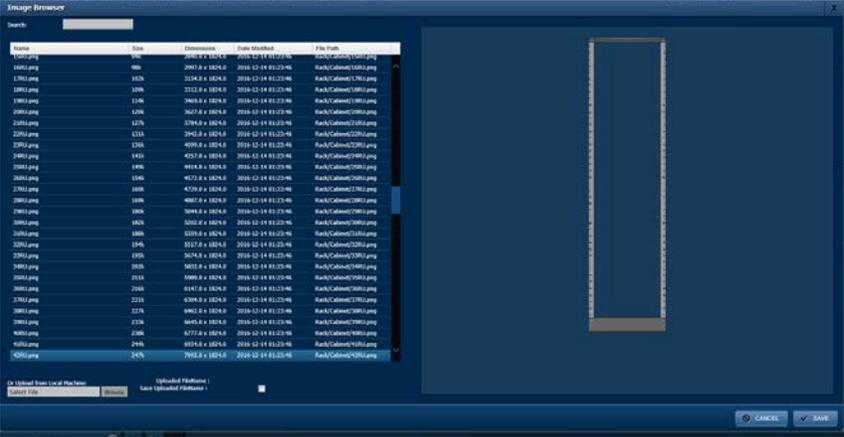
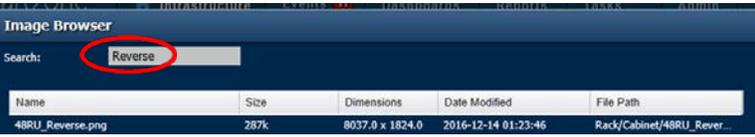
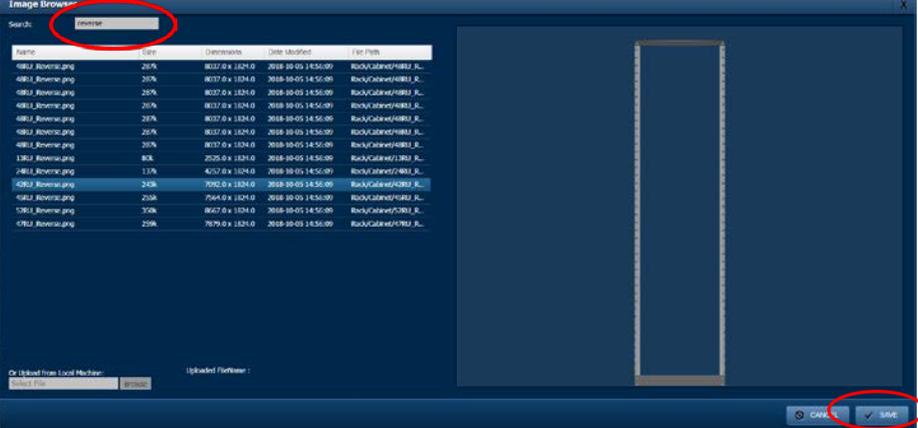
Performing the Procedure

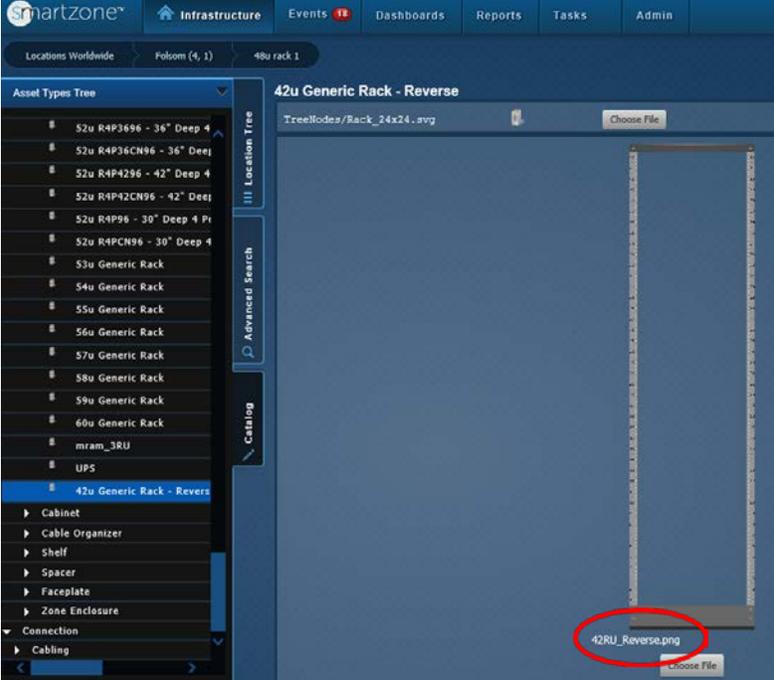
Step	Instruction	Graphic
1	Find the desired rack size in the Device Catalog . In this example, 42u Generic Rack is used.	<p>The screenshot shows the SmartZone web interface. On the left, the 'Asset Types Tree' is expanded to show various rack models. The '42u Generic Rack' is highlighted. On the right, the '42u Generic Rack' configuration page is visible, showing a diagram of the rack and a '42RU.png' file selected at the bottom.</p>

<p>2</p>	<p>Highlight the rack, right-click, and select Clone.</p>	
<p>3</p>	<p>Find the cloned rack in the Catalog. The cloned rack will usually appear at the bottom of the rack category. It will have -Copy attached to the original name.</p>	
<p>4</p>	<p>Select the cloned rack on the left and look to the right-hand side for the General tab.</p>	

		
5	Scroll down until you find Rack Order . Select the option Bottom to Top .	

<p>6</p>	<p>Change the rack name if desired. I.e. "42u Generic Rack—Reverse"</p> <p>Press Save.</p>	
<p>7</p>	<p>Replace the default rack image with the Reverse Rack image.</p> <p>Select Choose File at the bottom of the rack image.</p>	

<p>8</p>	<p>All available rack images will display.</p>											
<p>9</p>	<p>Type Reverse into the search box to limit the rack images to the ones appropriate for reverse order racks.</p>	 <table border="1" data-bbox="643 772 1382 825"> <thead> <tr> <th>Name</th> <th>Size</th> <th>Dimensions</th> <th>Date Modified</th> <th>File Path</th> </tr> </thead> <tbody> <tr> <td>48RU_Reverse.png</td> <td>287k</td> <td>8037.0 x 1824.0</td> <td>2016-12-14 01:23:46</td> <td>Rack/Cabinet/48RU_Rever...</td> </tr> </tbody> </table>	Name	Size	Dimensions	Date Modified	File Path	48RU_Reverse.png	287k	8037.0 x 1824.0	2016-12-14 01:23:46	Rack/Cabinet/48RU_Rever...
Name	Size	Dimensions	Date Modified	File Path								
48RU_Reverse.png	287k	8037.0 x 1824.0	2016-12-14 01:23:46	Rack/Cabinet/48RU_Rever...								
<p>10</p>	<p>Choose the 42RU_Reverse image and select Save in the lower right-hand corner.</p>											

11	The new rack has been added to the Catalog with an image that shows RU1 at the bottom.	 <p>The screenshot shows the Smartzone Infrastructure Catalog interface. On the left, the 'Asset Types Tree' lists various rack models, with '42u Generic Rack - Reverse' selected. On the right, the '42u Generic Rack - Reverse' page displays a file named '42RU_Reverse.png' at the bottom, which is circled in red. The interface includes navigation tabs like 'Locations Worldwide', 'Folsom (4, 1)', and '42u rack 1', and a top navigation bar with 'Infrastructure', 'Events', 'Dashboards', 'Reports', 'Tasks', and 'Admin'.</p>
----	--	---

End State

A with reverse numbering has been added to the Catalog.

