


2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:  
1. IDENTIFICATION: VERTICAL, MIXED (24) C-13 & (6) C-19 NETWORKED 208V / 30A / THREE-PHASE DELTA POU

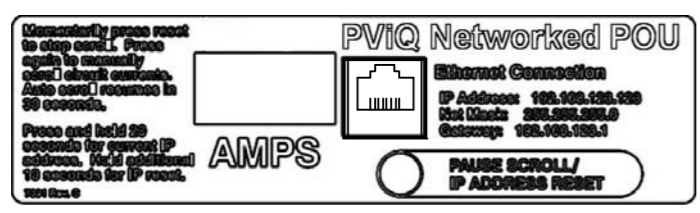


DETAIL A (SCALE 4X)

PANDUIT P/N	WEIGHT
QZ1B1N3BN30P1	17 lb (7.7 kg)


PART NO. QZ1B1N3BN30P1  
COLOR BLACK

2. ACCESSORY COMPONENTS:  
(4) #10-32 x 1/2" MOUNTING SCREWS  
(4) #12-24 x 1/2" MOUNTING SCREWS  
(2) #10-32 LOCKING COLLAR SCREWS  
(2) L-BRACKETS


3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. CURRENT METER - RED, 4-DIGIT LED DISPLAY PROVIDES TRUE RMS CURRENT THAT CONTINUOUSLY SCROLLS THROUGH THE THREE DIFFERENT MEASURED CIRCUITS. METER DISPLAYS CIRCUIT NAME FOLLOWED BY THE MEASURED CURRENT (E.G. CR-1 REPRESENTS PHASE 1). BREAKER/CIRCUIT (XY,YZ,ZX) LEVEL MONITORING CAN ALSO BE ACCESSED REMOTELY VIA ETHERNET CONNECTION.
5. UL® & c-UL® LISTED 60950.
6. RoHS COMPLIANT.
7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
8. MAXIMUM AVAILABLE POWER = 8.6 KW

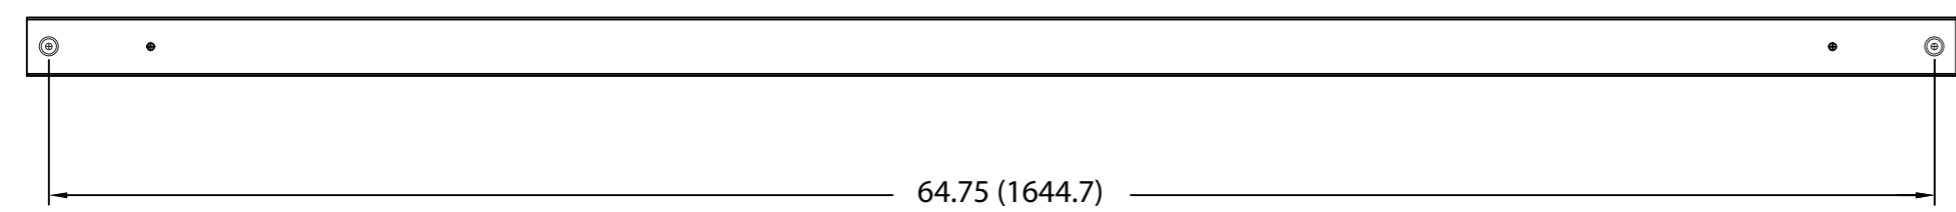

TOOLESS MOUNTING BUTTON LOCATION

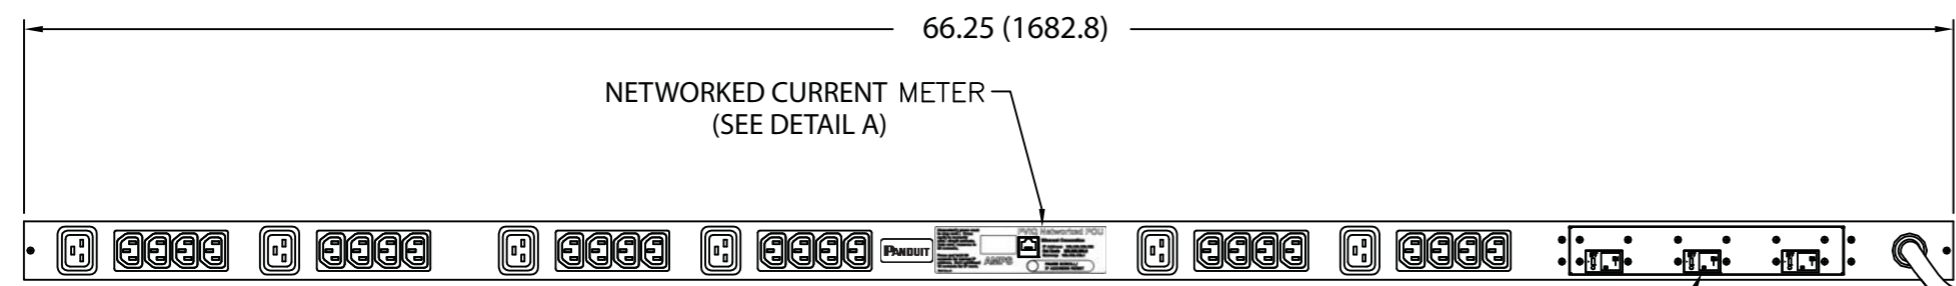


NETWORKED CURRENT METER (SEE DETAIL A)

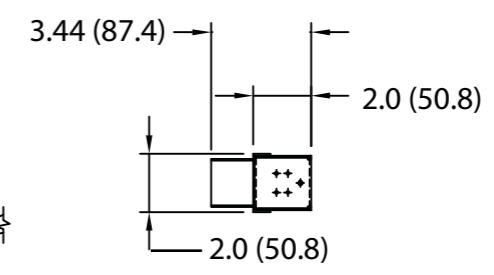

10 FOOT INLET POWER CORD

20 AMP, 2 POLE UL LISTED ELECTRO MECHANICAL SWITCH/BREAKER 3 PLACES

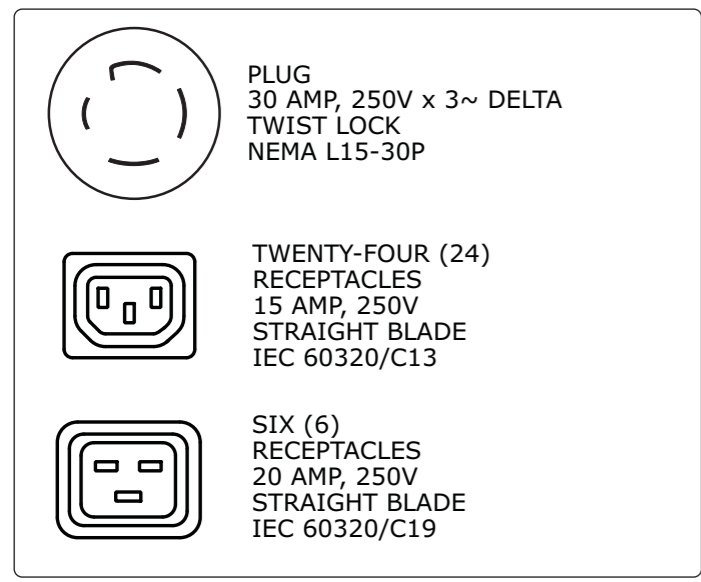

00A	11-23-10	MAV	KRKE	RELEASED TO PRODUCTION	09V098UA														
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D									

MODEL FILENAME	09V098UA/00.PRT
CAD FILENAME/LAYERS	09V098UA_DC/00A.PRT
<b>PANDUIT</b> CORP TINLEY PARK, ILLINOIS	
VERTICAL, MIXED (24) C-13 & (6) C-19 NETWORKED POWER OUTLET UNIT (QZ1B1N3BN30P1) CUSTOMER DRAWING	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: INCHES X.X +/- 0.03 [METRIC - MILLIMETER] X.X +/- 0.8 ANGLE X.XX +/- 0.015 X.X +/- 0.4 +/- 1° X.XXX +/- 0.005 X.XX +/- 0.13	
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	SCALE NONE
DRAWN BY MAV	MAT'L:
DATE 11-23-10	
DWG NO. 09V098UA	DWG SIZE B

2



1