

FiberRunner® 2x2 Routing System

SPECIFICATIONS

The 2x2 routing system shall be a system of channel, fittings, and brackets designed to segregate, route, and protect fiber optic and high performance copper cabling. Channel and fittings shall be assembled using pre-assembled couplers. A selection of spillout options shall be available that easily attach using the vertical tee. Fittings maintain a minimum 2" bend radius to protect against signal loss due to excessive cable bends. Available system colors shall be yellow and black. A full complement of brackets shall be available for attaching system components to ladder rack, threaded rod, auxiliary framing, strut, equipment racks and raised floor pedestals.



TECHNICAL INFORMATION

Attributes	Cable In. (mm)	No. of Cables
Open channel 50% fill capacity: (2" pile up)	0.06 (1.6)	8,183
	0.07 (2.0)	5,237
	0.11 (3.0)	2,327
Fiber optic ribbon interconnect:	0.20 (5.2)	773
Category 6:	0.25 (6.4)	519
Category 6A:	0.29 (7.6)	336
Material:	Rigid PVC (Channel) PC/ABS (Fittings)	
Flammability:	94V-0	
Approvals:	UL Listed to 2024A Optical Fiber Cable Routing Assemblies Compliant with the applicable tests in Telcordia GR-63-CORE Network Equipment Building Systems Level 3	
CSI Spec Form	LP-CSISPEC-FR	

KEY FEATURES AND BENEFITS

Fastest installations:	No bolts need to be tightened and no tools are required when installing the QuikLock™ Coupler; QuikLock™ Couplers take less than five seconds to make a mechanically secure connection
Easy to maintain:	Hinged channel cover, hinged door vertical tee and solid fitting covers protect cabling and provide fast and easy access for future cabling moves, adds, and changes
System strength:	Robust system of channel, covers, fittings and other non-metallic system components protect cable from physical damage; system includes full range of directional and spillout fittings
Versatility:	The vertical tee accepts a three-sided trumpet, transition to corrugated tubing and Panduit® FiberRunner® Systems and Fiber-Duct™ Systems
Cable protection:	A minimum 2" bend radius maintained throughout all fittings prevents excessive bends in fiber optic cabling

Channel and Cover

2x2 solid hinged channel (6'):	HS2X2**10NM
2x2 slotted hinged channel (6'):	H2X2**10
2x2 hinged cover (6'):	HC2**10
Cable retainer:	WR2-C

Fittings and Spillouts

QuikLock™ coupler:	FBC2X2L**
Horizontal right angle:	FRA2X2L**
Horizontal tee:	FT2X2L**
4-way cross:	FFWC2X2L**
End cap:	FHDEC2X2L**
Inside vertical 45°:	FIV452X2L**
Outside vertical 45°:	FOV452X2L**
Inside vertical 90°:	FIV902X2L**
Outside vertical 90°:	FOV902X2L**
FiberRunner® vertical tee to 2" x 2" vertical cable manager kit:	FRF42L**
4x4 FiberRunner® to 2x2 reducer:	FRRF4FD2L**
Vertical tee:	FVTHD2X2L**
Three-sided BRC trumpet spillout:	FTR2X2L**
2" x 2" 1-port spillout for vertical tee	FIDT2X2L**
FiberRunner® 2x2 vertical cable manager kit	FRHD2KT**
2x2 FiberRunner® bend radius control trumpet	TRC2HDLBL

Mounting Brackets

Existing 1/2" threaded rod bracket:	FTRBE12
Existing 5/8" threaded rod bracket:	FTRBE58
New 1/2" threaded rod bracket:	FTRBN12
New 5/8" threaded rod bracket:	FTRBN58
Underfloor bracket:	FUSB
Ladder rack bracket:	FLRB
"L" wallmount bracket:	FLB
Adjustable "Z" bracket:	FZBA1.5X4
Low profile "Z" bracket:	FZBLP
Two-piece ladder rack bracket 1/2" threaded rod:	F2PCLB12
Two-piece ladder rack bracket 5/8" threaded rod:	F2PCLB58
Two-piece framing clip 5/8" threaded rod to 9/16" C-channel aux. framing bars:	FRAFC58


**Substitute: YL = Yellow, BL = Black

FiberRunner® 2x2 Routing System


APPLICATIONS

The FiberRunner® 2x2 Routing System is a system of channel, fittings, and brackets designed to segregate, route, and protect fiber optic and high performance copper cabling. It is suited for data center applications where cable is routed from distribution areas to equipment cabinets or racks. It is used in Telco Central Offices to route fiber optic jumper cables between fiber distribution frames and equipment bays. It can be deployed over the racks or in approved underfloor applications. Channel and fittings are assembled using timesaving Panduit® QuikLock™ Couplers. A selection of spillout options is available that easily attach using the vertical tee. Fittings maintain a 2" bend radius to protect against signal loss due to excessive cable bends. Available system colors are yellow and black to differentiate various types of cabling. A full complement of brackets is available to attach system components to support structures found in all applications. The FiberRunner® 2x2 Routing System is part of the Panduit® complete fiber distribution system, which includes the FiberRunner® 24x4, 6x4, 4x4, and 2x2 Routing Systems, Wire Basket Overhead Cable Tray Routing System, and racks.

CHANNEL AND COVER




HS2X2**10NM



H2X2**10




HC2**10




WR2-C


FITTINGS, SPLIT COVERS, AND SPOULLOTS




FBC2X2L**



FRA2X2L**




FT2X2L**




FFWC2X2L**




FHDEC2X2L**




FIV452X2L**




FOV452X2L**




FIVRA2X2L**




FOVRA2X2L**




FRF42L**



FRRF4FD2L**



FVTHD2X2L**




FTR2X2**



FIDT2X2**




FRHD2KT**




TRC2HDLBL


QUIKLOCK™ MOUNTING BRACKETS




FTRBE12
FTRBE58




FTRBN12
FTRBN58




FUSB




FLRB




FLB



FZBA1.5X4



FZBLP




F2PCLB12
F2PCLB58



FRAFC58

**Substitute: YL= Yellow, BL= Black

ENGINEERING DRAWINGS

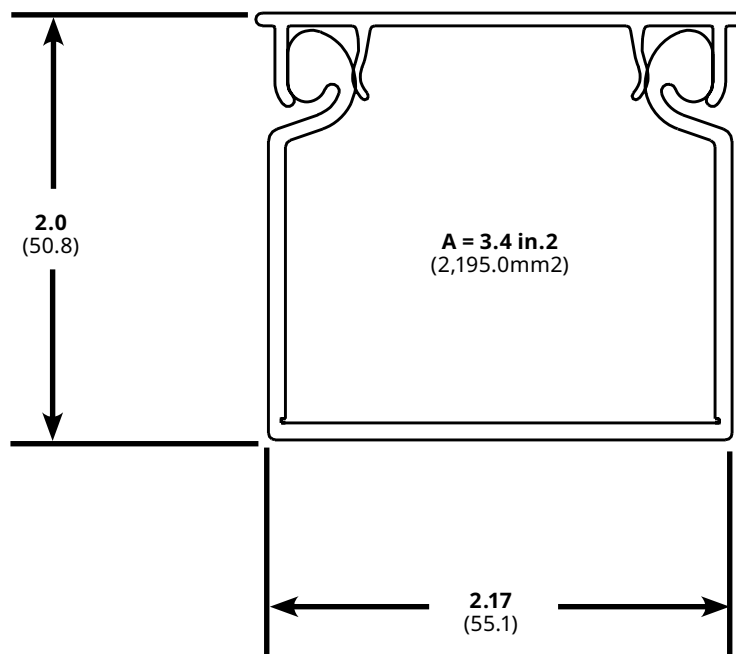

Dimensions are in inches. [Dimensions in brackets are metric].